

ELKAY®

SPECIFICATIONS

EZH20™ System - Filtered Vandal-Resistant Cooler/Bottle Filling Station Models LVRC(8,D)WSK & LVRCTL(8,DD)WSK

PRODUCT FEATURES


- Vandal-resistant design ideal for high-traffic installations.
- Green Ticker™ indicates the quantity of plastic water bottles saved from waste. Protected behind tempered glass.
- Easy-to-operate vandal-resistant pushbutton activation.
- Quick bottle fill rate - 1.1 GPM on refrigerated models; 1.5 GPM on non-refrigerated
- Laminar flow provides minimal splash with 30-second auto shut-off. Recessed orifice to prevent contamination.
- Vandal-resistant bubbler on basin.
- Real drain system – no standing water for disposal.
- WaterSentry® Plus 3000-gallon capacity filter included with LED visual filter indicating when replacement is needed.
- Embossed graphics to ease of usability

SUGGESTED SPECIFICATION

Models LVRC(TL)8WSK shall provide 8.0 GPH of 50°F water at 90°F ambient and 80°F inlet water. Models LVRC(TLD)DWSK shall provide ambient drinking water. Stainless steel construction. Shall include real drain system. Shall include tamper-resistant pushbutton activation. Bottle Filler shall provide 1.1-1.5 GPM flow rate with recessed orifice, laminar flow and 30-second auto water shut-off. Shall include Green Ticker to display the quantity of plastic water bottles saved with tempered glass protection. Shall include the WaterSentry Plus filter, certified to NSF/ANSI 42 and 53 for reduction of lead, chlorine, particulate, and taste and odor. Shall meet ADA guidelines. Shall be lead-free design and compliant with NSF/ANSI 61 and 372. Shall be compliant with UL399 and CAN/CSA 22.2 No. 120.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change specifications without notice. Please visit elkayusa.com for most current version.

IMAGES

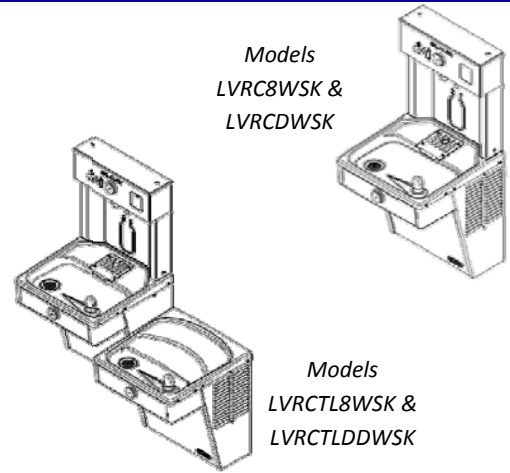

- 51300C Replacement filters (available as single or in packs of 3, 12, 24 or 48)
- 36292C Receptacle Plug

ACCESSORIES

Ideal in high-traffic installations such as:

- Educational facilities
- Indoor recreational areas

APPLICATIONS

Compliant to:

- UL399 and CAN/CSA 22.2 No. 120
- NSF/ANSI-61
- NSF/ANSI 372 (Lead-Free Compliance)
- NSF/ANSI 42 & 53 (filtration)
- ADA Standards for Accessible Design



2222 Camden Court
Oak Brook, IL 60523
Phone: 630-572-3192
Web: Elkayusa.com


© 2012 Elkay
(2/2012)

**EZH2O™ System - Filtered
Vandal-Resistant Cooler/Bottle Filling Station
Models LVRC8WSK & LVRCDWSK**

ELKAY®
ROUGH-IN DIMENSIONS

Job Name: _____
 Date: _____ Qty: _____
 Contact Info (Name, Phone, Email, Fax): _____

 Approval for Manufacture (Signature & Date): _____

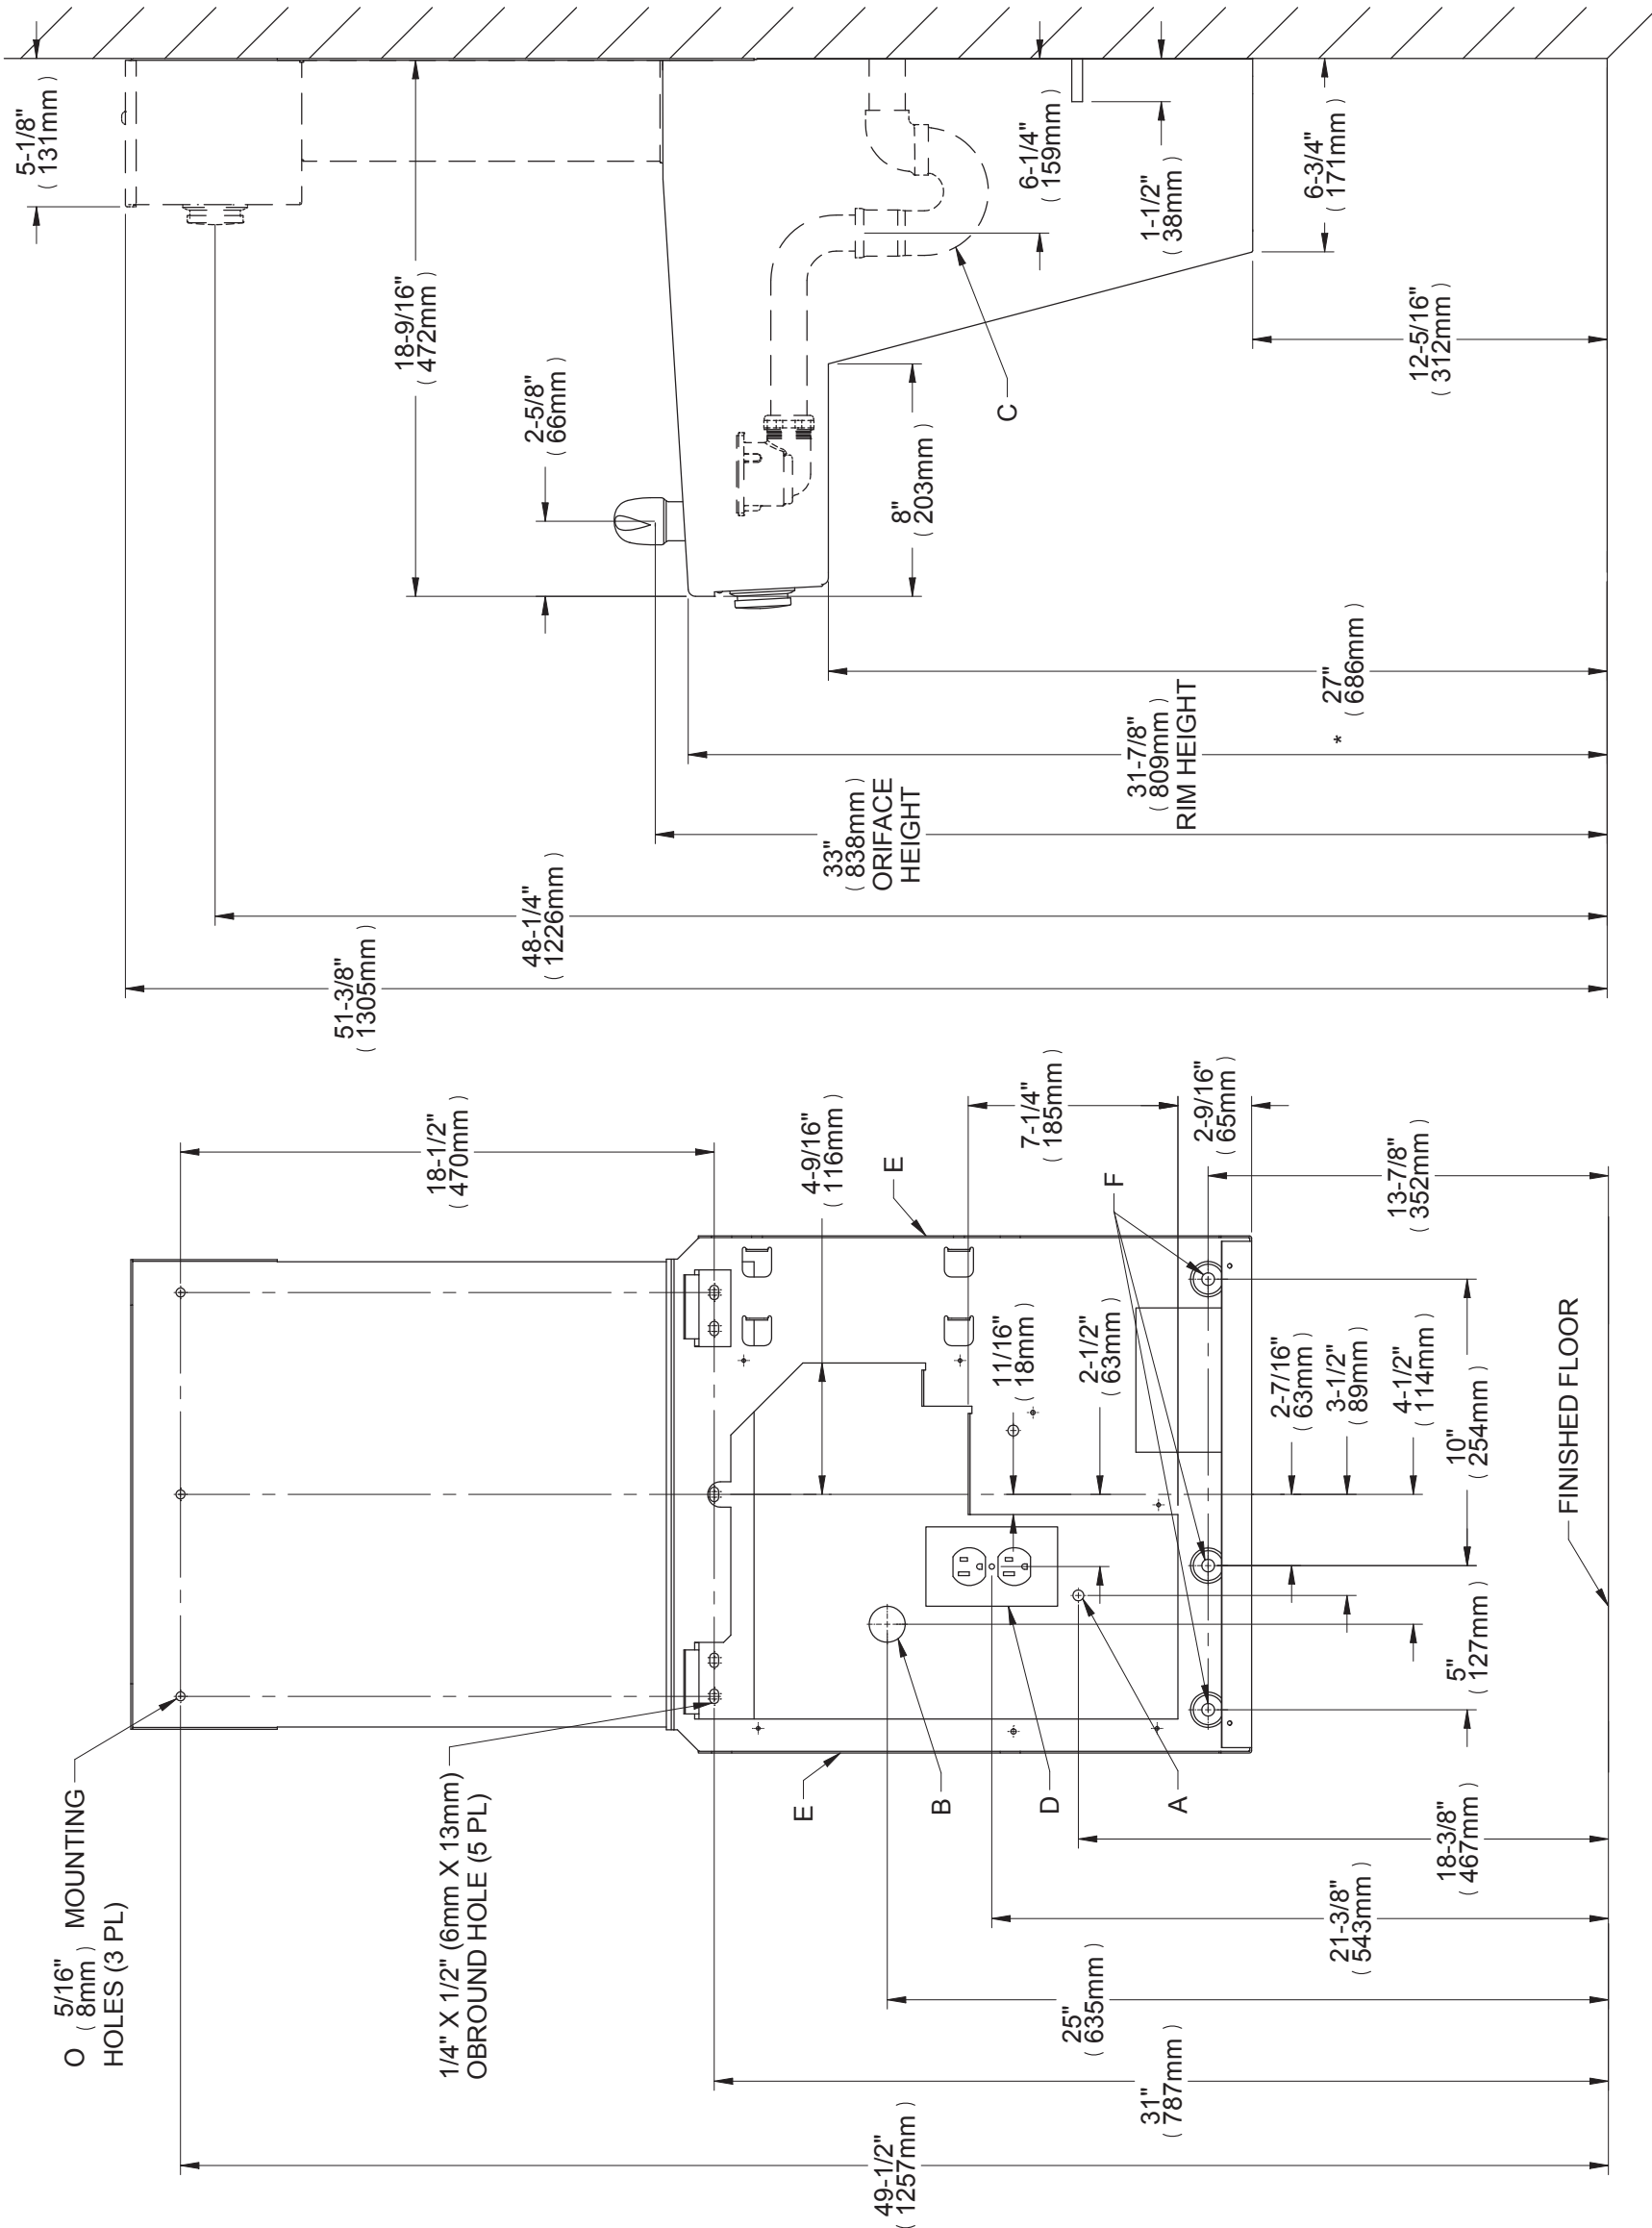


LEGEND:
 A = Recommended Water Supply Location. Shut-off Valve (not furnished) to accept 3/8" O.D. unplated copper tube.
 B = 3" (76mm) maximum out from wall.
 C = Recommended Waste Outlet Location. To accommodate 1-1/2" nominal drain.
 D = 1-1/4" Trap (not furnished)
 E = Electrical Supply (3) Wire Recessed Box Duplex Outlet
 F = Insure proper ventilation by maintaining 6" (152mm) minimum clearance from cabinet louvers to wall.
 F = 7/16" bolt holes for fastening unit to wall

**EZH20™ System - Filtered
Vandal-Resistant Cooler/Bottle Filling Station
Models LVRCTL8WSK & LVRCTLDDWSK**

ELKAY®
ROUGH-IN DIMENSIONS

Job Name: _____
 Date: _____ Qty: _____
 Contact Info (Name, Phone, Email, Fax): _____

 Approval for Manufacture (Signature & Date): _____

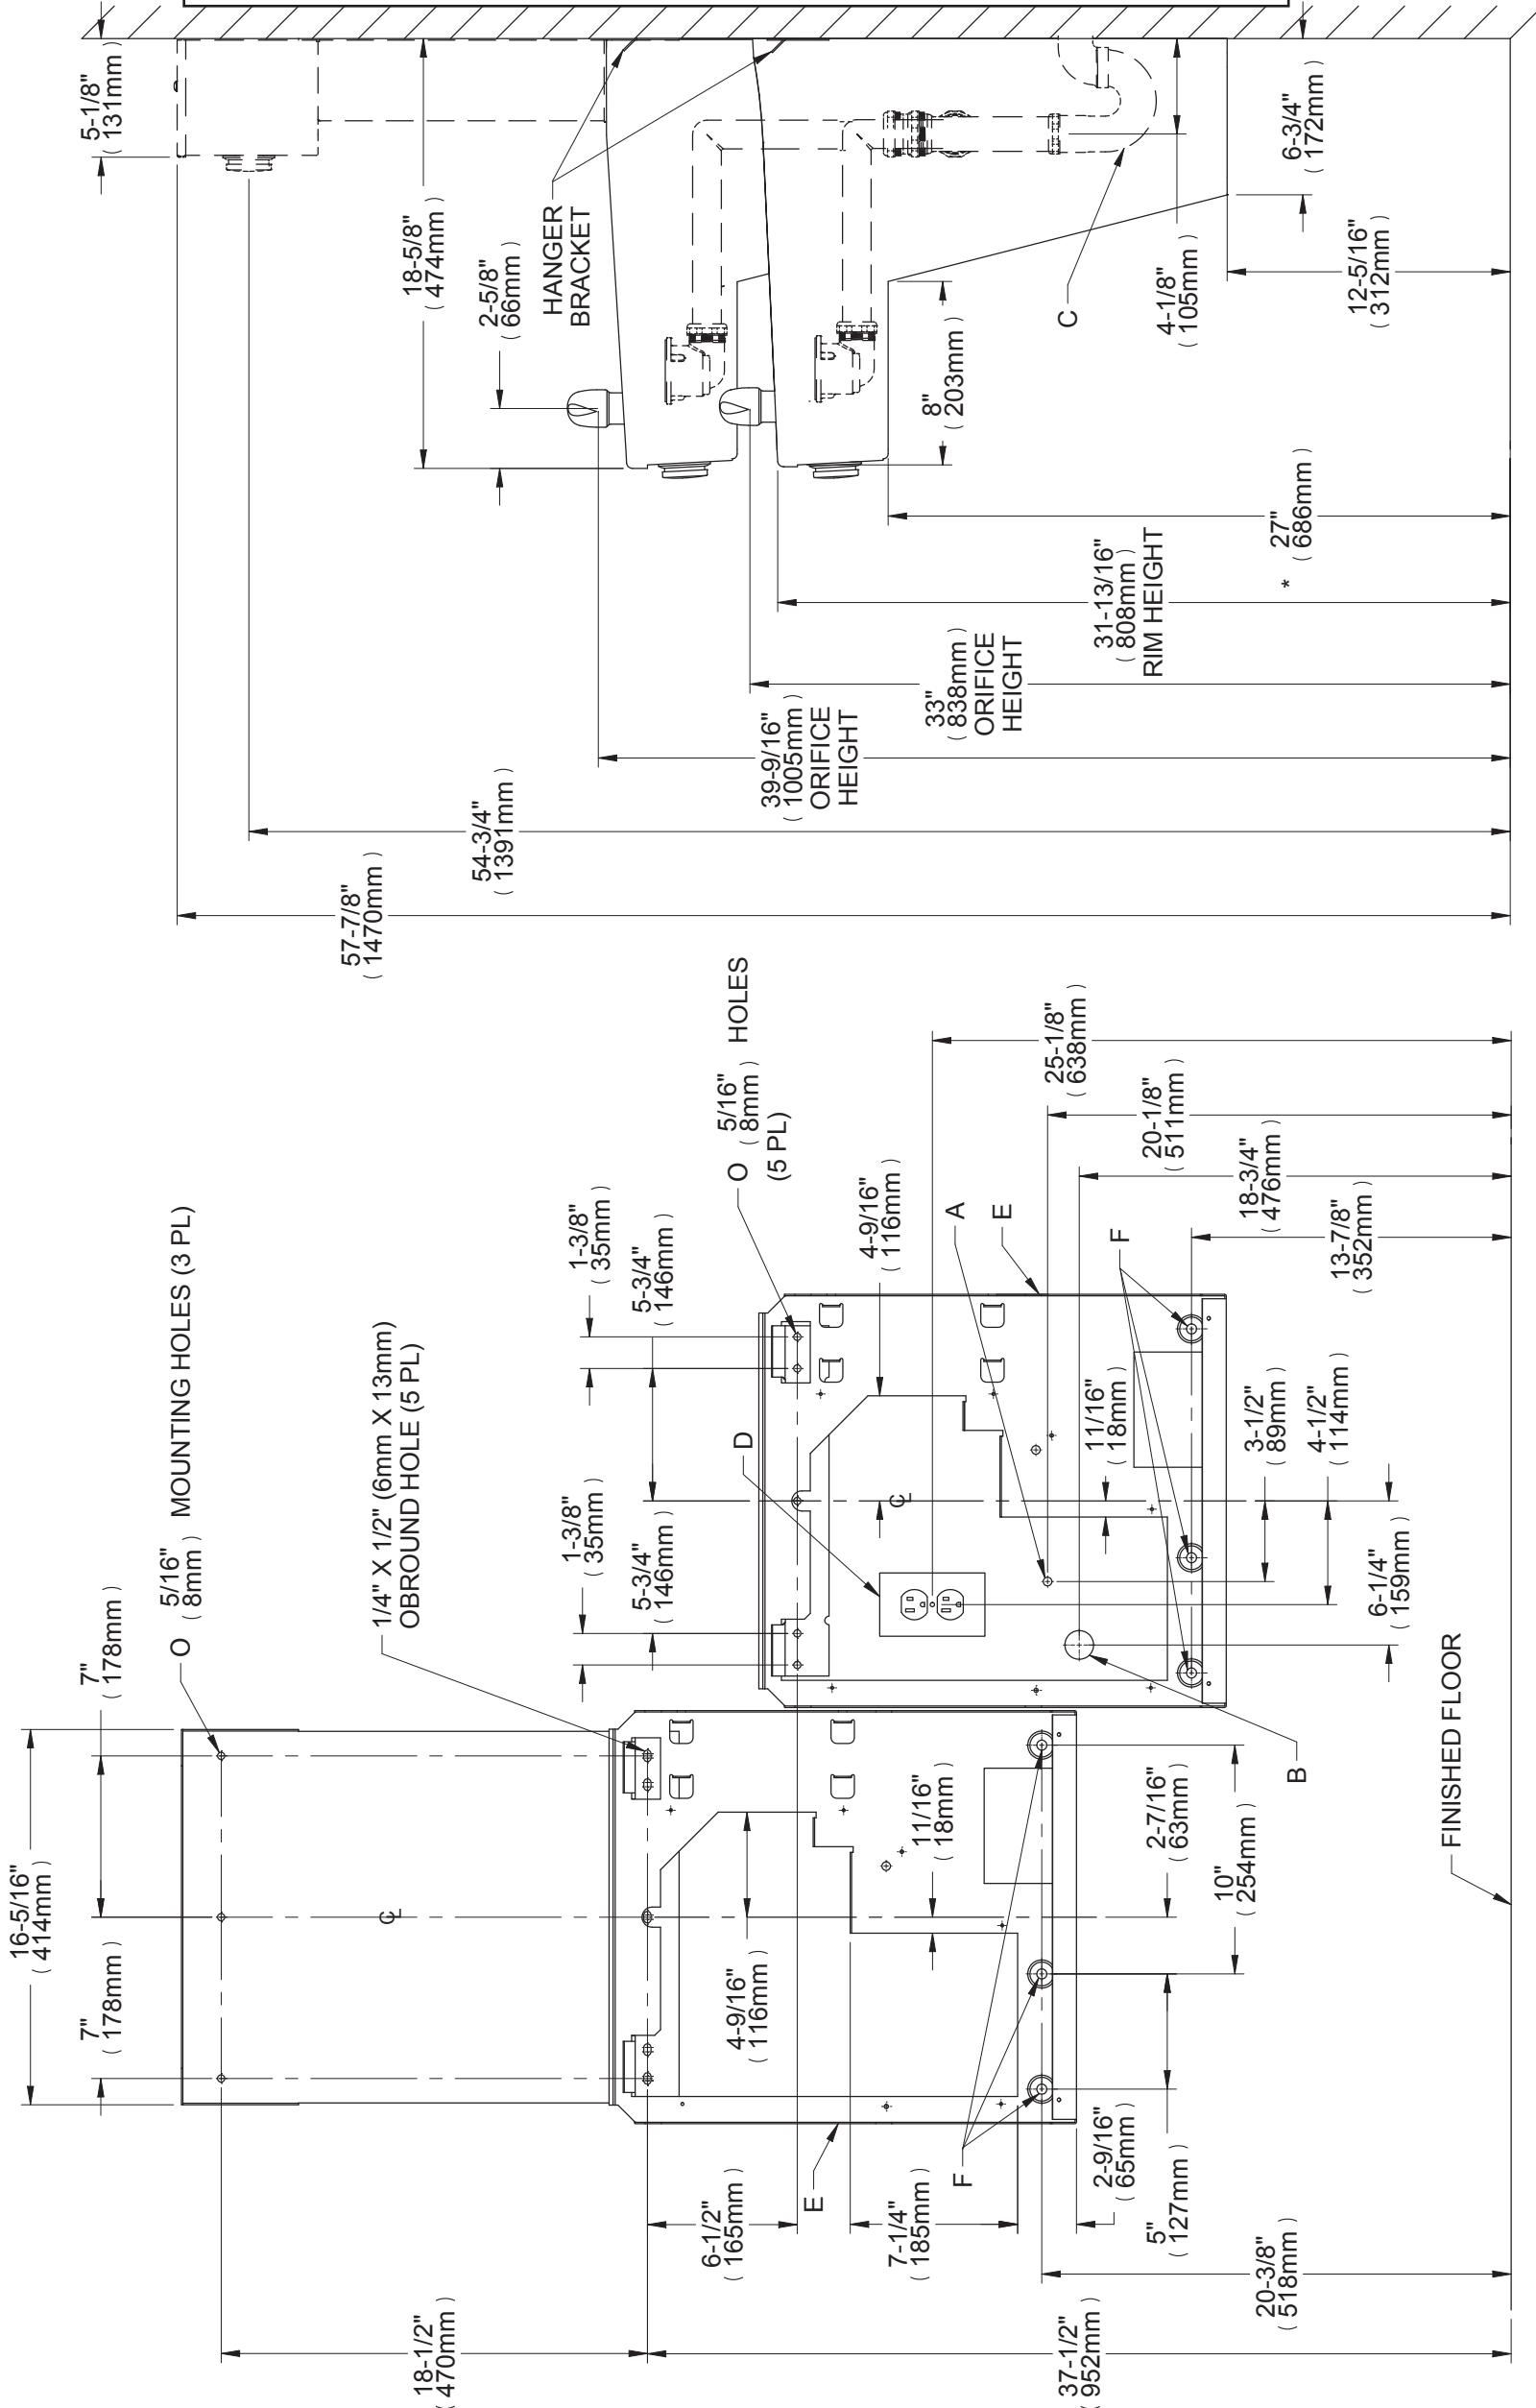

- LEGEND:**
- A = Recommended Water Supply Location. Shut-off Valve (not furnished) to accept 3/8" O.D. unplated copper tube.
 - B = 3" (76mm) maximum out from wall.
 - B = Recommended Waste Outlet Location. To accommodate 1-1/2" nominal drain.
 - C = 1-1/2" Trap (not furnished)
 - D = Electrical Supply (3) Wire Recessed Box Duplex Outlet
 - E = Insure proper ventilation by maintaining 6" (152mm) minimum clearance from cabinet louvers to wall.
 - F = 7/16" bolt holes for fastening unit to wall