



### □ GBFVR1909SC Vandal-Resistant Safety Station with WideArea™ Eye/Face Wash

**APPLICATION:** Combination WideArea™ eye/face wash and shower safety station with vandal-resistant construction. Ideal for use in schools and other areas where equipment may be subject to abuse.

**ADA COMPLIANCE:** Unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach, minimum knee clearance and distance from obstructions).

**SHOWER HEAD:** 8" diameter chrome plated cast brass shower head with 20 GPM flow control.

**SHOWER VALVE:** 1" IPS chrome plated brass self-closing ball valve with stainless steel actuating arm and 47 1/2" stainless steel pull rod.

**SPRAY HEAD ASSEMBLY:** Four vandal-resistant GS-Plus™ spray heads. Each head has a brass body, stainless steel "flip top" dust cover, internal flow control and filter to remove impurities from the water flow. Spray heads have retaining ring with set screw to protect internal components.

**EYE/FACE WASH BOWL:** 11 1/2" stainless steel.

**EYE/FACE WASH VALVE:** 1/2" IPS chrome plated brass stay-open ball valve with flag handle.

**PIPE AND FITTINGS:** Schedule 40 galvanized steel. Furnished with orange polyethylene covers on piping for high visibility and corrosion resistance.

**SUPPLY:** 1 1/4" NPT female top and side inlet.

**WASTE:** 1 1/4" NPT female outlet.

**SIGN:** ANSI-compliant identification sign.

**QUALITY ASSURANCE:** Valve, bowl and spray head assemblies are factory assembled and water tested prior to shipment.

**NOTE:** Safety stations with self-closing valves do not comply with the provisions of ANSI Z358.1 - 2004. However, they may be advantageous where there is a danger of unintended operation of the shower (as in schools) or where large volumes of water might damage surrounding equipment.


#### Available Options

- **APBF250-015 MODESTY CURTAIN**  
Modesty curtain for mounting on safety station.
- **AP275-200 ELECTRIC LIGHT AND ALARM HORN**  
Flashing light and alarm horn for mounting on safety station. Light is illuminated and horn sounds when either eyewash or shower is activated. Light/alarm unit is recommended as additional deterrent to vandalism and unauthorized activation of unit.
- **TMV G3800** thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2004.





### GBFVR1909SC Vandal-Resistant Safety Station with WideArea™ Eye/Face Wash

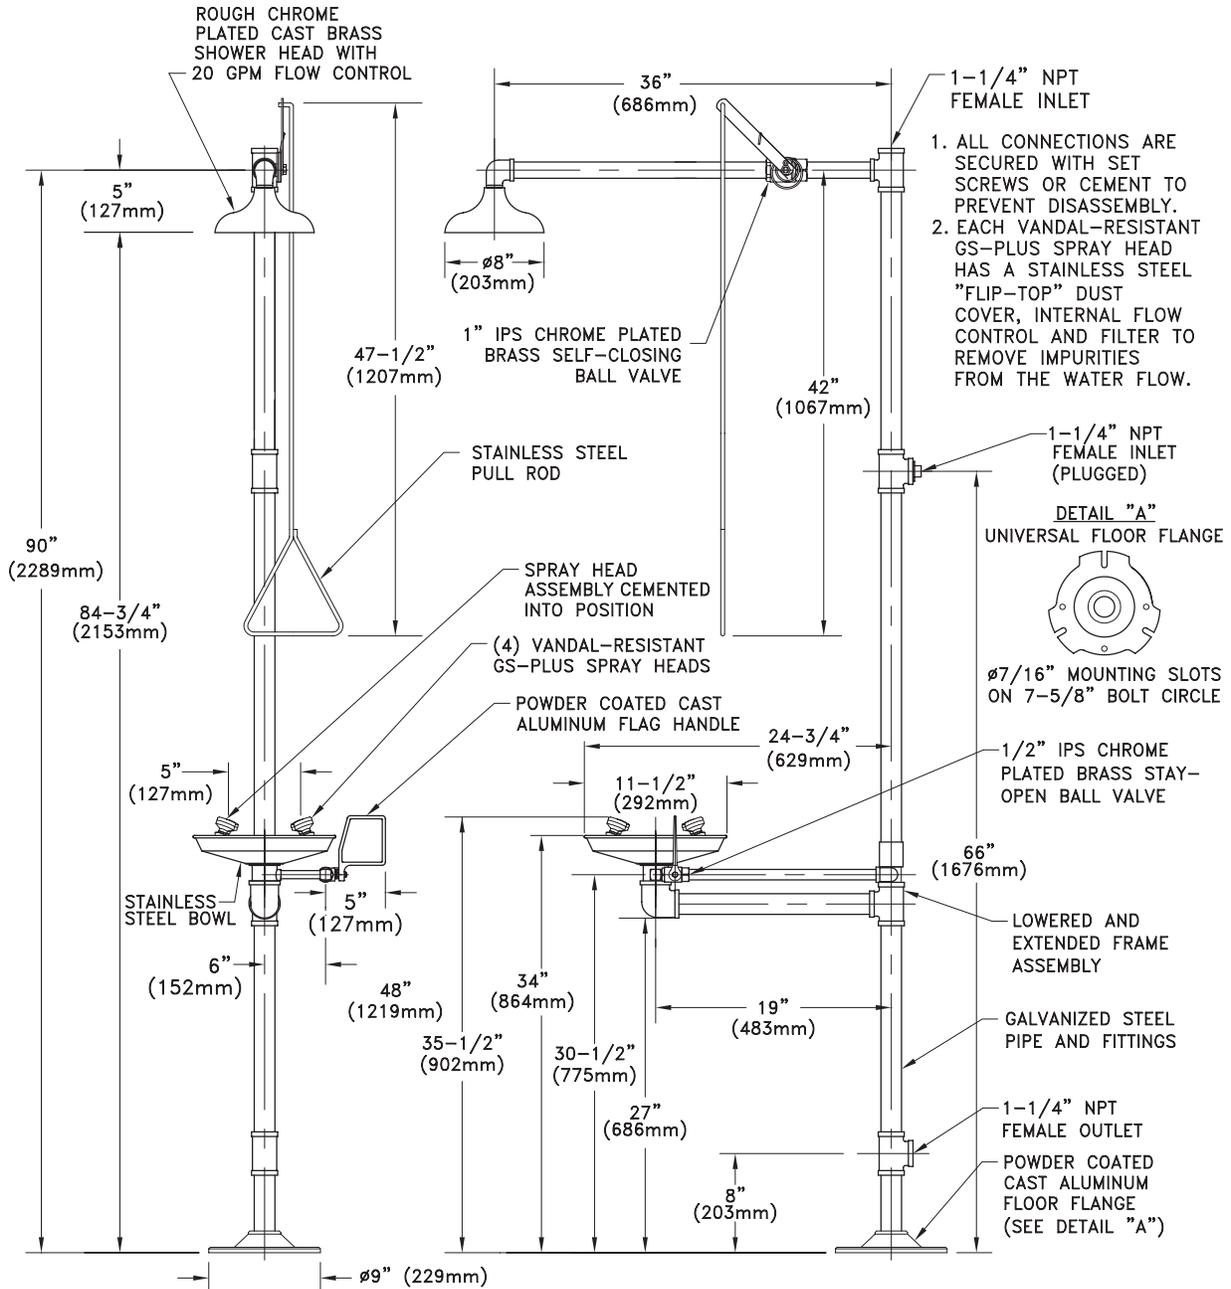

1. ALL CONNECTIONS ARE SECURED WITH SET SCREWS OR CEMENT TO PREVENT DISASSEMBLY.
2. EACH VANDAL-RESISTANT GS-PLUS SPRAY HEAD HAS A STAINLESS STEEL "FLIP-TOP" DUST COVER, INTERNAL FLOW CONTROL AND FILTER TO REMOVE IMPURITIES FROM THE WATER FLOW.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 0308

Sign Included

