Freeze-Resistant Units



GFR1909 Freeze-Resistant Safety Station with WideArea™ Eye/Face Wash, Plastic Shower Head
GFR1909SSH Freeze-Resistant Safety Station with WideArea™ Eye/Face Wash, Stainless Steel Shower Head

APPLICATION: Freeze-resistant combination WideArea[™] eye/face wash and shower safety station. Freeze-resistant valves and supply lines are buried below frost line to protect against freezing. Unit is designed to drain completely after use, so that no standing water remains in unit and possibility of freeze-up is eliminated. Since unit is intended for use in cold weather conditions, consideration should be given to supplying unit with tempered water in accordance with ANSI Z358.1-2004. See "Tempering Units" section for more information.

SHOWER HEAD: 10" diameter orange ABS plastic.

SHOWER VALVE: 1 1/4" IPS freeze-resistant valve with push plate. Valve body and supply line are buried below frost line to prevent freezing. Valve has 1/4" IPS bleed outlet to permit water standing in unit to drain out after use. Specify bury depth of valve when ordering.

SPRAY HEAD ASSEMBLY: Four GS-Plus[™] spray heads. Each head has a "flip top" dust cover and internal flow control.

EYE/FACE WASH BOWL: 11 1/2" diameter sainless steel.

EYE/FACE WASH VALVE: 3/4" IPS freeze-resistant valve with push plate. Valve body and supply line are buried below frost line to prevent freezing. Valve has 1/4" IPS bleed outlet to permit water standing in unit to drain out after use. Specify bury depth of valve when ordering.

PIPE AND FITTINGS: Schedule 40 galvanized steel. Furnished with orange polyethylene covers for vertical piping for high visibility and corrosion resistance.

SUPPLY: 3/4" NPT (eyewash valve) and 1 1/4" NPT (shower valve) male inlets.

WASTE: 1 1/4" NPT female outlet.

SIGN: Furnished with ANSI-compliant identification sign.

QUALITY ASSURANCE: Valve and spray head assemblies are factory assembled and water tested prior to shipment.

Available Options

FC20 Regulates shower flow rate to 20 GPM.

GRN Green ABS plastic shower head.

YEL Yellow ABS plastic shower head.


AP250-015 Modesty Curtain

Modesty curtain for mounting on safety station.





Guardian Equipment 1140 North Branch St. Chicago, IL 60622 312 447 8100 TELEPHONE 312 447 8101 FACSIMILE gesafety.com ETL Listed 101496. Units have been tested to and comply with ANSI Z358.1 - 2004 GFR1909SSH Freeze-Resistant Safety Station with WideArea™ Eye/Face Wash, Stainless Steel Shower Head

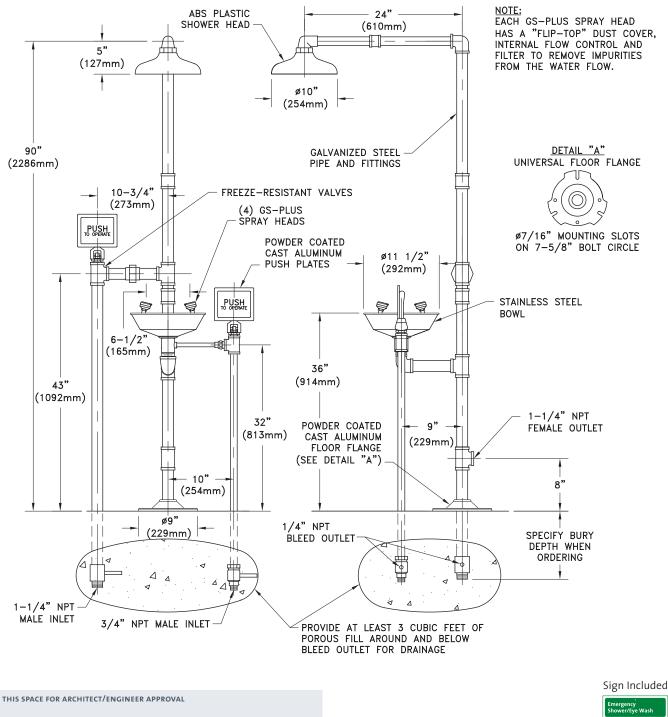



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4^{"}$ (6mm). rev. 0308

Guardian

Guardian Equipment 1140 North Branch St. Chicago, IL 60622 312 447 8100 TELEPHONE 312 447 8101 FACSIMILE gesafety.com ETL Listed 101496. Units have been tested to and comply with ANSI Z358.1 - 2004

