SPEAKMAN®

SE-607

SAFE-T-ZONE® EMERGENCY SHOWER AND EYE/FACE WASH DESCRIPTION

The SE-607 Safe-T-Zone® features a floor mounted emergency deluge shower and aerated eye/face wash combination unit. Shower is supplied with a 1" NPTF stay-open full flow ball valve, activated by triangular pull handle. Eye/face wash is supplied with ½" NPTF stay-open full flow ball valve, activated by push handle and/or foot pedal.

SPECIFICATIONS

Showerhead: 8" Cycolac® yellow plastic Flow Control: Internal 20 gpm regulator Valve: 1" NPT female brass, chrome plated.

Full flow stay open ball valve. **Activator**: Stainless steel tube

Stanchion: 11/4" IPS steel piping with brass fittings

Inlet & Waste: 11/4" NPT female

Floor & Flange: Brass casting with (3) 17/32"

dia. mounting holes on 9" dia. bolt circle, spaced 120° apart

Finish: Dura JadeTM

Performance: 20 gpm @ 20 psi flowing

EYE/FACE WASH: SE-400

Bowl: 300 series stainless steel or yellow ABS plastic **Spray Heads**: (6) brass, chrome-plated aerated

Valve: 1/2" NPT female brass, chrome-plated.

Activator: Stainless steel push handle. **Shrouds**: Yellow polypropylene.


Inlet: 1/2" NPT female.

Strainer: Brass, chrome-plated, in-line. Performance: 9.6 gpm @ 30 psi Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

⅃ XPR	Extended pull rod
☐ FLW	Flow switch
☐HS	Hand-held spray
☐ PC	Polished chrome showerhead
□ BH	Brass showerhead
☐ SSH	Stainless steel shower hand
☐ FPV	Freeze protection valve
☐ SSBV1	1" stainless steel valve
☐ SSBV2	1/2" stainless steel valve
☐ TS	Top supply
\square SPV	Scald protection valve

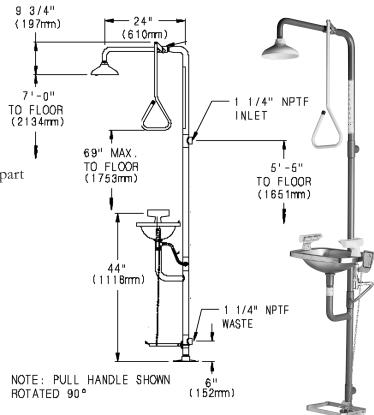

Job Name	
Location	
Architect/Engineer	
Sales Representative	
Wholesaler	
Date Model #	