

ORIGINS®

Two Handle Lavatory Faucet


- S-243-2-G-LAM-1.5: With grid strainer drain assembly
- S-243-2-LAM-1.5: With lift rod and pop-up drain assembly
- S-243-1-LAM-1.5: With lift rod only
- S-243-0-LAM-1.5: Faucet only (no lift rod hole)
- S-243-LAM-1.5: Faucet only

Origins Two Handle Widespread Lavatory Faucet with quarter turn ceramic control components, metal finish insert lever handles, lift-rod and pop-up drain assembly. Aerator, 1/2" IPS shanks, 8" to 16" centers, metal construction, polished chrome finish.

Modifications:

Add:

- Suffix LPO: White insert lever handles
- Suffix LCF: Clear faceted insert lever handles
- Suffix 0.5: 0.5 gpm flow restrictor spray outlet (vandal resistant)
- Suffix VP: Vandal resistant aerator
- Suffix OFG: Offset grid strainer
- Suffix STN: Satin Nickel finish

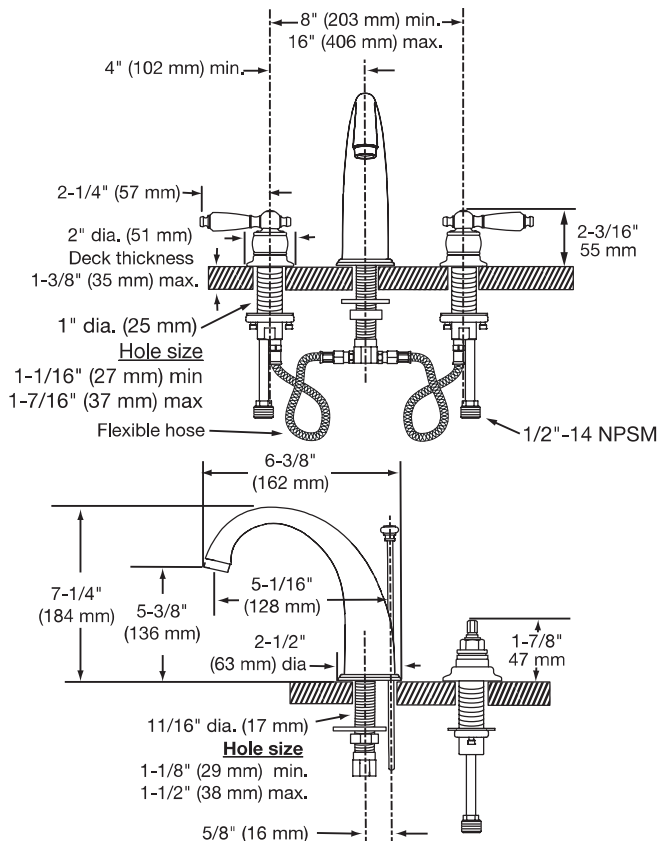

Compliance:

- ASME A112.18.1/CSA B125.1
- ANSI/NSF 61.9, ANSI/NSF 372
- WaterSense @ 1.0 gpm & 1.5 gpm



Job/Location

.....

.....

Engineer

.....

.....

Contractor

.....

.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 Phone: (800) 796-6667 ■ Fax: (800) 961-9621
 Website: symmons.com ■ Email: gethelp@symmons.com

Copyright © 2019 Symmons Industries, Inc. ■ ZV-1270 REV E ■ 123119

SYMMONS®
 the smart choice™