

FISHER

FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238
customer@fisher-mfg.com - www.fisher-mfg.com

PRODUCT NAME:

REEL SS EXP 35 SV

SPEC. RRCHIEU-XX

Customer/Wholesaler:

Date:


Job Name:

Model Specified:


Quantity:

Contractor:

Architect/Engineer:

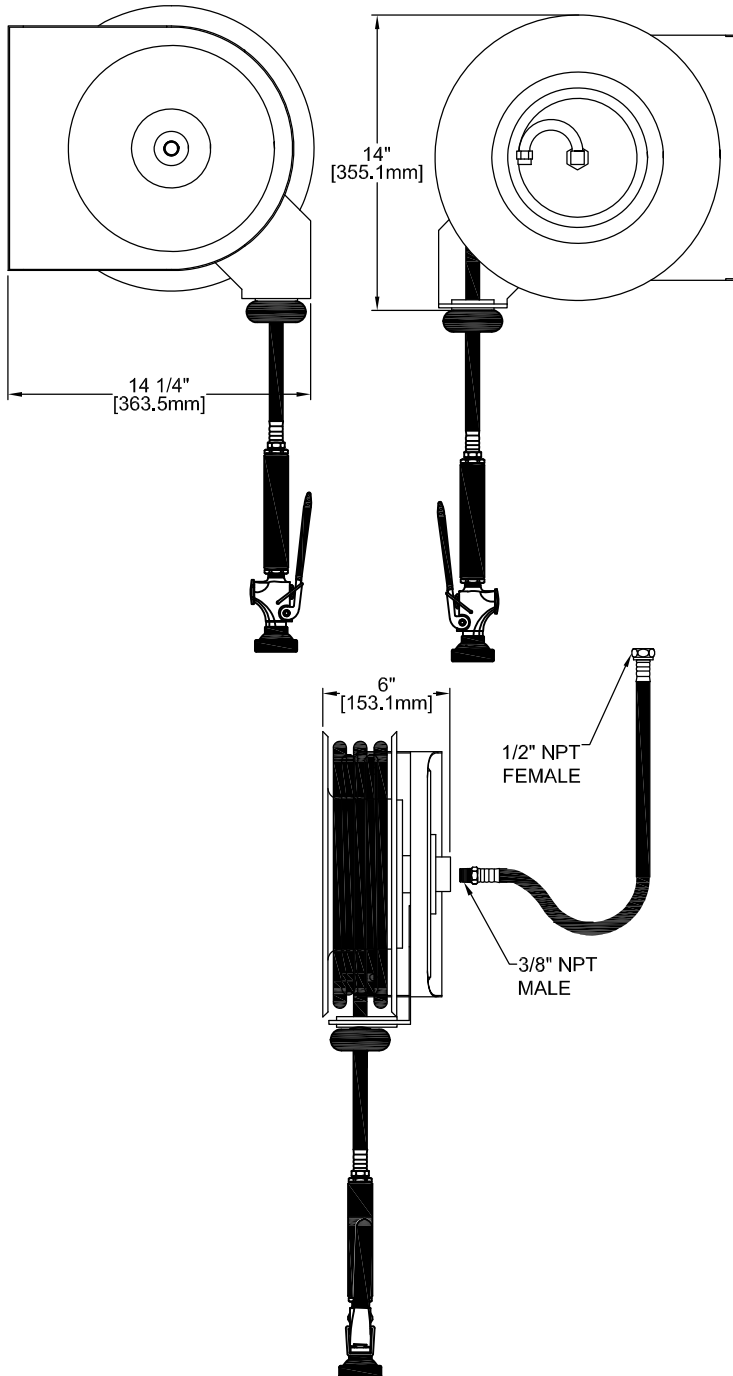

ROUGH-IN: SEE MOUNTING PLATE BELOW

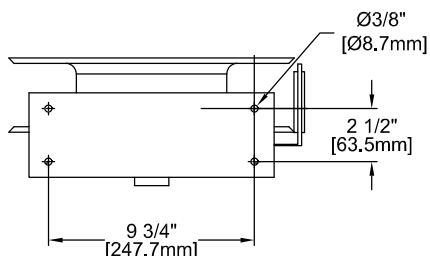

MODEL:

☐ 75394 REEL EXP 35 SV WITH PRO SPRAY VALVE

OPTIONS OR MODIFICATIONS:

☐ OTHER _____

FEATURES

REEL

- * SELF-LOCKING
- * EXPOSED HOSE
- * 35' LENGTH REEL HOSE
- * 18" LENGTH INLET HOSE
- * 3 PLY FIBER REINFORCED RUBBER HOSE
- * ADJUSTABLE BALL STOP

PRO SPRAY VALVE

- * NOZZLE THREADED INTO VALVE
- * 2.65 GPM AT 80 PSI
- * SHOWER SPRAY PATTERN

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 160°F MAX.
- * PRESSURE: 200 PSI MAX. STATIC

SHIPPING WEIGHT

- * 34.0 LBS
- *

Drawn: DF

Checked: EM

Approved: DF

Date: 12/03/20

Sheet: 1 of 2



FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238
customer@fisher-mfg.com - www.fisher-mfg.com

PRODUCT NAME:

REEL SS EXP 50 SV

SPEC. RRCHEU-XX

Customer/Wholesaler:

Date:


Job Name:

Model Specified:

Quantity:

Contractor:

Architect/Engineer:

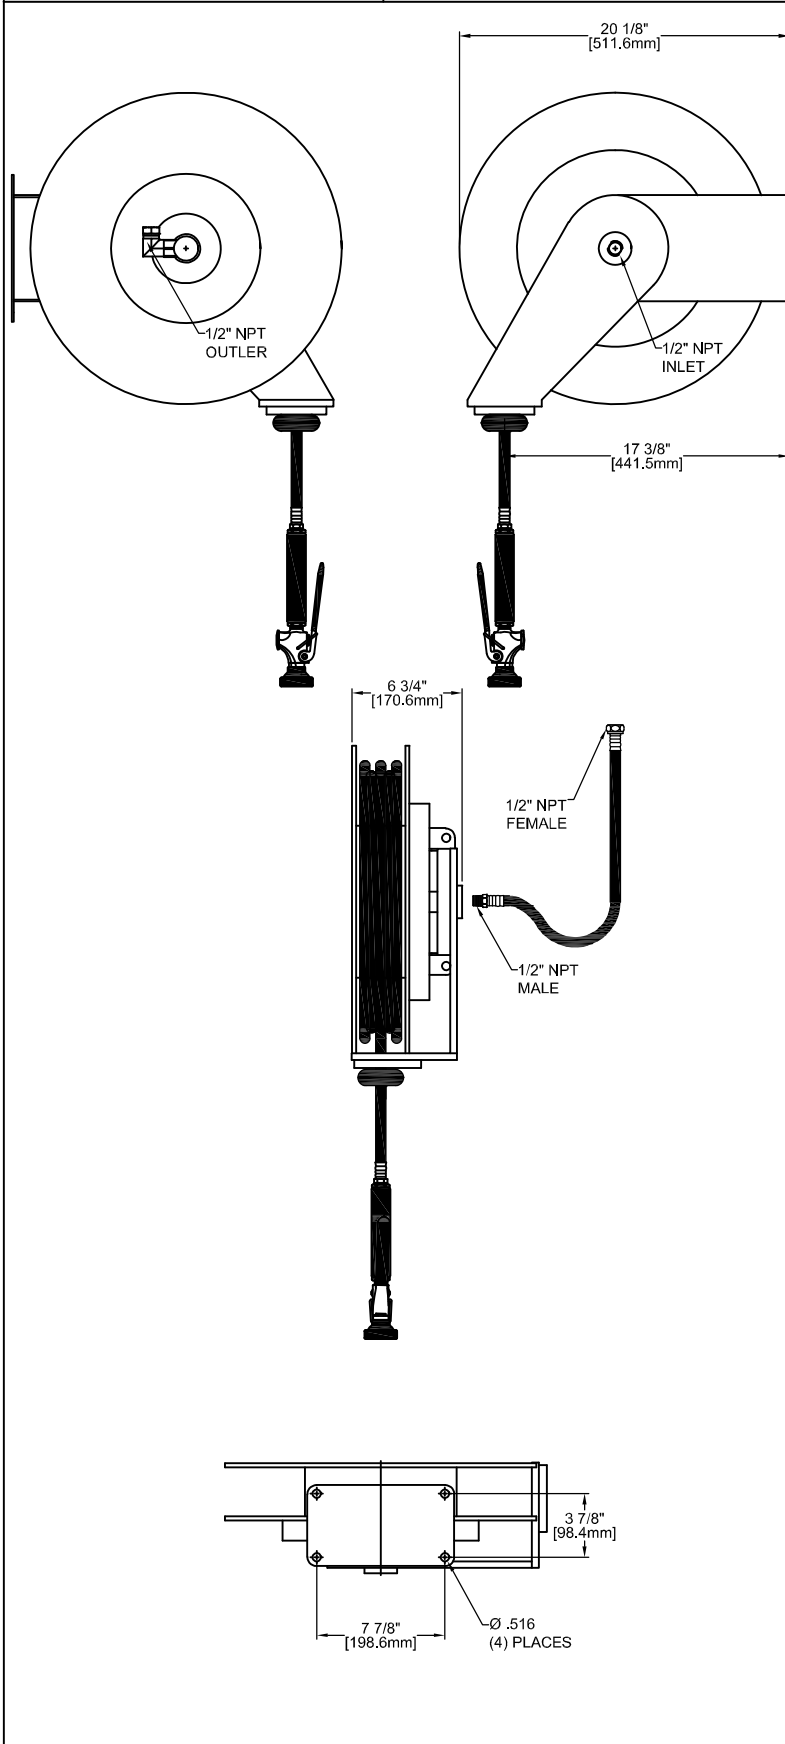

MODEL:

☐ 75395 REEL EXP 50 SV WITH PRO SPRAY VALVE

OPTIONS OR MODIFICATIONS:

☐ OTHER _____

FEATURES

REEL

- * SELF-LOCKING
- * EXPOSED HOSE
- * 50' LENGTH REEL HOSE
- * 24" LENGTH INLET HOSE
- * 3 PLY FIBER REINFORCED RUBBER HOSE
- * ADJUSTABLE BALL STOP

PRO SPRAY VALVE

- * NOZZLE THREADED INTO VALVE
- * 2.65 GPM AT 80 PSI
- * SHOWER SPRAY PATTERN

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 160°F MAX.
- * PRESSURE: 200 PSI MAX. STATIC

SHIPPING WEIGHT

- * 52.0 LBS

Drawn: DF

Checked: EM

Approved: DF

Date: 12/03/20

Sheet: 2 of 2