

CHICAGO FAUCETS

a Geberit company



2100 SOUTH CLEARWATER DRIVE
DES PLAINES, ILLINOIS 60018-5999

FITTING NO.

9004-RH

SUBMITTED MODEL NO.

JOB NAME

ITEM NO.

SUBMITTED AS SHOWN


SUBMITTED AS NOTED

SEE ATTACHED FOR
SUBMITTED MODIFICATION

NOTE: THIS UNIT HAS RIGHT-HAND CONSTRUCTION.
DESIGNED FOR MOUNTING ON RIGHT-HAND SIDE OF SINK.

IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA.

ROUGHING IN DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE. NO RESPONSIBILITY

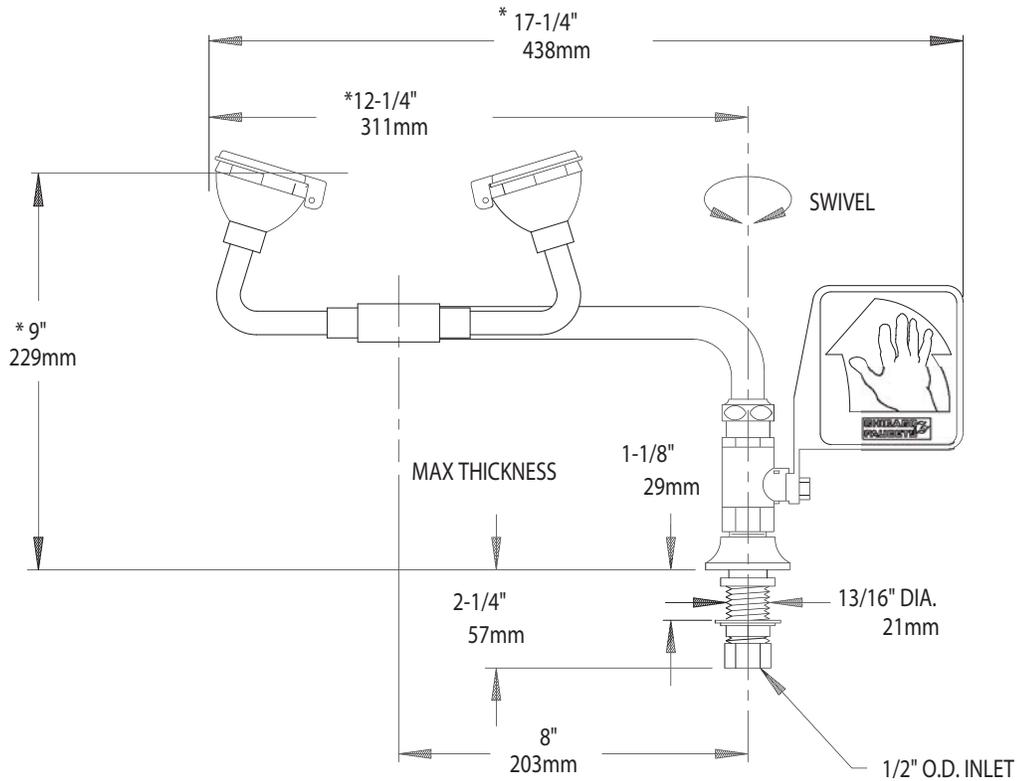

* THESE DIMENSIONS MAY VARY PLUS OR

MINUS 1/2" (12.7mm)

NOTE: THE ANSI STANDARD SPECIFIES EY
HEIGHTS TO BE 33" (838mm) TO 4
ABOVE THE FLOOR. CENTERLINE O
MUST BE 6" (152mm) MINIMUM AWA

EWASH NOZZLE
5" (1143mm)
F EYEWASH HEADS
Y FROM WALL.

DIMENSIONS IN INCHES AND [MILLIMETERS].

TECHNICAL DATA

- RIGHT HAND DECK MOUNTED SWING EYE/FACE WASH
- DUAL HIGH IMPACT ABS PLASTIC SPRAY HEADS IN HIGH VISIBILITY YELLOW
- INTEGRAL DUST COVERS FOR SPRAY HEADS THAT RELEASE WHEN VALVE IS ACTIVATED
- PUSH-TO-ACTIVATE BALL VALVE THAT STAYS OPEN UNTIL MANUALLY CLOSED
- HIGH VISIBILITY EMERGENCY SIGN (NOT SHOWN)
- MEETS ANSI STANDARD Z358.1
- FINISH: NO FINISH

DATE: 4-12-02

BY: JAR

CHK'D:

APP'D:

REV: A

9004-RH