

# SPEAKMAN®

## SE-697

### COMBINATION SHOWER & EYEWASH

#### DESCRIPTION

The SE-697 Safe-T-Zone® features the SE-580 eyewash with dual aerated spray outlets, flip-top dust covers and stainless steel bowl combined on a powder coated galvanized steel stanchion with an impeller action deluge showerhead which is activated by a high visibility yellow pull rod.

#### SPECIFICATIONS

**Showerhead:** 8" Cyclac® yellow plastic

**Flow Control:** Internal 20 gpm regulator

**Valve:** 1" NPT female brass, chrome-plated. Full flow stay open ball valve

**Activator:** Powder coated yellow, aluminum triangular pull rod

**Stanchion:** 1 1/4" IPS galvanized steel piping with brass fittings

**Inlet & Waste:** 1 1/4" NPT female

**Finish:** DuraJade™ powder coated finish

**Performance:** 20 gpm @ 20 psi

**EYEWASH: SE-580**

**Bowl:** Yellow ABS plastic

**Spray Heads:** (2) aerated yellow ABS plastic spray outlets with flip-top dust caps

**Valve:** 1/2" NPT female brass, chrome-plated full flow stay open ball valve

**Activator:** Stainless steel push handle


**Performance:** 3.8 gpm @ 30 psi

**Compliance:** ANSI Z358.1

**Universal Emergency Sign Included**

#### OPTIONS

- BH Brass showerhead
- FLW Flow switch
- FPV Freeze protection valve
- HFO Hand/Foot operation
- HS Hand-held spray
- PSS Polished stainless steel finish
- SCV Self-closing shower valve
- SPR Stainless steel pull rod
- SPV Scald protection valve
- SSBV Stainless steel ball valve
- SSH Stainless steel showerhead
- TS Top supply
- XPR Extended aluminum pull rod

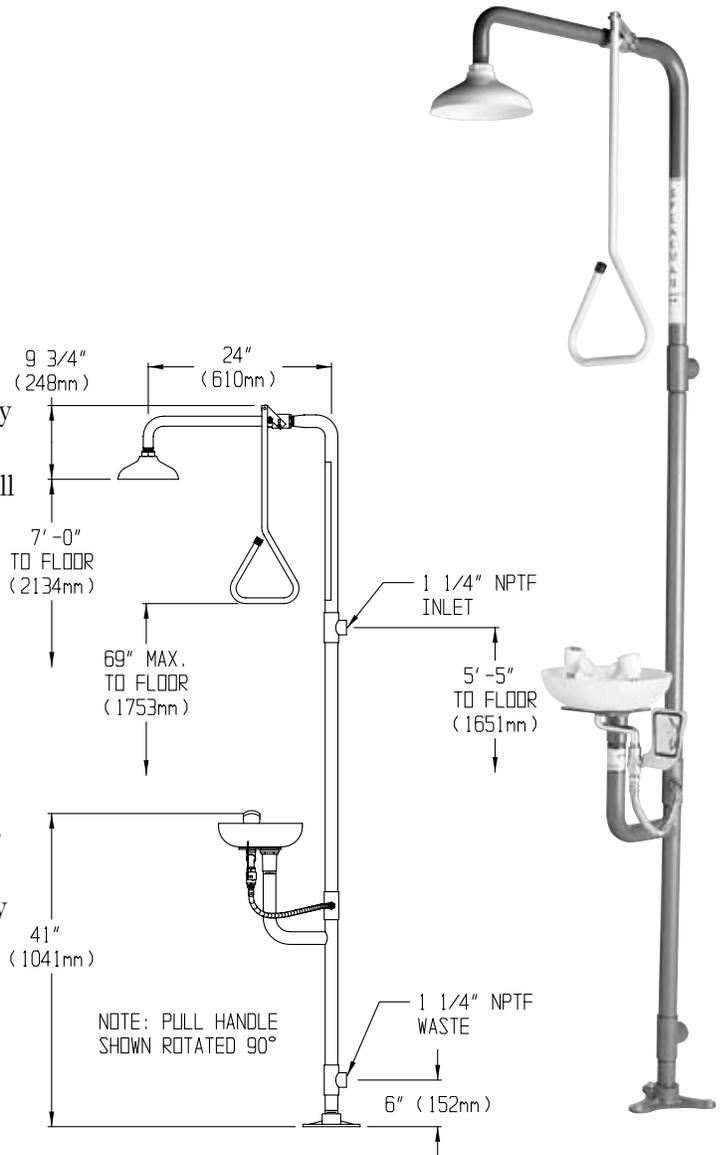

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____