

SPEAKMAN®

SE-675

COMBINATION SHOWER AND EYE/FACE WASH

DESCRIPTION

SE-675 Safe-T-Zone® features an eye/face wash with dual spray outlets, flip top dust caps combined on a powder coated galvanized steel stanchion with an impeller action deluge showerhead that is activated by a high visibility yellow pull rod.

SPECIFICATIONS

Showerhead: 8" Cylolac® yellow plastic

Flow Control: Internal 20 gpm restrictor

Valve: 1" NPT female brass, chrome-plated, full flow stay-open ball valve

Activator: Powder coated yellow, aluminum triangular pull rod

Stanchion: 1¼" IPS galvanized steel piping with brass fittings

Inlet: 1¼" NPT female

Finish: Dura Jade powder coated finish

Performance: 20 gpm @ 20 psi

EYE/FACE WASH: SE-575

Spray Heads: (2) yellow ABS plastic spray outlets with flip-top dust caps

Valve: ½" NPT female brass, chrome-plated, full flow stay-open ball valve

Activator: Stainless steel push handle

Inlet: ½" NPT male


Performance: 3.8 gpm @ 30 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- HFO Hand & foot operation
- FPV Anti-freeze protection valve
- SPV Anti-scald protection valve
- FLW Flow switch
- HS Hand-held spray
- TS Top supply
- SSH Stainless steel showerhead
- SPR Stainless steel pull rod
- SSBV Stainless steel ball valves
- BH Brass showerhead

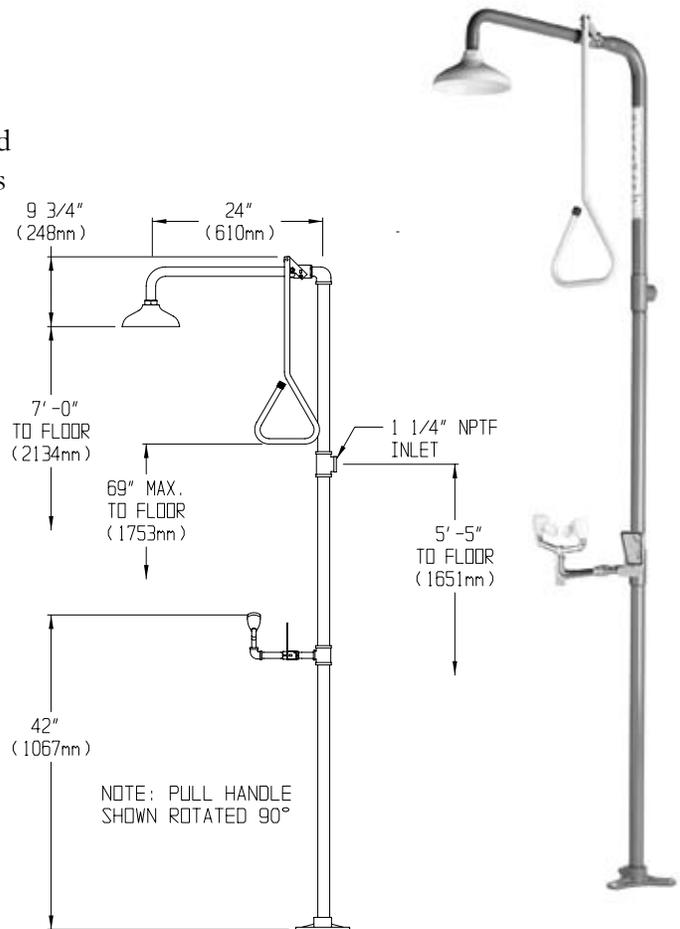

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____