

- Complies with American National Standard Z358.1-2004
- Galvanized Steel Protected with BRADTECT™ Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending



Specifications

This unit is made specifically for areas subject to freezing. Compact drench shower fits easily into any work environment. Shower valve operates quickly by a stainless steel push flag handle. Shower provides a superior washdown with a more even spray pattern.


cUPC Approved:

S19-120HFP is certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Standard Equipment

SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic for high visibility in emergency situations. SpinTec drench showerhead features integral 23 GPM flow control, conserving water and helping to accurately size your tepid water system.

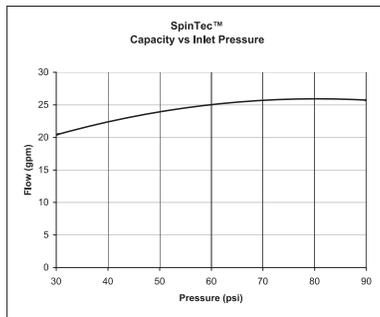

Frost-Proof Shower Valve


Chrome-plated brass 1" NPT stay-open valve. Hand operated by a stainless steel push handle. Standard depth 36" (914mm). Special order for other bury depths (18"-48"-60"-72"). Note: Special order depths are non-returnable.

Pipe and Fittings

1-1/4" galvanized steel with BRADTECT™ safety yellow coating. Standard wall thickness is 8"-12". Special order for other wall thicknesses. (0"-8" or 12"-18").

Water Supply

1-1/4" NPT.

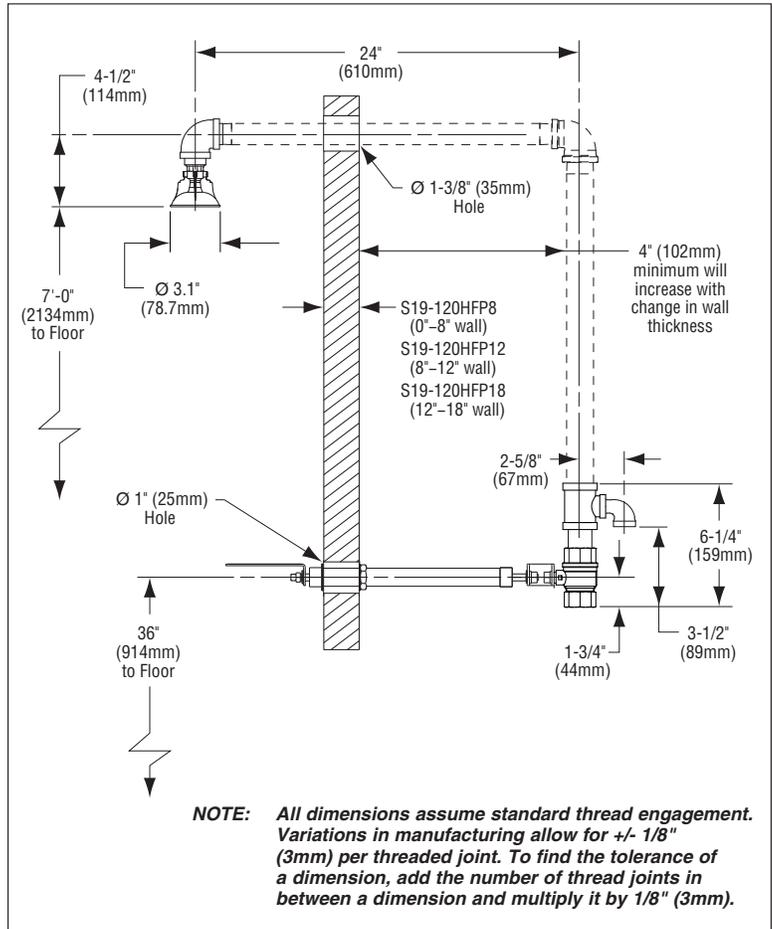

Model	Description
<input type="checkbox"/> S19-120HFP	Frost-Proof Wall-Mounted Drench Shower
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve

Recommended Option:
 Navigator S19-2100 EFX25
 Emergency Thermostatic Mixing Valve

NAVIGATOR

Satisfies ANSI Z358.1-2004 tepid water requirements.