

- Complies with American National Standard Z358.1-2004
- Bright Mirror Finish
- Chrome-Plated Red Brass Pipe and Fittings
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending



## Specifications

Impact-resistant plastic showerhead with corrosion-resistant stainless steel shroud. Bright mirror finish is superior for laboratory use where appearance is important. Shower pull rod is stainless steel. Pipe and fittings are chrome-plated red brass. Shower provides a superior washdown with a more even spray pattern.

- Drench shower is designed to accommodate standard 8' ceiling height. ANSI Z358.1 compliant drench showers are mounted between 82"-96" from the lower edge of the showerhead or shroud to the floor.


### cUPC Approved:

S19-120T is certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

## Standard Equipment

### SpinTec™ Showerhead

3.1" (78.7mm) diameter yellow impact-resistant plastic; includes 10-3/4" (273mm) diameter corrosion-resistant stainless steel shroud. SpinTec drench showerhead features integral 23 GPM flow control, conserving water and helping to accurately size your tepid water system.

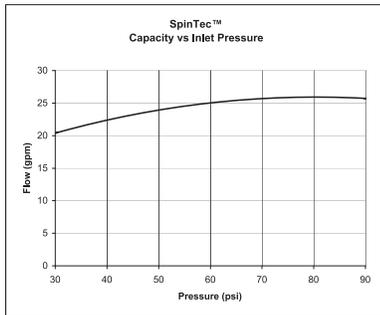

### Valve


Chrome-plated brass 1" NPT stay-open valve. Operated by a stainless steel pull rod with triangular handle.

### Pipe and Fittings

Chrome-plated red brass.

### Water Supply

1" NPT Horizontal.

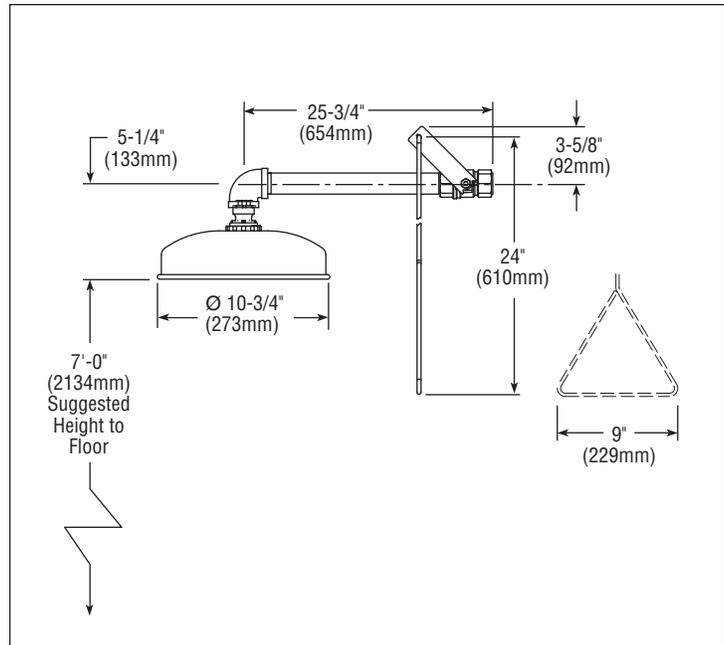

## Recommended Option:

Navigator S19-2100 EFX25  
Emergency Thermostatic Mixing Valve

**NAVIGATOR**



Satisfies ANSI Z358.1-2004  
tepid water requirements.

Model	Description
<input type="checkbox"/> S19-120T	Chrome-Plated Brass Drench Shower w/Horizontal Supply
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve