

- Complies with American National Standard Z358.1-2004
- Easily Mounts in Open Area
- Galvanized Steel Protected with BRADTECT™ Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending

## Specifications

Impact-resistant plastic shower head is colored bright yellow for high visibility in emergency situations. Also available in corrosion resistant stainless steel. Shower pull rod is stainless steel. Galvanized steel piping is additionally protected with BRADTECT™ safety yellow coating. Model S19-130SS is all stainless steel construction.

- Drench shower is designed to accommodate standard 8' ceiling height. ANSI Z358.1 compliant drench showers are mounted between 82"-96" from the lower edge of the showerhead or shroud to the floor.


### cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

## Standard Equipment

### SpinTec™ Showerhead

Standard showerhead is 3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic (Model S19-130A includes a 10-3/4" [273mm] diameter corrosion-resistant stainless steel shroud). High performance corrosion-resistant stainless steel showerhead with hexagonal profile stainless steel showerhead with hexagonal profile measures 1-9/16" (40mm) point-to-point (Model S19-130SS only). SpinTec drench showerhead features integral 23 GPM flow control, conserving water and helping to accurately size your tepid water system.

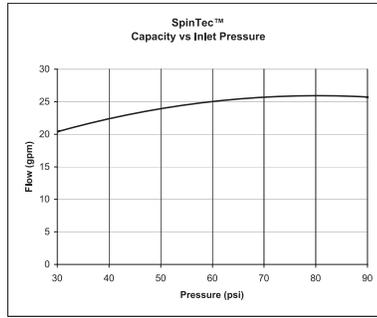

### Valve

Chrome-plated brass 1" NPT stay-open ball valve, operated by stainless steel pull rod with triangular handle. Model S19-130SS is all stainless steel.

### Pipe and Fittings

Galvanized steel with BRADTECT™ safety yellow coating. S19-130SS is all stainless steel.


### Water Supply

1" NPT Vertical.


### Recommended Option:

Navigator S19-2100 EFX25  
Emergency Thermostatic Mixing Valve




**NAVIGATOR**



Satisfies ANSI Z358.1-2004  
tepid water requirements.

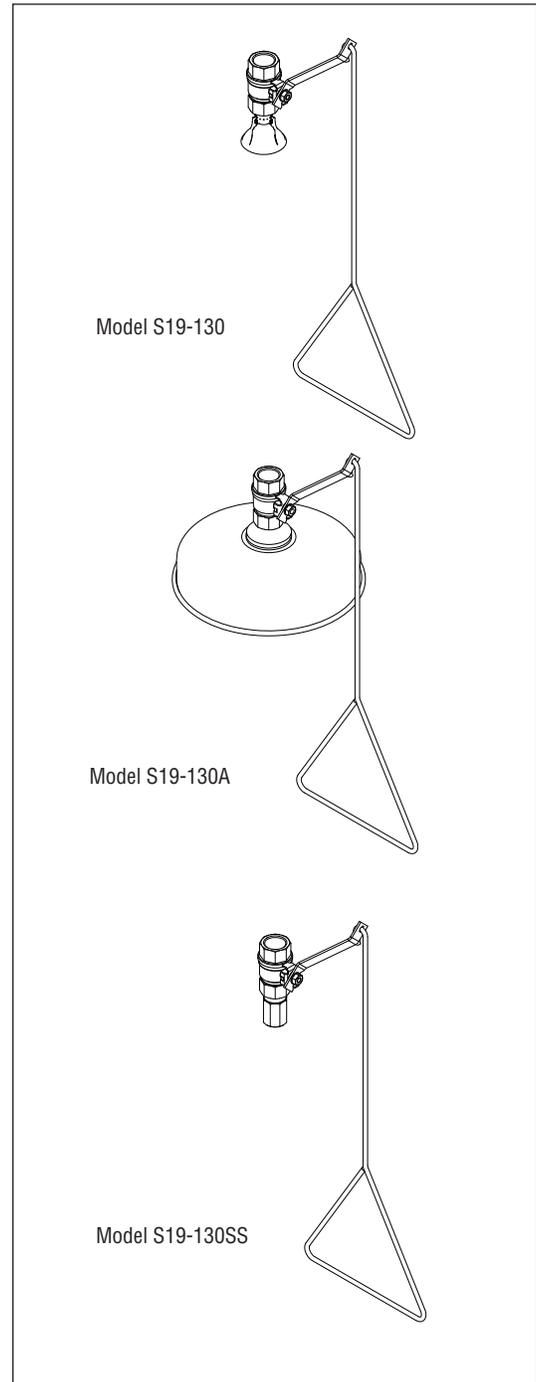

Model	Description
<input type="checkbox"/> S19-130	Drench Shower w/Vertical Supply - Plastic Showerhead
<input type="checkbox"/> S19-130A	Drench Shower w/Vertical Supply - Plastic Showerhead with Stainless Steel Shroud
<input type="checkbox"/> S19-130SS	Drench Shower w/Vertical Supply - All-Stainless Steel Fixture
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve

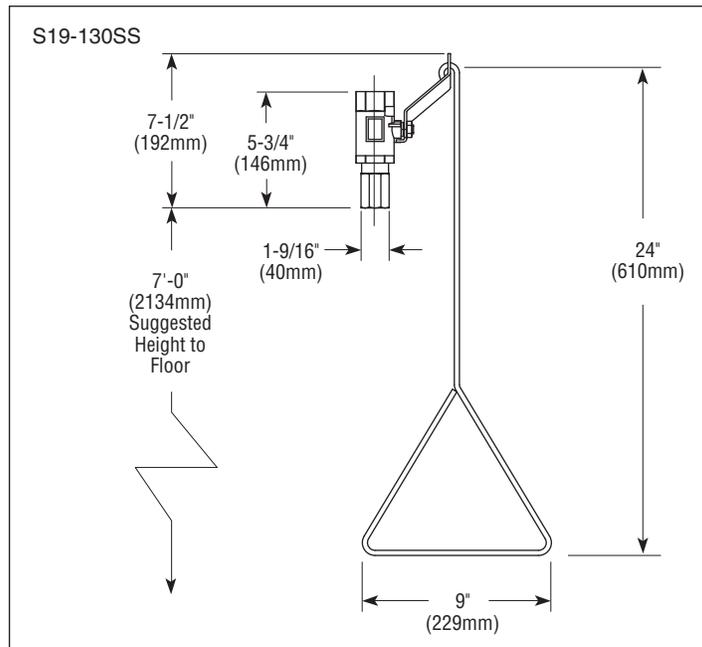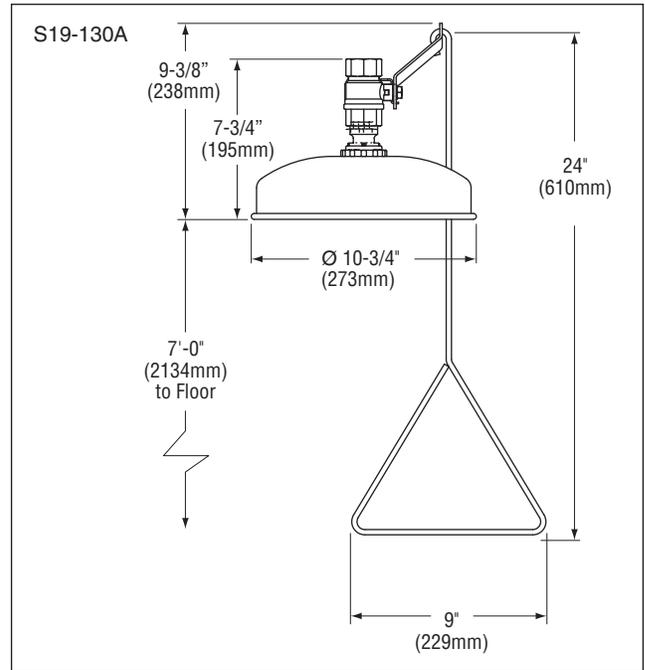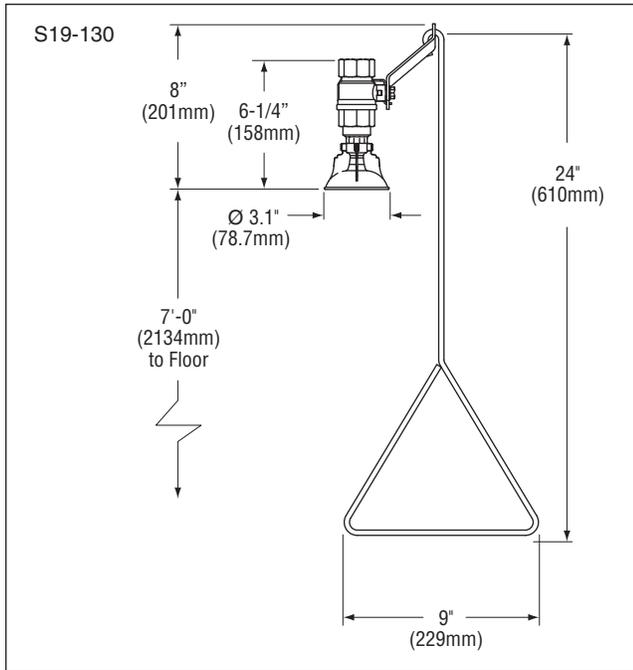

NOTE: All dimensions assume standard thread engagement. Variations in manufacturing allow for +/- 1/8" (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by 1/8" (3mm).