

- Galvanized Steel Protected with BRADTECT™ Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending



Specifications

This unit is most often used with over-the-door installations which orient blinded or panic-stricken accident victims to the location of the shower. Installed with 7' (2134mm) nylon cord, pulley, and wall bracket. Impact-resistant plastic showerhead is colored bright yellow for high visibility in emergency situations. Shower provides a superior washdown with a more even spray pattern. Galvanized steel piping is additionally protected with BRADTECT™ safety yellow coating.

- SELF-CLOSING SHOWER VALVE SPRING ADAPTER S19-001V:** This adapter does not comply with ANSI Z358.1-1998, 4.2 which states: "The valve shall be designed so that the water flow remains on without requiring the use of the operator's hands. The valve shall be designed to remain activated until intentionally shut off."
- Drench shower is designed to accommodate standard 8' ceiling height. ANSI Z358.1 compliant drench showers are mounted between 82"-96" from the lower edge of the showerhead or shroud to the floor.


cUPC Approved:

Model S19-120G is certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Standard Equipment

SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic. SpinTec drench showerhead features integral 23 GPM flow control, conserving water and helping to accurately size your tepid water system.

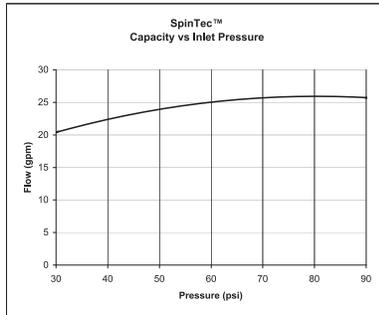

Shower Valve

Chrome-plated brass 1" NPT stay-open ball valve. Operated by a 7' (2134mm) nylon cord with pulley and wall bracket. Valve is self-closing.

Pipe and Fittings

Concealed galvanized steel with BRADTECT™ safety yellow coating.


Water Supply

1-1/4" NPT vertical.


Recommended Option:

Navigator S19-2100 EFX25
Emergency Thermostatic Mixing Valve

NAVIGATOR



Satisfies ANSI Z358.1-2004
tepid water requirements.

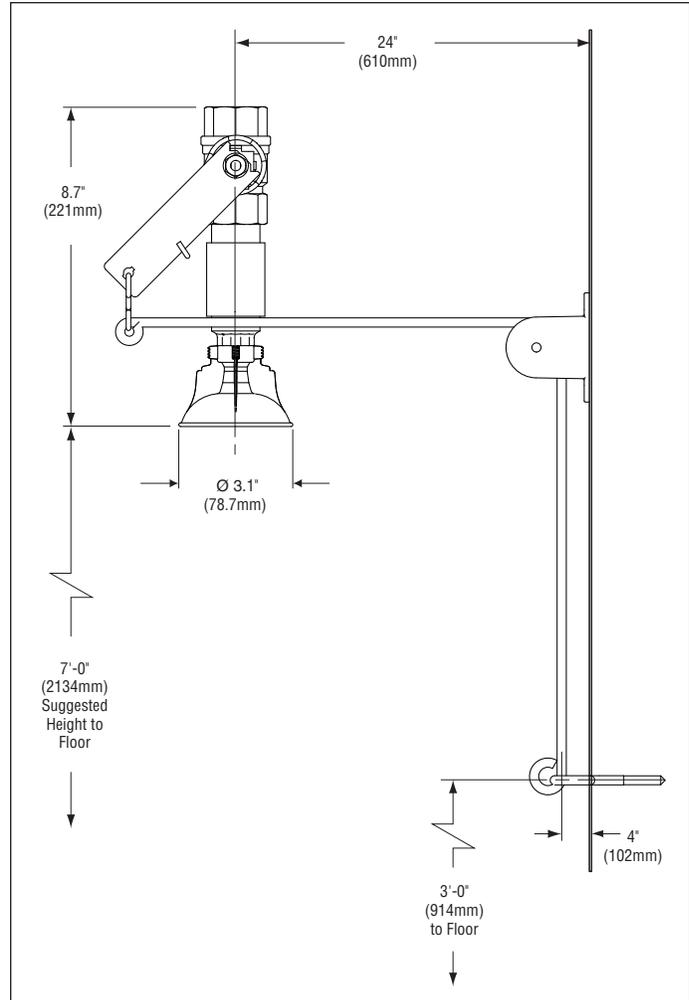

Model	Description
<input type="checkbox"/> S19-130F	Cord-Operated Drench Shower w/ Vertical Supply
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve