


Barrier Free Cabinet Concealed Swing-Down Eyewash

Model S19-282, S19-282PT

- Complies with ANSI Standard Z358.1-2004
- Concealed Fixture
- Activated with Opening of Stainless Steel Door
- Waste Water Collected Back into the Cabinet's Internal Drain
- Chrome-Plated Brass Pipe and Fittings
- Universal Sign and Inspection Tag Included
- Designed to Mount Between 2 x 4 Wall Studs 16" on Centers

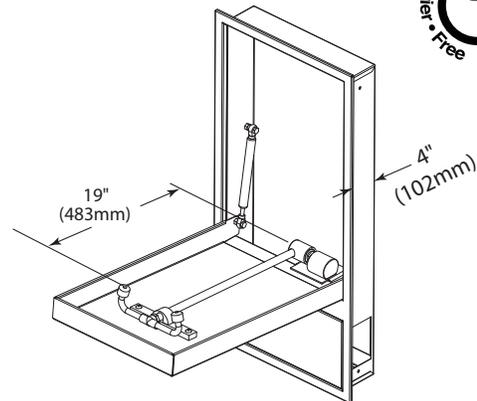

Specifications

Unit design saves space and fits easily into any work environment. Stainless steel cabinet and door conceal eyewash fixture with a consistent and appealing exterior appearance, suitable to any application. Especially ideal for areas where space is limited or where a floor drain is not available. Eyewash activates by pulling cabinet door down. A gas spring softens the action of opening the unit allowing the door to descend in a smooth and controlled manner. Water is collected by the door assembly and directed back into the wall for drainage. Eyewash has an integral flow control in the shank. Unit is flush mounted in the wall.

Construction

Pipe and fittings are chrome-plated brass. Wall cabinet and door are constructed of durable, corrosion resistant stainless steel. Brass stop-valve, tailpiece, and fittings are concealed behind a second locked hinged door at the lower section of the unit for easy yet restricted access.

Installation

S19-282 and S19-282PT require a rough wall opening of 14-1/2"W x 32-1/4"H x 4"D. Secure to framing with screws (supplied by installer) at holes provided.

Standard Equipment

Standard Sprayhead Assembly

Chrome-plated brass sprayhead assembly with twin, soft flow eye wash heads. Safe, steady water flow under varying water supply conditions from 30-90 PSI is assured by an integral flow control.

Cabinet

Corrosion resistant stainless steel cabinet and doors. Top section of the door conceals the eyewash unit which is activated with a plastic molded wide grip handle. Bottom of cabinet conceals tailpiece and fittings, and is provided with a locking device to prevent tampering with the unit. Open back and side panels in the bottom section of cabinet to accommodate multiple waste options.

Valve

Chrome-plated brass 1/2" NPT stay-open valve. Water flow is activated by pulling door down 90° with supplied handle. Water still will continue to flow until door is returned to original position.

Pipe and Fittings


Chrome-plated brass

Water Supply

1/2" NPT

Waste

1-1/4" Drain provided with tailpiece. P-trap waste option also available (S19-282PT).

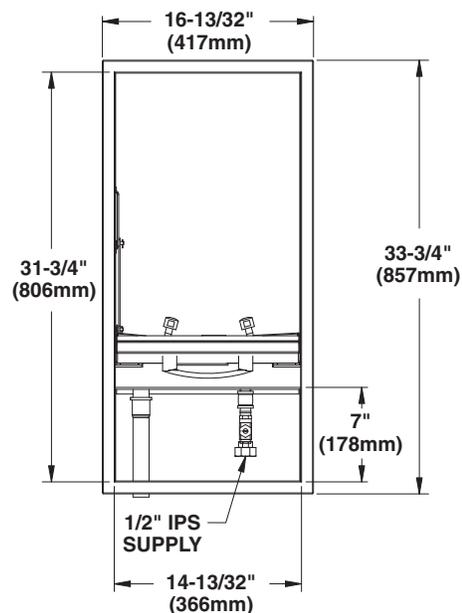

MODEL	
Model No.	Description
<input type="checkbox"/> S19-282	Concealed Cabinet Mounted, Swing-Down Eyewash Fixture – Barrier Free
<input type="checkbox"/> S19-282PT	Concealed Cabinet Mounted, Swing-Down Eyewash Fixture – Barrier Free with P-Trap

Document No. 4479

This information is subject to change without formal notice.
© 2004 Bradley Corporation
2-20-2006 (1 Page Total)

EF4479.1

Bradley 

P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone 1-800-BRADLEY FAX 262-251-5817
Web Site: <http://www.bradleycorp.com>