

Laboratory Application Eye Wash Fixture

Model S19-240 (Shown)

Model S19-240FW

- Complies with American National Standard Z358.1-2004
- Chrome-Plated Brass Pipe and Fittings.
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty

Specifications

Unit design saves space and fits easily into any work environment. Eye and eye/face washes operate quickly by a large, highly visible push handle. Safe, steady water flow under varying water supply conditions from 30-90 PSI is assured by integral flow control in the sprayhead assembly.

UPC and cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Construction

PVC push handle is colored bright yellow for high visibility in emergency situations. Pipe and fittings are chrome-plated brass.

Standard Equipment

Standard Sprayhead Assembly

Chrome-plated brass sprayhead assembly with twin, soft flow, eye wash heads and protective sprayhead covers. The integral flow control assures safe, steady flow under varying water supply conditions from 30-90 PSI. (S19-240)

Eye/Face Wash Sprayhead Assembly

Twin perforated disc eye/face wash heads with protective pop-off sprayhead covers. Safe, steady water flow under varying water supply conditions is assured by a flow control for 30-90 PSI. (S19-240FW)

Valve




Chrome-plated brass 1/2" IPS stay-open ball valve. Hand operated by a large, highly visible safety yellow PVC push handle.

Pipe and Fittings

Chrome-plated brass pipe and fittings.

Water Supply

1/2" IPS.

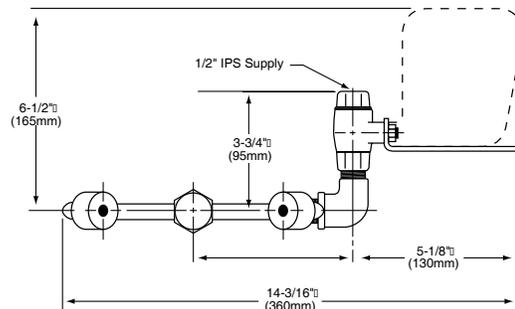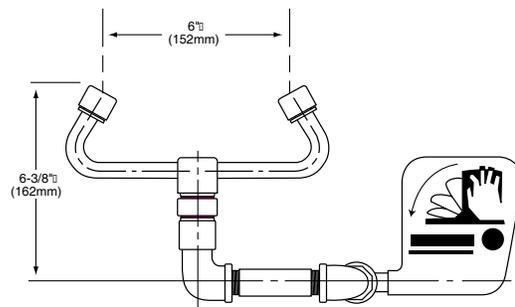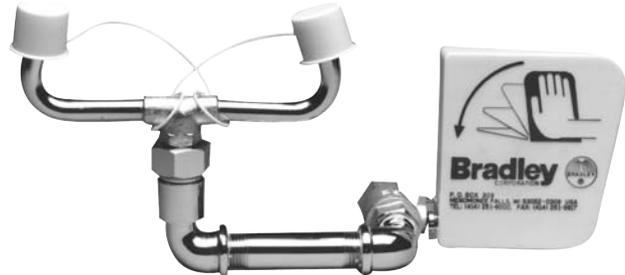

MODEL	
Model No.	Description
<input type="checkbox"/> S19-240	Laboratory Application Eye Wash Fixture
<input type="checkbox"/> S19-240FW	Laboratory Application Eye/Face Wash Fixture

Document No. 4450