

# Laboratory Application Drench Hose/Eye Wash Fixture Model S19-240E

- Complies with American National Standard Z358.1-2004
- Chrome-Plated Brass Pipe and Fittings.
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty

## Specifications

Unit design saves space and fits easily into any work environment. Eye wash operates quickly by a large, highly visible push handle. Safe, steady water flow under varying water supply conditions from 30-90 PSI is assured by integral flow control in the sprayhead assembly. Unit also removable for use as a hand-held drench hose.

### UPC and cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

## Construction

PVC push handle is colored bright yellow for high visibility in emergency situations. Pipe and fittings are chrome-plated brass.

## Standard Equipment

### Standard Sprayhead Assembly

Chrome-plated brass sprayhead assembly with twin, soft flow, eye wash heads and protective sprayhead covers. The integral flow control assures safe, steady flow under varying water supply conditions from 30-90 PSI.

### Valve

Chrome-plated brass 1/2" IPS stay-open ball valve. Hand operated by a large, highly visible safety yellow PVC push handle.

### Pipe and Fittings


Chrome-plated brass pipe and fittings.

### Water Supply

1/2" IPS.

### Drench Hose

8' (2438mm) yellow reinforced thermoplastic hose has 1/2" IPS male thread. Burst strength is 250PSI.

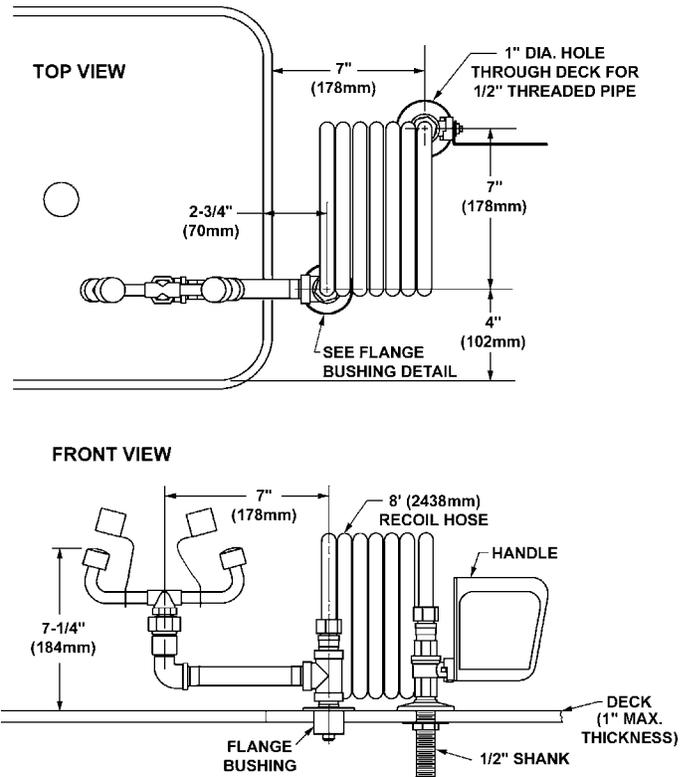

MODEL	
Model No.	Description
□ S19-240E	Deck-Mounted Drench Hose/Eye Wash

Document No. 4455