

Deck/Counter Top–Mounted Eye/Face Wash Fixture Model S19-260

- Complies with American National Standard Z358.1-2004
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty

Specifications

Unit design saves space and fits easily into any work environment. Eye wash operates quickly by a large, highly visible push handle. Safe, steady water flow under varying water supply conditions from 30-90 PSI is assured by integral flow control in the sprayhead assembly.

UPC and cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Construction

Eye wash bowl is corrosion-resistant stainless steel, with stainless steel push down handle.

Standard Equipment

Eye Wash Bowl

13-5/8" (327mm) diameter corrosion-resistant stainless steel.

Eye/Face Wash Spray Heads

Twin perforated disc eye/face wash heads with protective pop-off spray-head covers. Safe, steady water flow under varying water supply conditions is assured by a flow control for 30-90 PSI.

Valve

Chrome-plated 1/2" IPS stay-open ball valve. Hand operated by a large, highly visible push handle.

Pipe and Fittings


Galvanized steel protected with BRADTECT™ safety yellow coating.

Waste

Dome-type strainer and 1-1/4" drain fitting furnished. Tailpiece and trap to conform to local codes by others.

Water Supply

1/2" IPS.

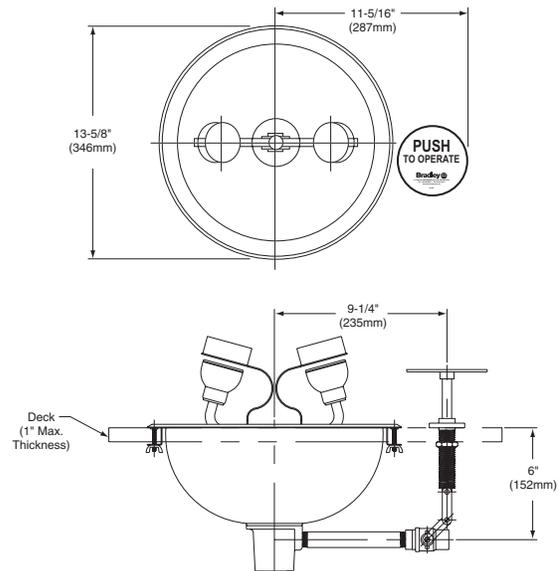

MODEL	
Model No.	Description
□ S19-260	Deck/Counter Top–Mounted Eye/Face Wash Fixture

Document No. 4460