

- Complies with American National Standard Z358.1-2004
- Galvanized Steel Protected with BRADTECT™ Safety Yellow Coating (S19-310NN) or all-Stainless Steel (S19-310NNS)
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending

Specifications

This unit is made specifically for areas subject to freezing and fits easily into any work environment. Shower and eyewash valves operate quickly by large, highly visible push handles. Shower provides a superior washdown with a more even spray pattern. Safe, steady eyewash water flow under varying water supply conditions from 30-90 PSI is assured by integral flow control in the sprayhead assembly.


cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Standard Equipment

SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic includes 10-3/4" [273mm] diameter corrosion-resistant stainless steel shroud (S19-310NN). High performance stainless steel showerhead is corrosion-resistant (S19-310NNS). SpinTec drench showerhead features integral 23 GPM flow control, conserving water and helping to accurately size your tepid water system.

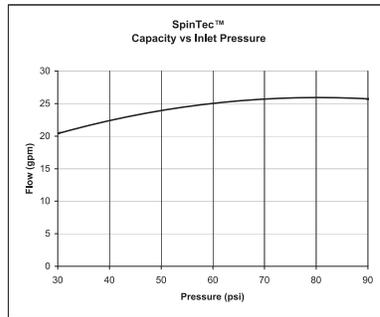

Standard Sprayhead Assembly

Chrome-plated brass sprayhead with twin, soft flow, eyewash heads and protective sprayhead covers. Safe, steady water flow under varying water supply conditions from 30–90 PSI is assured by integral flow control in the sprayhead assembly. NOTE: The ANSI Z358.1 standard requires an uninterrupted supply of flushing fluid at a minimum 30 PSI flowing pressure. Model S19-310NNS is all-stainless steel.

Independent Frostproof Shower and Eyewash Valves

1" NPT stay-open valves. Hand operated by a stainless steel push flag handles.

Pipe and Fittings

Galvanized steel protected with BRADTECT™ safety yellow coating. Standard depth is 36" (914mm). Special order for other bury depths. (18"–48"–60"–72") NOTE: Special order depths are non-returnable. Model S19-310NNS is all-stainless steel.


Water Supply

1-1/4" NPT.

Recommended Option:
 Navigator S19-2100 EFX25
 Emergency Thermostatic Mixing Valve

NAVIGATOR

Satisfies ANSI Z358.1-2004 tepid water requirements.

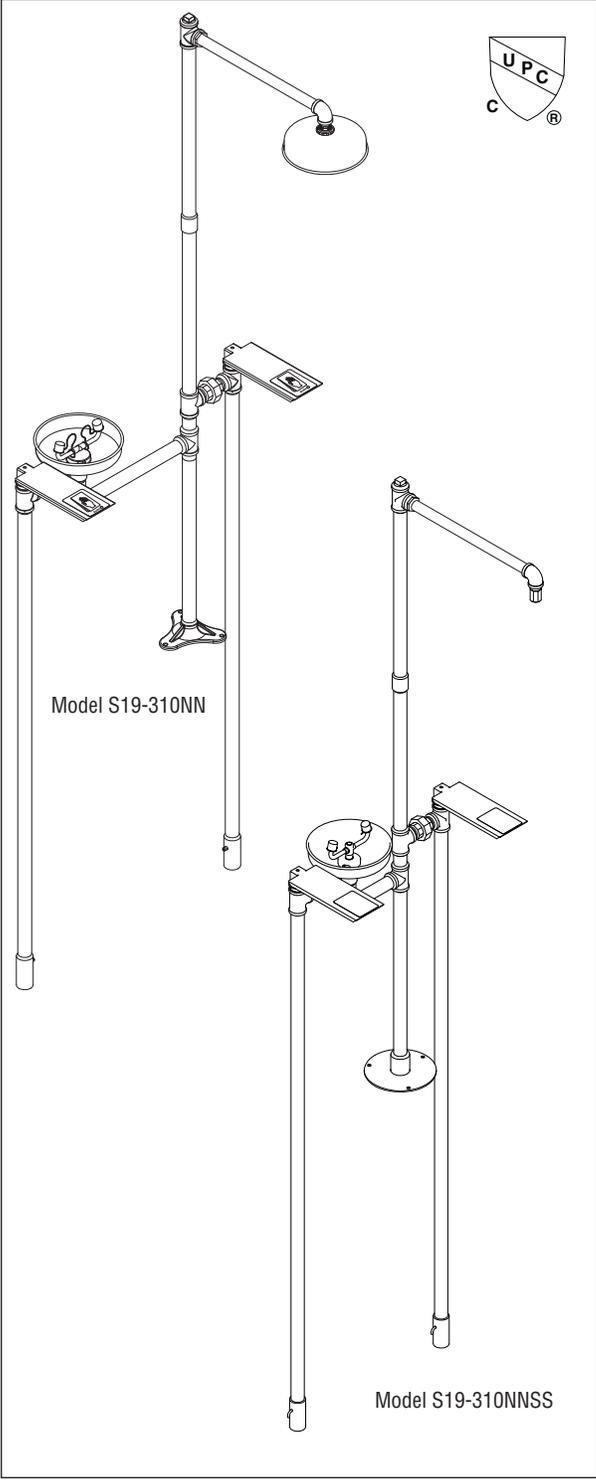



Model	Description
<input type="checkbox"/> S19-310NN	Independent Operation Frostproof Drench Shower and Eyewash
<input type="checkbox"/> S19-310NSS	Independent Operation Frostproof Drench Shower and Eyewash - All Stainless Steel Unit
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve



All dimensions assume standard thread engagement. Variations in manufacturing allow for +/- 1/8" (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by 1/8" (3mm).

Model S19-310NN

Model S19-310NSS

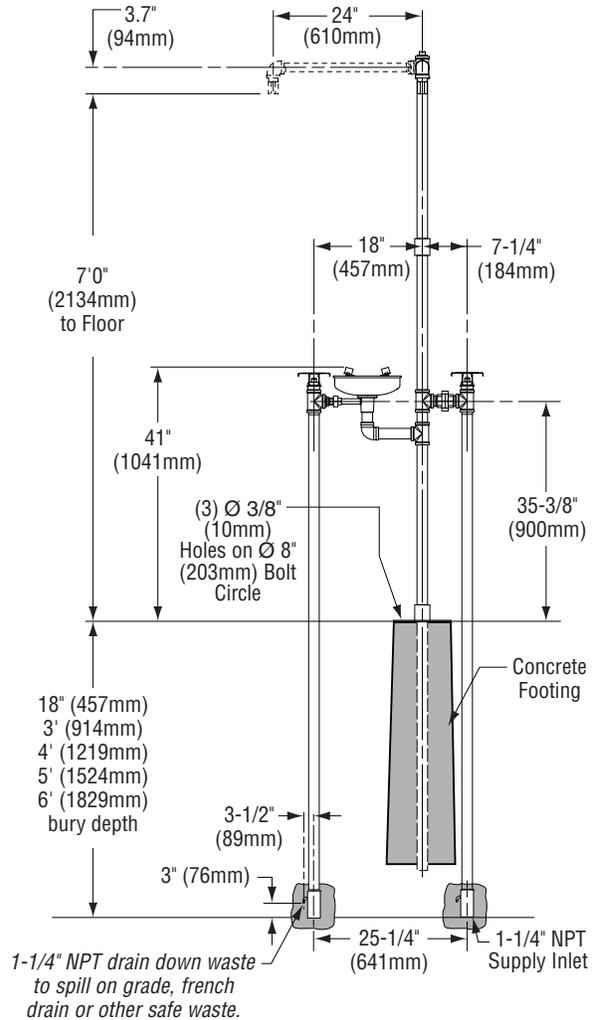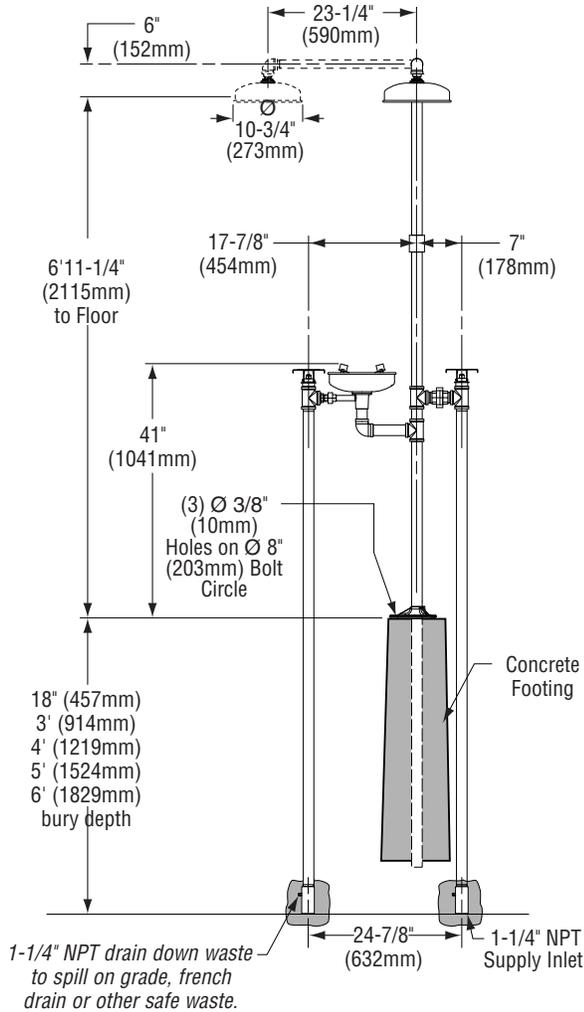

Not less than 3 cubic yards of crushed stone around and below drain down waste outlet for drainage.