

- Complies with American National Standard Z358.1-2004
- All Stainless Steel
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending



Specifications

Combination Drench Shower and Eyewash Unit saves space and fits easily into any work environment. Shower valve operates quickly by a pull rod with a triangular handle. Shower provides a superior washdown with a more even spray pattern. Eyewash operated by a large, highly visible push handle. Safe, steady water flow under varying water supply conditions from 30–90 PSI is assured by integral flow control in the sprayhead assembly. NOTE: The ANSI Z358.1 standard requires an uninterrupted supply of flushing fluid at a minimum 30 PSI flowing pressure.


cUPC Approved:

S19-310SS16 is certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Standard Equipment

SpinTec™ Showerhead

High performance type 316 corrosion-resistant stainless steel showerhead with hexagonal profile measures 1-9/16" (40mm) point-to-point. SpinTec drench showerhead features integral 23 GPM flow control, conserving water and helping to accurately size your tepid water system.

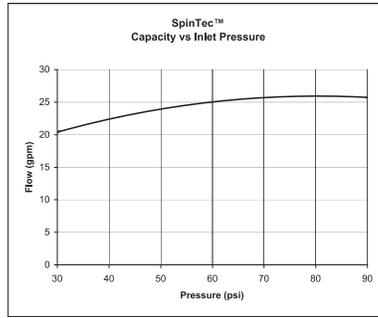

Eyewash Bowl

10-3/4" (273mm) diameter type 316 corrosion-resistant stainless steel.

Standard Sprayhead Assembly

Type 316 corrosion-resistant stainless steel sprayhead with twin, soft flow, eyewash heads and protective sprayhead covers. Safe, steady water flow under varying water supply conditions from 30–90 PSI is assured by integral flow control in the sprayhead assembly. NOTE: The ANSI Z358.1 standard requires an uninterrupted supply of flushing fluid at a minimum 30 PSI flowing pressure. S19-310FSS is all stainless steel.

Shower Valve

Type 316 corrosion-resistant stainless steel 1" NPT stay-open ball valve. Operated by a type 316 stainless corrosion-resistant steel pull rod with triangular handle.

Eyewash Valve

Type 316 corrosion-resistant stainless steel 1/2" NPT stay-open ball valve. Hand operated by highly visible type 316 corrosion-resistant stainless steel push handle or foot treadle.


Pipe and Fittings

Type 316 corrosion-resistant stainless steel.

Water Supply


1-1/4" NPT.

Recommended Option:
Navigator S19-2100 EFX25
Emergency Thermostatic Mixing Valve



NAVIGATOR

Satisfies ANSI Z358.1-2004
tepid water requirements.

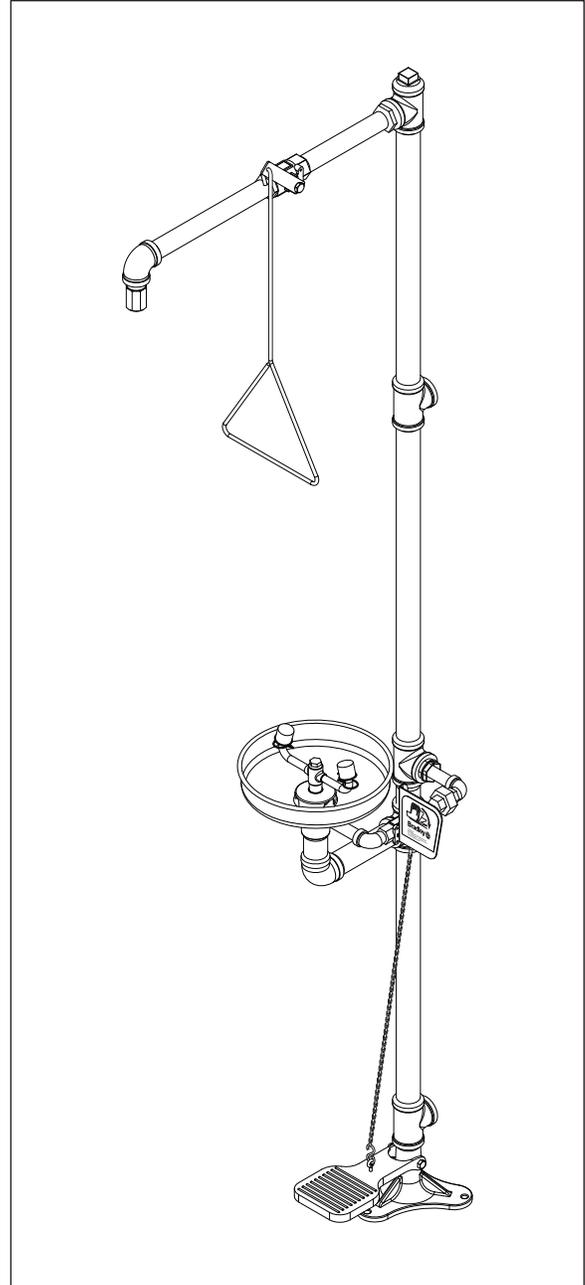

Model	Description
<input type="checkbox"/> S19-310	Drench Shower and Eyewash - All Type 16 Stainless Steel Unit
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve

 Local codes may require the installation of a backflow prevention valve to complete proper installation. Compliance with local codes is the responsibility of the installer. Valve must be tested annually to verify that it is functioning properly. Backflow prevention valves are not included with the fixture and may be supplied by the contractor or purchased from Bradley Corporation.

 All dimensions assume standard thread engagement. Variations in manufacturing allow for +/- 1/8" (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by 1/8" (3mm).

