

- Complies with American National Standard Z358.1-2004
- Includes Wall-Mounting Bracket, Universal Identification Sign and Inspection Tag
- Full, One-Year Warranty

Specifications

S19-921: Self-contained eyewash unit is ideal anywhere water supply is not available. Flushes eyes for 15 minutes at a minimum of 0.4 gallons/minute by using only 7 gallons of water. Transparent tank assembly lets you see at a glance when it's time to clean or refill the tank. Sturdy pedestal with hinged eyewash tray pulls down in one quick motion. Removable tank is inverted onto pedestal, piercing a liner. Stainless steel clamps hold tank to pedestal. When arm is pulled down, water flow is activated.

S19-921H: Insulated heater jacket thermostatically controls water in weather conditions down to -10°F (-12.22°C). LED indicator lights ensure proper operation of heaters. GREEN means power is ON. AMBER means heaters are in operation. RED means unit has malfunctioned. This will automatically shut the unit off. Pulling front strap down and away from unit activates eyewash. Uses standard 120VAC power cord.

S19-899: One 8-oz. bottle of water preservative with one replacement cap and three liners.

Construction

Refillable eyewash tank fills to 7 gallons. Weighs 60 lbs. filled and 3.5 lbs. empty. Transparent tank made of impact resistant plastic, colored bright yellow for high visibility in emergency situations. Pedestal supports the eyewash tank and weighs 6 lbs. The yellow pedestal and black pull-down arm are made of impact and chemical resistant plastic. Wall bracket is stainless steel. Yellow insulated jacket made of 200 Denier foam-backed nylon oxford w/clear vinyl pocket for indicator light box. Silicone rubber pad heaters have PSA adhesive backing for ease of installation.

Standard Equipment

Tank

12"H x 22"W x 9"D tank made of transparent yellow polycarbonate.

Pedestal

13-1/2"H x 22"W x 18-1/2"D pedestal made of opaque yellow polypropylene, with a black polypropylene pull-down arm.

Concentrate

One 8-oz. bottle of water preservative mixes with 7 gallons of potable water. Preservative prevents bacteria, fungi, and algae growth in tank for up to four months.

Wall Bracket


Stainless steel mounting bracket.

Waste

Dome-type strainer, 1-1/4" drain fitting and tailpiece furnished.

Water Supply

1/2" IPS.

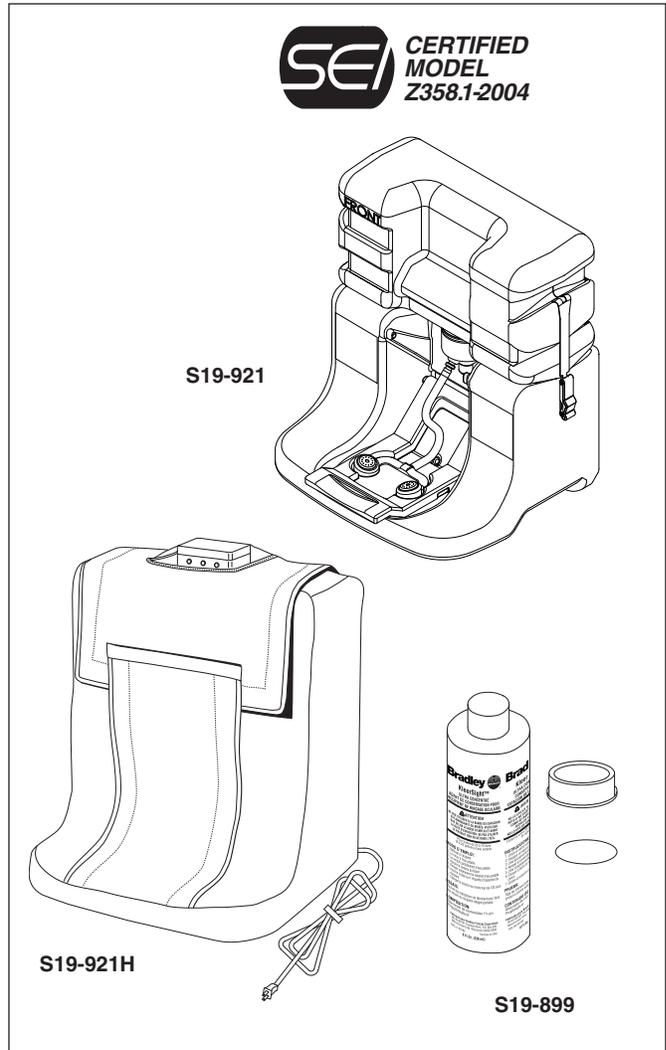

Jacket

High-visibility yellow, waterproof insulated jacket made of 200 Denier foam-backed nylon w/clear vinyl pocket. Includes 9' cord.

Heaters

121-watt tank heater and 60-watt tube heater made of silicone rubber with PSA adhesive backing.

Dual Thermostat

75°F +/- 5° normal operation thermostat in series with 90°F +/- 5° high limit, manually reset thermostat.

Indicator Lights

Green, Amber and Red LED indicator.

Heater jackets are not rated for outdoor use.

Model	Description
<input type="checkbox"/> S19-921	On-Site® Gravity Fed Eyewash-Complete Unit Unfilled, includes 8 oz. concentrate
<input type="checkbox"/> S19-921H	On-Site® Heated Gravity Fed Eyewash
<input type="checkbox"/> S19-899	On-Site® Refill Kit, includes 8 oz. concentrate, replacement cap and three liners.



All three models are non-cancelable, non-returnable.

