



- G1662** Emergency Shower, Free Standing, Plastic Shower Head
- G1662SSH** Emergency Shower, Free Standing, Stainless Steel Shower Head

**APPLICATION:** Free standing emergency shower.

**SHOWER HEAD:** 10" diameter. Shower head is orange ABS plastic (G1662) or stainless steel (G1662SSH).

**VALVE:** 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and Teflon® seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

**PIPE AND FITTINGS:** Schedule 40 galvanized steel. Furnished with orange polyethylene covers on vertical piping for high visibility and corrosion resistance.

**SUPPLY:** 1 1/4" NPT female top or side inlet.

**SIGN:** ANSI-compliant identification sign.


### Available Options

- PCC** All-polished chrome plated brass construction.
- GRN** Safety green ABS plastic shower head.
- YEL** Safety yellow ABS plastic shower head.
- PCH** Polished chrome plated cast brass shower head.
- FC20** Regulates shower flow rate to 20 GPM.
- SC** Self-closing ball valve. *Note: Emergency showers with self-closing valves do not comply with ANSI Z358.1 - 2004.*
- HS** Auxiliary hand-held drench hose for rinsing eyes, face or body. Unit has single FS-Plus™ spray type outlet head, self-closing valve with squeeze handle, 8 ft. reinforced PVC hose and mounting bracket.
- AP280-100 ELECTRIC LIGHT AND ALARM HORN**  
Flashing light and horn serve to summon assistance when shower is activated.
- TMV** G3800 thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2004. Refer to "Tempering Units" section for complete technical and product selection information.
- AP250-015 MODESTY CURTAIN**  
Modesty curtain for horizontal shower installation.





- **G1662** Emergency Shower, Free Standing, Plastic Shower Head
- **G1662SSH** Emergency Shower, Free Standing, Stainless Steel Shower Head

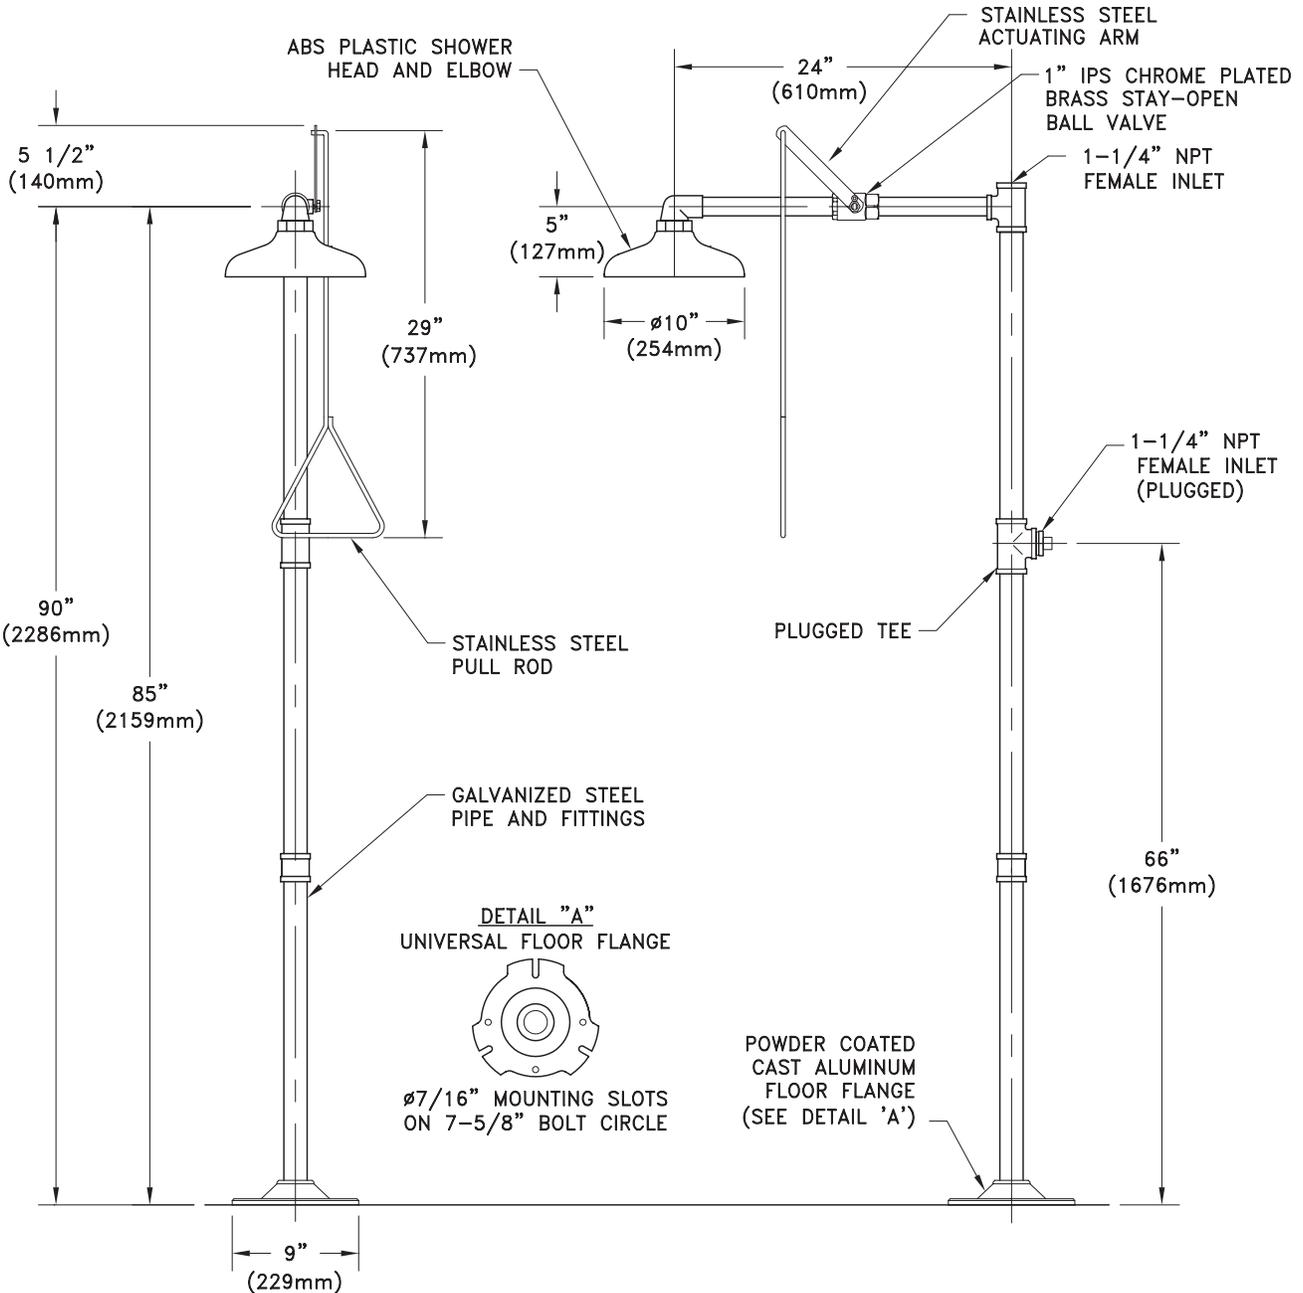

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm 1/4"$  (6mm). rev. 0308

Sign Included

