



□ **G1993** Safety Station with Eye/Face Wash, All-PVC Construction

APPLICATION: All-PVC combination eye/face wash and shower safety station. Unit is constructed entirely of PVC and PVC-coated components for superior corrosion resistance. Ideal for industrial environments where harsh acids or caustics are present. Two large FS-Plus™ spray-type outlet heads deliver a flood of water for rinsing eyes and face.

SHOWER HEAD: 10" diameter orange ABS plastic.

SHOWER VALVE: 1" IPS PVC-coated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and Teflon® seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

SPRAY HEAD ASSEMBLY: Two FS-Plus™ spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from water.

EYE/FACE WASH BOWL: 11 1/2" orange ABS plastic.

EYE/FACE WASH VALVE: 1/2" IPS PVC-coated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and Teflon® seals.

PIPE AND FITTINGS: Schedule 80 PVC.

SUPPLY: 2" IPS socket weld top female inlet.

WASTE: 2" IPS socket weld female outlet.

SIGN: Furnished with ANSI-compliant identification sign.

QUALITY ASSURANCE: Valve and spray head assemblies are factory assembled and water tested prior to shipment.


Available Options

- **FC20** Regulates shower flow rate to 20 GPM.
- **GRN** Green ABS plastic shower head and bowl.
- **YEL** Yellow ABS plastic shower head and bowl.
- **SSH** Stainless steel shower head.
- **AP275-100 ELECTRIC LIGHT AND ALARM HORN**
Light and alarm horn summon assistance when eye/face wash or shower is activated.
- **TMV** G3800 thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2004.





□ G1993 Safety Station with Eye/Face Wash, All-PVC Construction

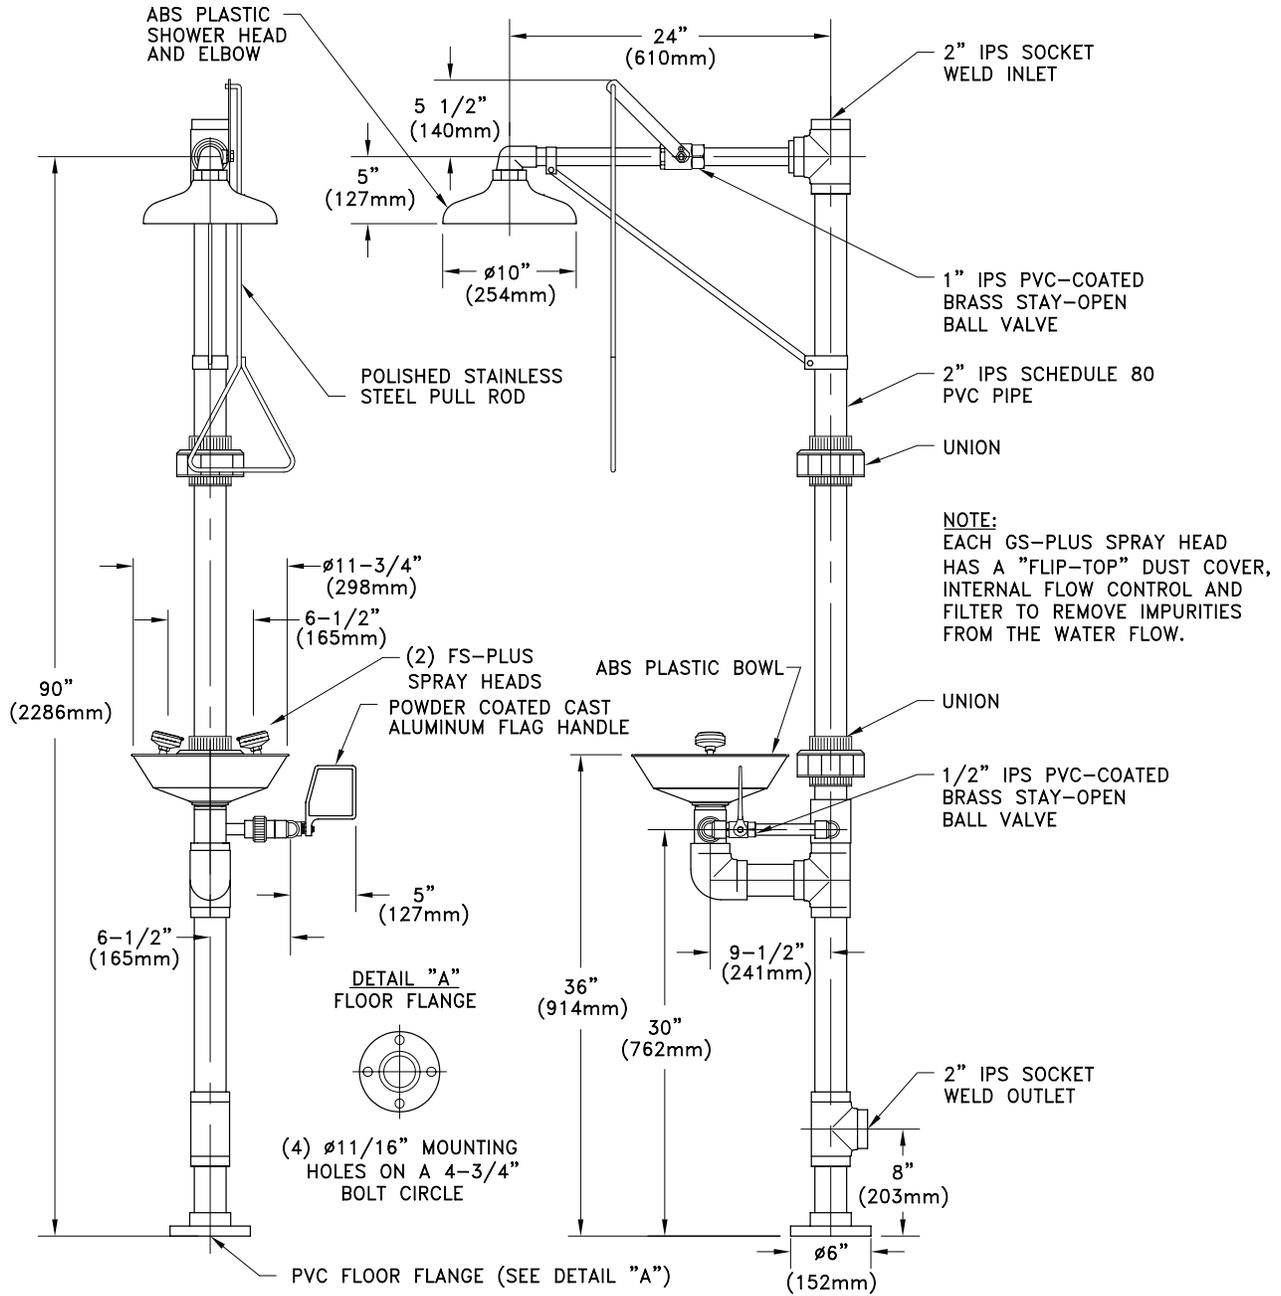

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4$ " (6mm). rev. 1009

Sign Included

