



- GBF1643** Barrier-Free Emergency Shower, Horizontally Mounted, Plastic Shower Head
- GBF1643SSH** Barrier-Free Emergency Shower, Horizontally Mounted, Stainless Steel Shower Head

**APPLICATION:** Handicapped accessible emergency shower for horizontal mounting. Unit should be installed so that shower head is at least 82" above floor and 32" from wall or nearest obstruction.

**ADA COMPLIANCE:** When installed at recommended mounting heights, unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach and distance from obstructions).

**SHOWER HEAD:** 10" diameter. Shower head is orange ABS plastic (GBF1643) or stainless steel (GBF1643SSH).

**VALVE:** 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and Teflon® seals. Furnished with stainless steel actuating arm and 59 1/2" stainless steel pull rod.

**PIPE AND FITTINGS:** 1" IPS galvanized steel nipple with orange ABS plastic elbow (GBF1643) or galvanized street elbow (GBF1643SSH)

**SUPPLY:** 1" NPT female inlet.

**SIGN:** ANSI-compliant identification sign.


### Available Options

- GRN** Safety green ABS plastic shower head.
- YEL** Safety yellow ABS plastic shower head.
- PCC** All-polished chrome plated brass construction.
- PCH** Polished chrome plated cast brass shower head.
- FC20** Regulates shower flow rate to 20 GPM.
- SC** Self-closing ball valve. *Note: Emergency showers with self-closing valves do not comply with ANSI Z358.1 - 2004.*
- TMV** G3800 thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2004. Refer to "Tempering Units" section for complete technical and product selection information.
- APBF250-015 MODESTY CURTAIN**  
Modesty curtain for barrier-free horizontal shower installation.





- **GBF1643** Barrier-Free Emergency Shower, Horizontally Mounted, Plastic Shower Head
- **GBF1643SSH** Barrier-Free Emergency Shower, Horizontally Mounted, Stainless Steel Shower Head

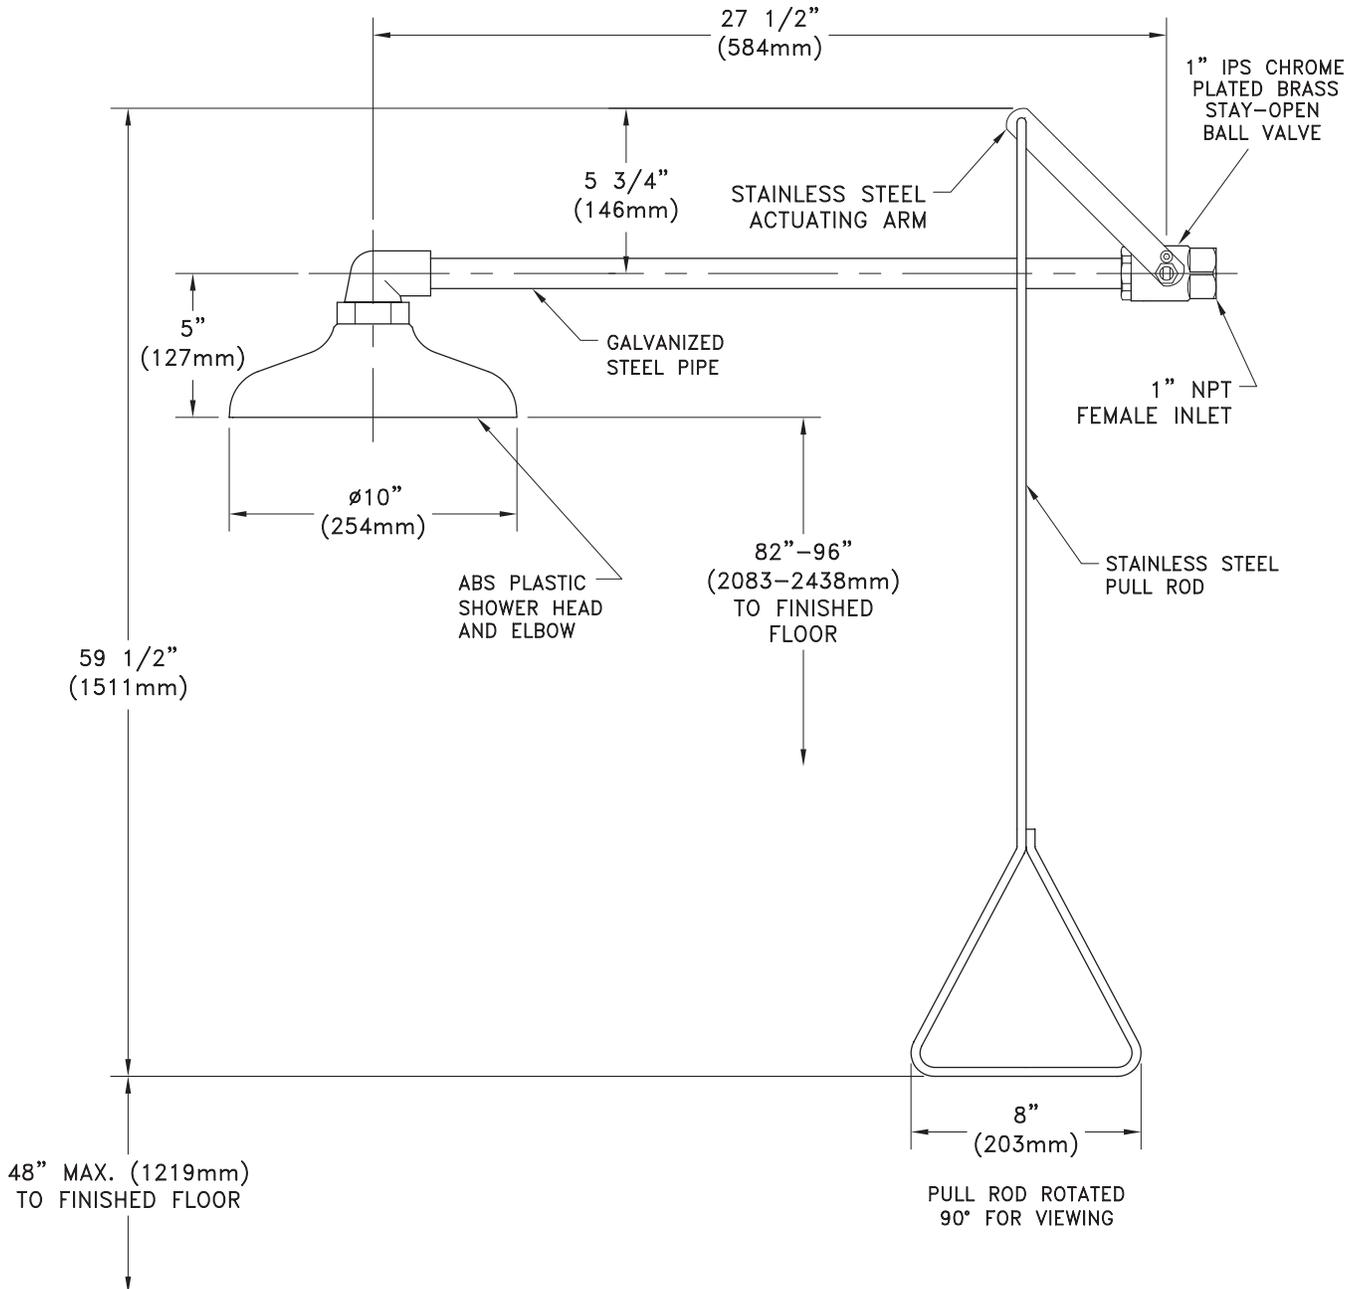

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 0308

Sign Included

