



### **GBF1909PCC** Barrier-Free Safety Station with WideArea™ Eye/Face Wash, All-Polished Chrome Plated Brass Construction

**APPLICATION:** Handicapped accessible combination WideArea™ eye/face wash and shower safety station. Shower head and pull rod are extended for improved access. Bowl is lowered and extended to permit access by wheelchair user. Profile of unit is “flattened” to comply with maximum height and knee clearance requirements. Unit is constructed of polished chrome plated brass pipe, fittings and components for attractive appearance and superior durability.

**ADA COMPLIANCE:** Unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach, minimum knee clearance and distance from obstructions).

**SHOWER HEAD:** 8" diameter polished chrome plated cast brass.

**SHOWER VALVE:** 1" IPS chrome plated brass stay-open ball valve with stainless steel actuating arm and 47 1/2" stainless steel pull rod.

**SPRAY HEAD ASSEMBLY:** Four GS-Plus spray heads. Each head has a “flip-top” dust cover, internal flow control and filter to remove impurities from water flow.

**EYE/FACE WASH BOWL:** 11 1/2" stainless steel.

**EYE/FACE WASH VALVE:** 1/2" IPS chrome plated brass stay-open ball valve with flag handle.

**PIPE AND FITTINGS:** Polished chrome plated brass.

**SUPPLY:** 1 1/4" NPT female top inlet.

**WASTE:** 1 1/4" NPT female outlet. Outlet can be positioned at either 8" or 20" above finished floor by reversing lower pipe nipples.

**SIGN:** ANSI-compliant identification sign.

**QUALITY ASSURANCE:** Valve and spray head assemblies are factory assembled and water tested prior to shipment.


### Available Options

- BC** Stainless steel cover for eye/face wash bowl.
- FC20** Regulates shower flow rate to 20 GPM.
- HS** Auxiliary drench hose unit for rinsing eyes, face or body.
- APBF250-015 MODESTY CURTAIN**  
Modesty curtain for mounting on barrier-free safety station.
- AP275-200 ELECTRIC LIGHT AND ALARM HORN**  
Flashing light and alarm horn for mounting on safety station.
- TMV** G3800 thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2004.





### GBF1909PCC Barrier-Free Safety Station with WideArea™ Eye/Face Wash, All-Polished Chrome Plated Brass Construction

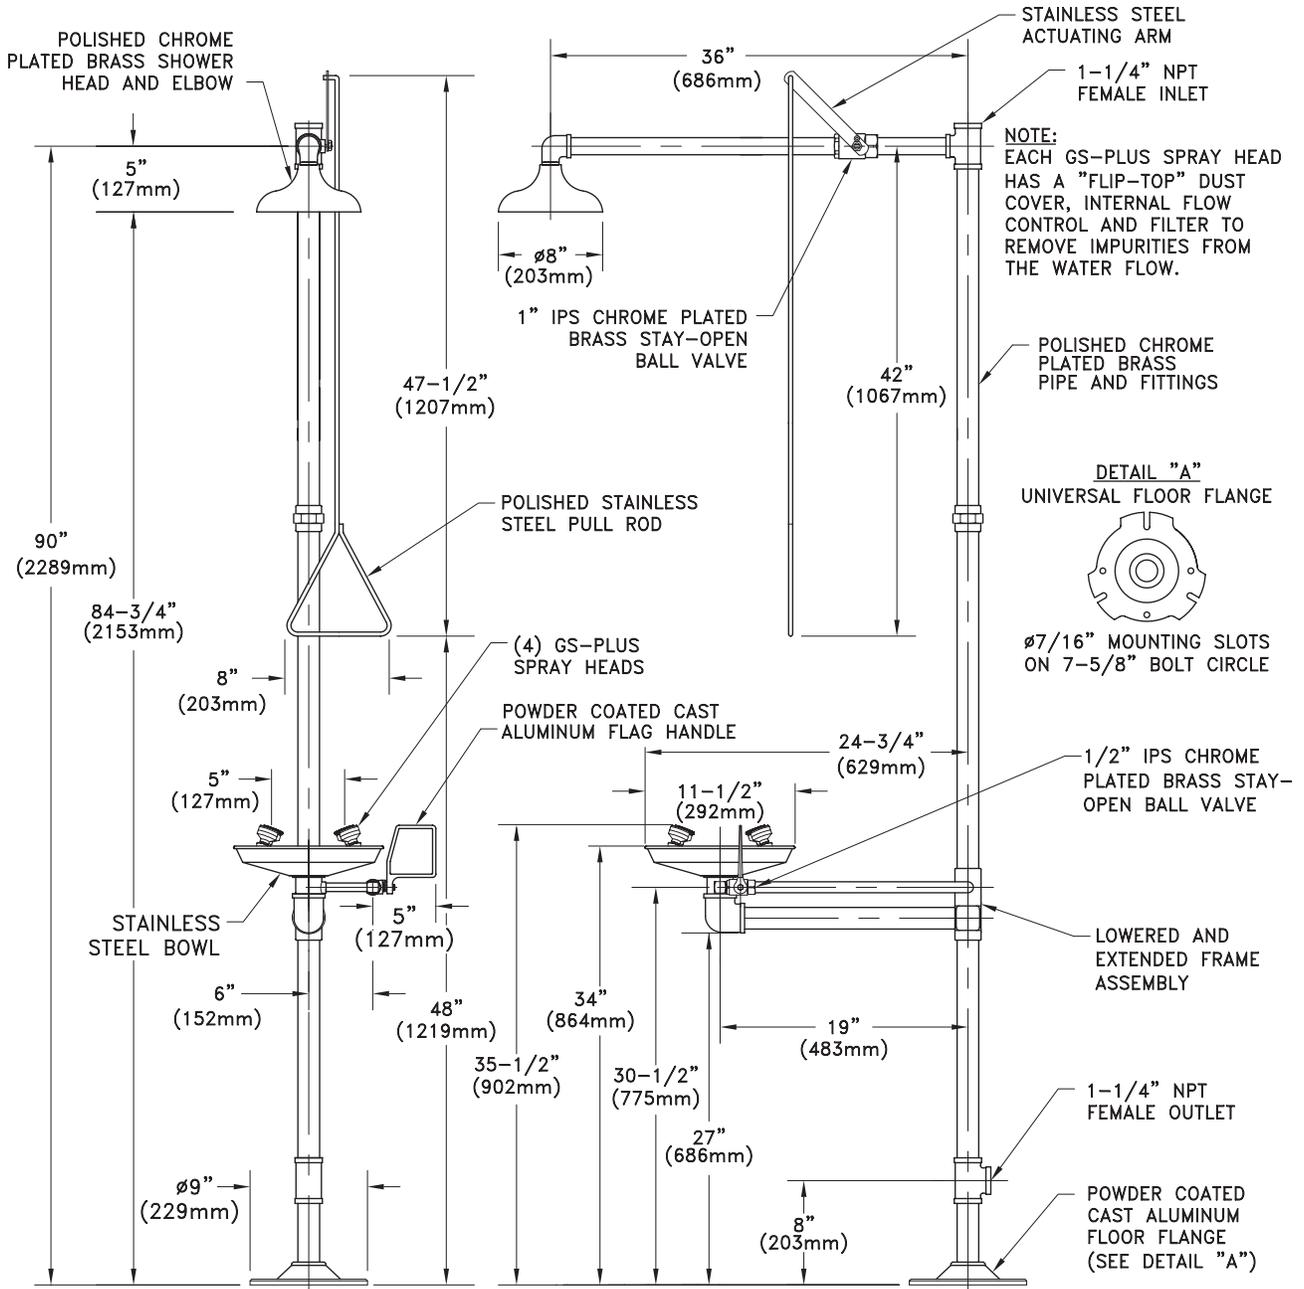

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 0308

Sign Included

