

SPEAKMAN®

SE-236

LIFESAVER® EMERGENCY SHOWER

DESCRIPTION

The SE-236 Lifesaver® Emergency Shower features a concealed ceiling mounted impeller action chrome-plated shower head with a horizontal supply. The unit is activated with a 1" stay-open ball valve operated by a stainless steel ring attached via a stainless steel chain.

SPECIFICATIONS

Showerhead: 10" flush mounted, polished chrome plated

Flow Control: Internal 20 gpm regulator

Valve: 1" NPT female brass, chrome-plated, stay-open valve

Flange: Brass, chrome plated



Pipe: 1" IPS galvanized steel

Activator: Stainless steel chain and ring

Performance: 20 gpm @ 20 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

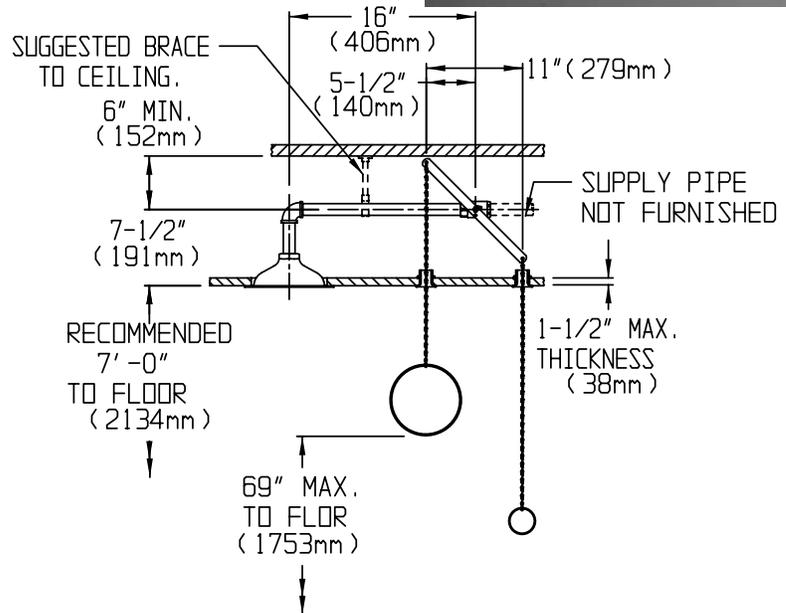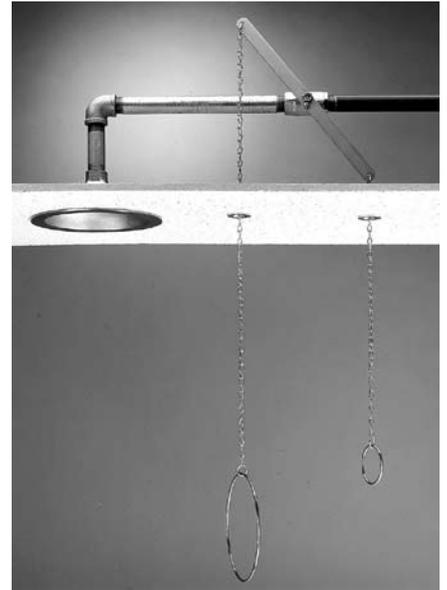

OPTIONS

- FLW Flow switch
- SSBV Stainless steel ball valve
- SSH Stainless steel showerhead

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____