

SPEAKMAN®

SE-237

LIFESAVER® EMERGENCY SHOWER



DESCRIPTION

The SE-237 Lifesaver® Emergency Shower features a concealed ceiling mounted impeller action chrome-plated shower head with a horizontal supply. The unit is activated with a 1" stay-open ball valve operated by a wall mounted lever.

SPECIFICATIONS

Showerhead: 10" flush mounted, polished chrome plated

Flow Control: Internal 20 gpm regulator

Valve: 1" NPT female brass, chrome-plated, stay-open valve

Cabinet: 18 gauge (0.048 thick) Type 304 stainless steel

Activator: Wall mounted stainless steel lever with black plastic rotating handle

Performance: 20 gpm @ 20 psi

Compliance: ANSI Z358.1



Universal Emergency Sign Included

AVAILABLE MODELS

- SE-237 Suitable for 6" walls
- SE-237-SR Suitable for 4" walls
- SE-237-SM Surface mounted, no cabinet minimum wall thickness is 4"

OPTIONS

- FLW Flow switch
- SSBV Stainless steel ball valve
- SSH Stainless steel showerhead

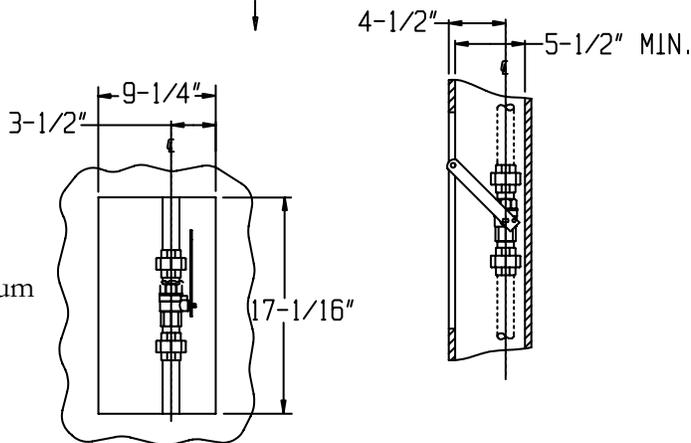

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____