

SPEAKMAN®

SE-6000-C1D1

COMBINATION SHOWER & EYE/FACE WASH

DESCRIPTION

SE-6000-C1D1 Freeze protected combination shower and eye/face wash units are wrapped with heat trace cable and in-sulation and are jacketed in PVC to protect them to -50°F Eye/Face wash features dual aerated spray outlets with auto-matic flow controls and flip top dust covers. The impellar action shower is activated by a high visibility yellow pull rod.

SPECIFICATIONS

Showerhead: 8" dia. cyclac® yellow plastic.


Flow Control: Internal 20 gpm regulator.

Valve: 1" nptf brass, chrome-plated. full flow stay-open ball valve.

Activator: Powder coated yellow, aluminum triangular pull rod.

Internal Stanchion: 1" IPS galvanized steel pipe inlet: 1" NPT male, bottom supply.

Finish: Safety green paint.

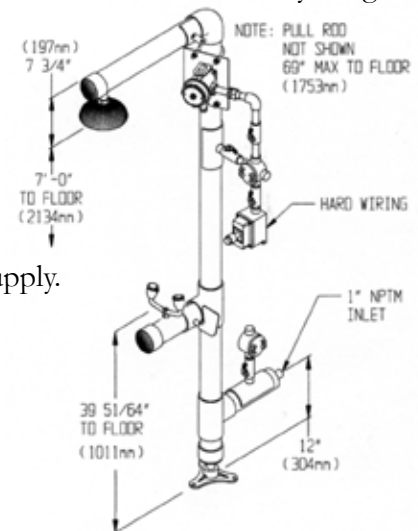

EYE/FACE WASH

Spray Heads: (2) yellow abs plastic spray outlets with flip-top dust caps.

Valve: 1/2" NPTF brass, chrome-plated. full flow stay-open ball valve.

Activator: Stainless steel push handle.

ELECTRIC

Heating Tape: Self-limiting parallel resistance cable with braided metal shield.

Thermostat: Preset, hermetically sealed single pole contact switch. Temperature range 60° to 70°F.

Insulation: Closed cell rubber foam.

Pilot Light: 0.025 watt red light with push test button.

Lights when thermostat closes and heating tape is activated.

Junction Box: Nema 4X water tight, dust tight and corrosion resistant for indoor or outdoor locations.

Power Supply: 120 vac, 60 cycle, single phase

Electrical Classification: Class 1 Division 1 Groups b,c,d

Ground Fault Protection: Installation will require minimum 30 mA GFPD.

Compliance: Meets ASME A112.18.1, ANSI Z358.1 and CSA B125-98

Counter thickness: Up to 2" thick

Universal Emergency Sign Included

OPTIONS

- ☐ FPV Freeze protection valve
- ☐ SPV Scald protection valve
- ☐ FLW Flow switch
- ☐ HTDH Hand held spray

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____