

SPEAKMAN®

SE-622

COMBINATION SHOWER AND EYEWASH

DESCRIPTION

SE-622 Safe-T-Zone® features a combination eyewash with twin aerated sprays and a stainless steel bowl combined on a stainless steel stanchion with an impeller action deluge showerhead which is activated by a stainless steel pull rod.

SPECIFICATIONS

Showerhead: 8" diameter 300 series stainless steel

Flow Control: Internal 20 gpm regulator

Valve: 1" NPT female 300 series stainless steel.

Full flow stay open ball valve

Activator: 300 series stainless steel triangular pull rod

Stanchion: 1½" stainless steel, 18 gauge tubing

Inlet & Waste: 1¼" NPT male

Performance: 20 gpm @ 30 psi.

Finish: Stainless steel

EYEWASH: SE-505

Bowl: 300 series stainless steel

Spray Heads: (2) aerated yellow nylon spray outlets.

Valve: ½" NPT female stainless steel. Full flow stay open ball valve

Activator: 300 stainless steel push handle


Performance: 3.0 gpm @ 30 psi.

Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- HFO Hand/Foot operation
- FPV Freeze protection valve
- SPV Scald protection valve
- FLW Flow switch
- HS Hand-held spray
- TS Top supply

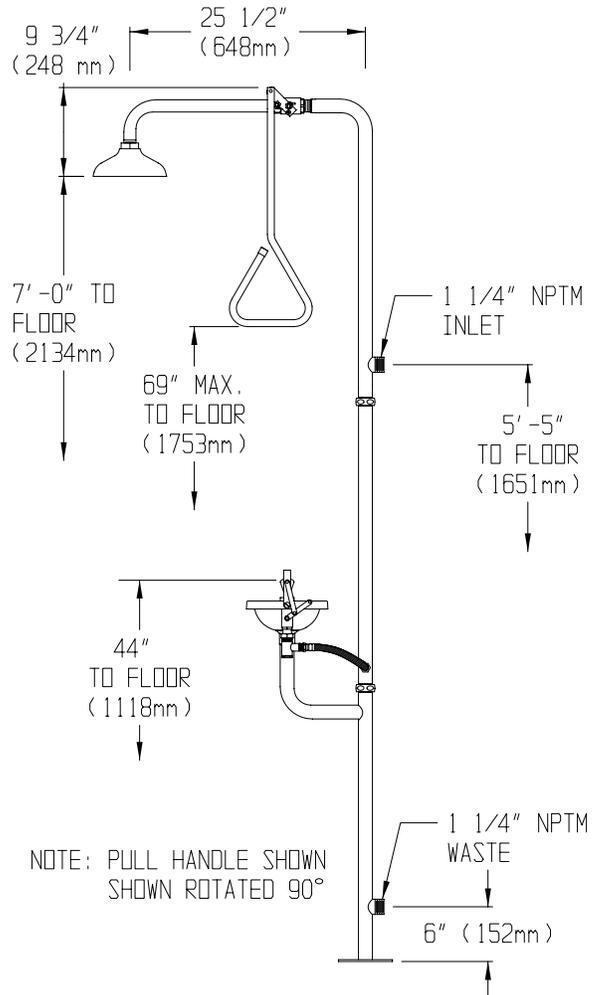

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____