

SPEAKMAN®

SEF-1800-SL

EYESAVER® FAUCET SPECIFICATIONS



DESCRIPTION

The SEF-1800-SL Eyesaver® faucet combines a gooseneck faucet with an independently operated eyewash. The faucet features a vandal resistant, single lever faucet utilizing a ceramic cartridge with an adjustable temperature limit.


SPECIFICATIONS

EYEWASH

Activator: Pull handle with graphics
Spray heads: (2) aerated yellow plastic spray outlets with flip-top dust caps
Performance: 2.6 gpm @ 30 psi
Compliance: ANSI Z358.1

FAUCET

Supply: 3/8" compression connections for hot inlet, 1/2" NPT connection for cold inlet
Valve: Ceramic cartridges covered by a 25-year warranty
Finish: Chrome plated brass
Activator: Lever
Performance: 2.2 gpm
Counter thickness: Up to 2" thick
Compliance: ASME A112.18.1, CSA B125-98
Universal Emergency Sign Included

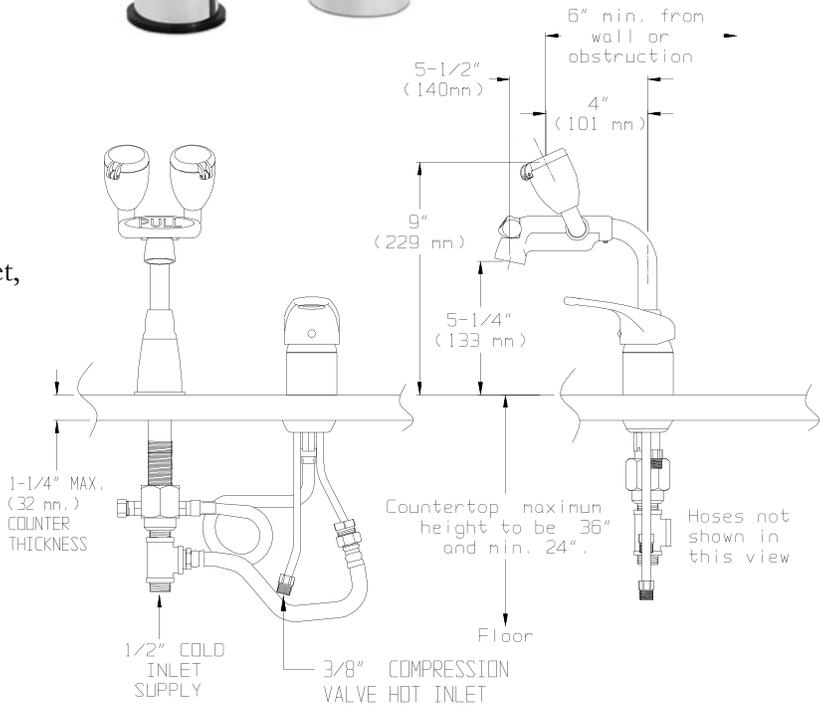

OPTIONS

- ADA 6" single lever handle
- BO Vandal resistant 0.5 gpm flow control
- LF Laminar flow outlet 2.2 gpm
- ST Serrated tip with vacuum breaker
- TW Addition of SE-370 thermostatic mixing valve
- NA No aerated eyewash
- 8 8" gooseneck spout

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____