

APPLICATION:

PRODUCT NAME:

SDDC POT FILLER HOSE STYLE
WITH VACUUM BREAKER

JOB NAME:

_____ SPECIAL CONFIGURATION
CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:

2140 WITH WALL HOOK

OPTIONS OR MODIFICATIONS:

- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
- ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE
- IN-LINE DUAL CHECK VALVE
- PIPE HOOK
- HANDLES (CROSS OR WRIST) CIRCLE STYLE
- VANDAL RESISTANT KIT
- OTHER _____

FEATURES

CONTROL VALVE

- * SINGLE DECK DUAL CONTROL
- * INTERNAL SPRING LOADED CHECK VALVES
- * HOT SIDE STEM - RIGHT HAND
- * COLD SIDE STEM - LEFT HAND
- * SWIVELLING SEAT DISKS
- * STAINLESS STEEL SEATS
- * STAINLESS STEEL SEAT SCREWS
- * STAINLESS STEEL HANDLE SCREWS
- * FLEXIBLE INLET HOSES

HOSE

- * 60" LENGTH
- * STAINLESS STEEL END FITTINGS
- * STAINLESS STEEL EXTERNAL JACKET
- * USDA APPROVED FOODGRADE INTERNAL RUBBER HOSE

POT FILLER VALVE

- * NO-MARRING TUBE
- * AERATED STREAM
- * 5.0 GPM AT 80 PSI

SWIVEL ELBOW


- * 360° TURNING RADIUS
- * ATMOSPHERIC VACUUM BREAKER

SYSTEM LIMITS


- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE: 200 PSI MAX. STATIC

SHIPPING WEIGHT

- * 9.0 LBS

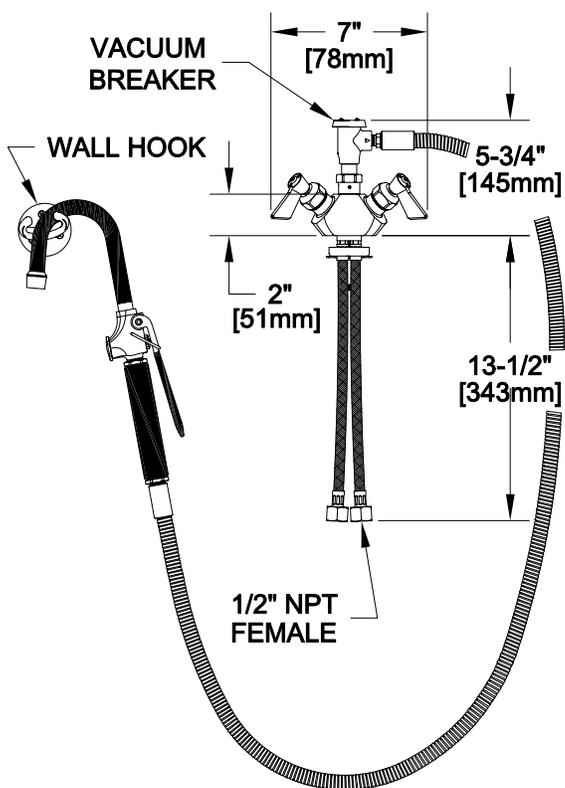

FOOTPRINT:

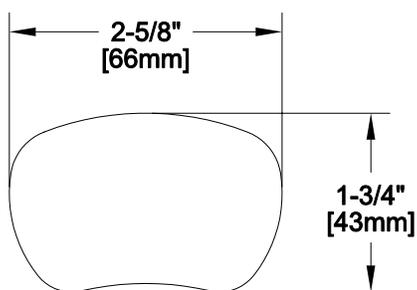

ROUGH-IN:

