

APPLICATION:

JOB NAME:

QUANTITY: ITEM NO.

PRODUCT NAME:

UTILITY SPRAY, DECK MOUNT

SPECIAL CONFIGURATION
CHECK BASE MODEL AND OPTIONS

MODEL:

2170

OPTIONS OR MODIFICATIONS:

SUPPLY LINES (24" OR 36") CIRCLE LENGTH

ADD-ON FAUCET (6",8",10",12",14",16") CIRCLE LGTH

IN-LINE DUAL CHECK VALVE

VANDAL RESISTANT KIT

HANDLES (CROSS OR WRIST) CIRCLE STYLE

PIPE HOOK

BRUSH

OTHER _____

FEATURES:

CONTROL VALVE

- * SINGLE DECK DUAL CONTROL
- * HOT SIDE STEM - RIGHT HAND
- * COLD SIDE STEM - LEFT HAND
- * SWIVELLING SEAT DISKS
- * STAINLESS STEEL SEATS
- * STAINNESS STEEL SEAT SCREWS
- * STAINLESS STEEL HANDLE SCREWS
- * FLEXIBLE INLET HOSES

HOSE

- * 60" LENGTH
- * STAINLESS STEEL END FITTINGS
- * STAINLESS STEEL EXTERNAL JACKET
- * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
- * REPAIRABLE IN FIELD WITH SIMPLE TOOLS

UTILITY SPRAY VALVE

- * NOZZLE THREADED INTO VALVE
- * 2.65 GPM AT 80 PSI
- * 45° ANGLED HEAD
- * SHOWER SPRAY PATTERN

SWIVEL ELBOW


- * 360° TURNING RADIUS

SYSTEM LIMITS


- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE 200 PSI MAX. STATIC

SHIPPING WEIGHT

- * 9.0 LBS

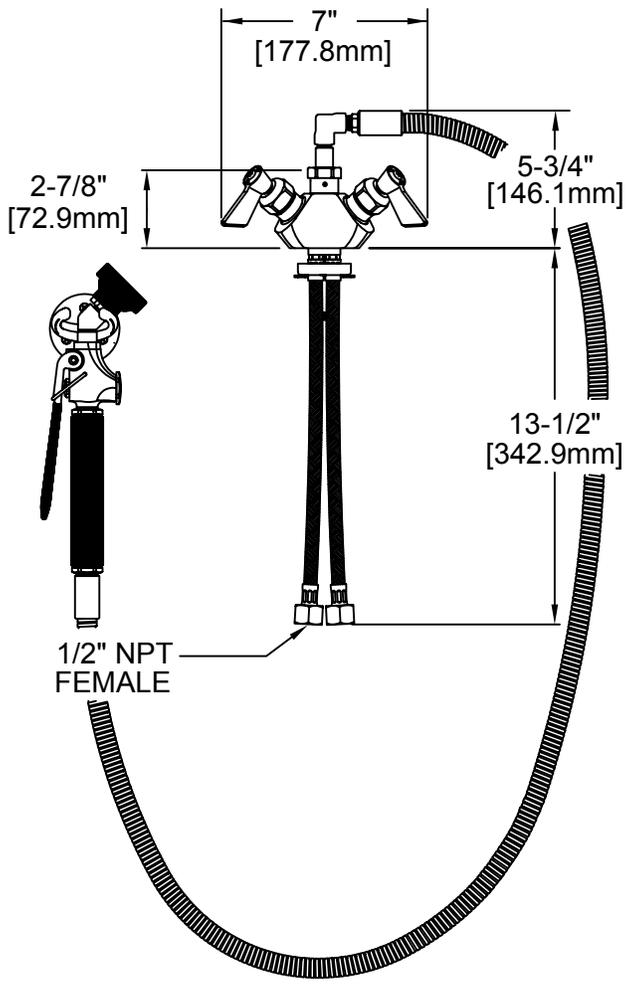

ROUGH-IN:



ANSI/A112.18.1M

FISHER

FISHER MANUFACTURING COMPANY
TOLL FREE: 800-421-6162 - FAX: 800-832-8238
information@fisher-mfg.com - www.fisher-mfg.com