

APPLICATION:


PRODUCT NAME:  
**POT FILLER HOSE STYLE  
 8" C/C ADJUSTABLE WALL MOUNT**

JOB NAME:

\_\_\_\_\_ SPECIAL CONFIGURATION  
 (CHECK BASE MODEL AND OPTIONS)  
 MODEL:  
 2250


QUANTITY:

ITEM NO.:

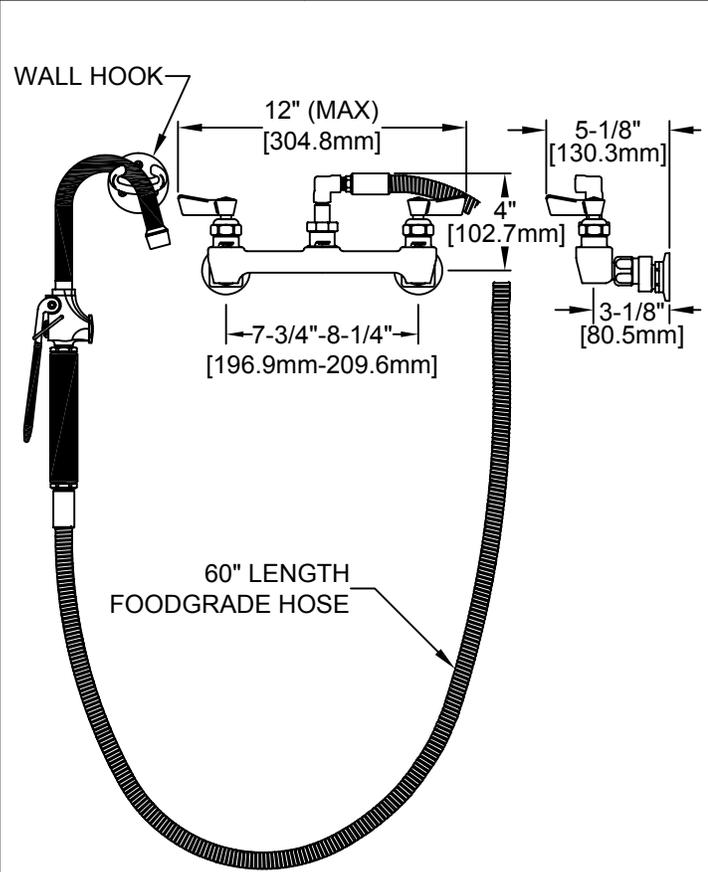

- OPTIONS OR MODIFICATIONS:
- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
  - ADD-ON FAUCET (6",8",10",12",14",16") CIRCLE LGTH
  - BACKFLOW PREVENTER
  - PIPE HOOK
  - NIPPLES
  - ELBOWS
  - VANDAL RESISTANT KIT
  - HANDLES (CROSS OR WRIST) CIRCLE STYLE
  - OTHER \_\_\_\_\_

ROUGH-IN:

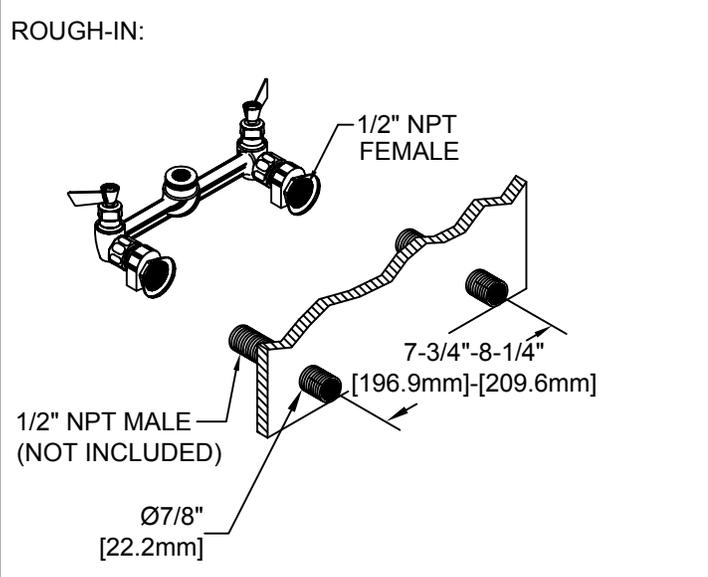

- FEATURES:
- CONTROL VALVE**
- \* 8" C/C ADJUSTABLE WALL MOUNT
  - \* ECCENTRICS ADJUST FROM 7-3/4" TO 8-1/4"
  - \* INTERNAL SPRING LOADED CHECK VALVES
  - \* SWIVELING SEAT DISKS
  - \* HOT SIDE STEM - RIGHT HAND
  - \* COLD SIDE STEM - LEFT HAND
  - \* STAINLESS STEEL SEATS
  - \* STAINLESS STEEL SEAT SCREWS
  - \* STAINLESS STEEL HANDLE SCREWS
- HOSE**
- \* 60" LENGTH
  - \* STAINLESS STEEL END FITTINGS
  - \* STAINLESS STEEL EXTERNAL JACKET
  - \* BRAIDED USDA APPROVED FOODGRADE INTERNAL HOSE
- POT FILLER VALVE**
- \* NON SCRATCHING/ MARRING TUBE
  - \* 5.00 GPM AT 80 PSI
  - \* AERATED STREAM
- SWIVEL ELBOW**
- \* 360° TURNING RADIUS
- SYSTEM LIMITS**
- \* TEMP: 40°F MIN. TO 140°F MAX.
  - \* PRESSURE 200 PSI MAX. STATIC
- SHIPPING WEIGHT**
- \* 9.0 LBS

ANSI/A112.18.1M, ANSI/NSF 61.9



**FISHER**  
 FISHER MANUFACTURING COMPANY  
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
 information@fisher-mfg.com - www.fisher-mfg.com