

APPLICATION:

PRODUCT NAME:

EXPOSED REEL RINSE WALL  
MOUNTED WITH SPRAY VALVE

JOB NAME:

SPECIAL CONFIGURATION  
 CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:

■ 2980

OPTIONS OR MODIFICATIONS:

BRUSH  
 OTHER \_\_\_\_\_

FEATURES

REEL

- \* SELF-LOCKING
- \* EXPOSED HOSE
- \* 35' LENGTH REEL HOSE
- \* 19" LENGTH INLET HOSE
- \* 3 PLY FIBER REINFORCED RUBBER HOSE
- \* ADJUSTABLE BALL STOP

PRO SPRAY VALVE


- \* NOZZLE THREADED INTO VALVE
- \* 2.65 GPM AT 80 PSI
- \* SHOWER SPRAY PATTERN

SYSTEM LIMITS

- \* TEMP: 40°F MIN. TO 140°F MAX.
- \* PRESSURE: 200 PSI MAX. STATIC


SHIPPING WEIGHT

- \* 34.0 LBS

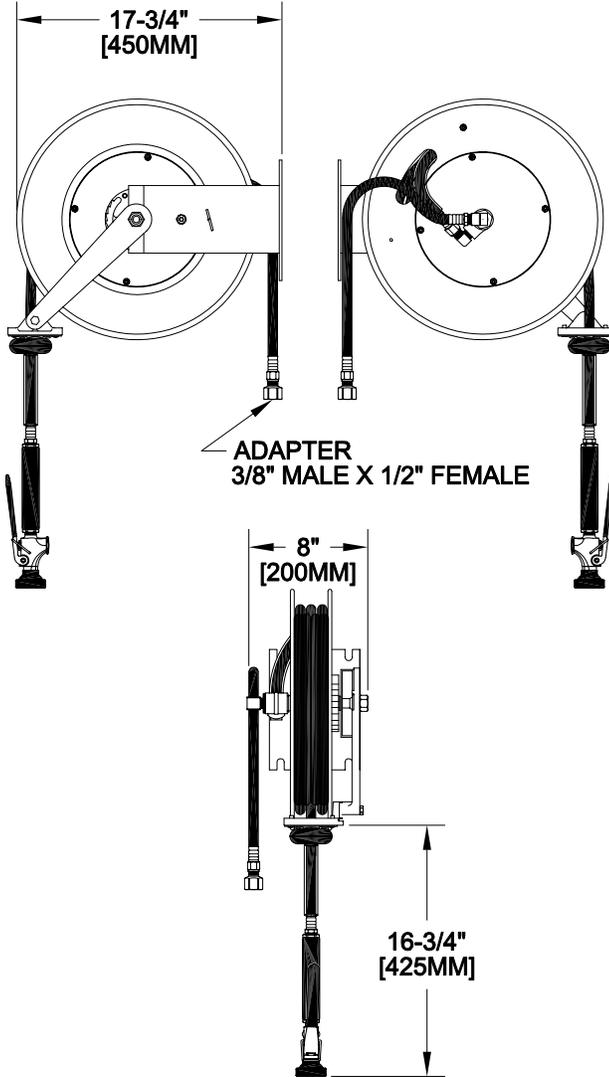

ADAPTER  
3/8" MALE X 1/2" FEMALE

ROUGH-IN: SEE MOUNTING PLATE BELOW

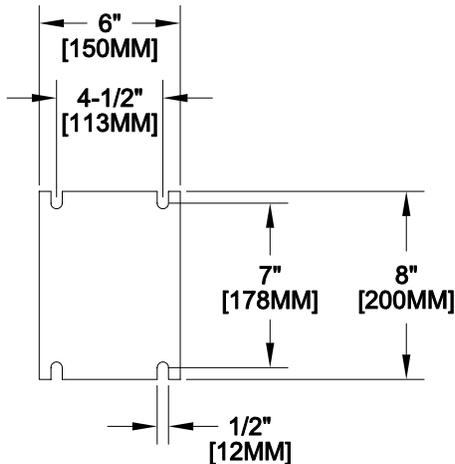

ANSI/A112.18.1M

# FISHER

FISHER MANUFACTURING COMPANY

TOLL FREE: 800-421-6162 - FAX: 800-832-8238

information@fisher-mfg.com - www.fisher-mfg.com