


APPLICATION:
 JOB NAME:
 QUANTITY: ITEM NO.:

PRODUCT NAME:
**STAINLESS STEEL REEL RINSE
 EXPOSED WITH SPRAY VALVE**


_____ SPECIAL CONFIGURATION
 (CHECK BASE MODEL AND OPTIONS)

MODEL:

29610 W/ 35' LENGTH HOSE
 29602 W/ 50' LENGTH HOSE

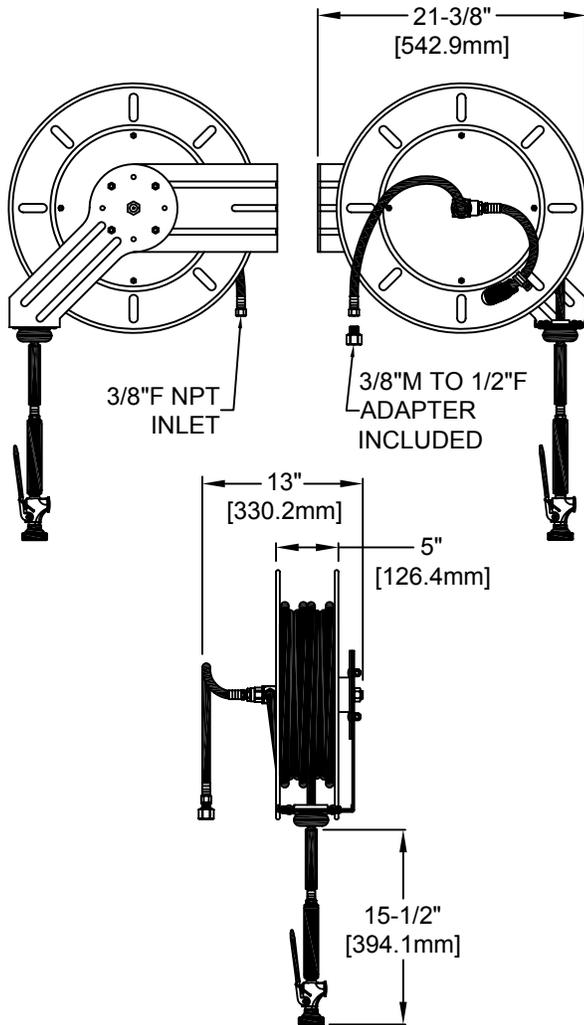

ROUGH-IN: SEE MOUNTING PLATE BELOW

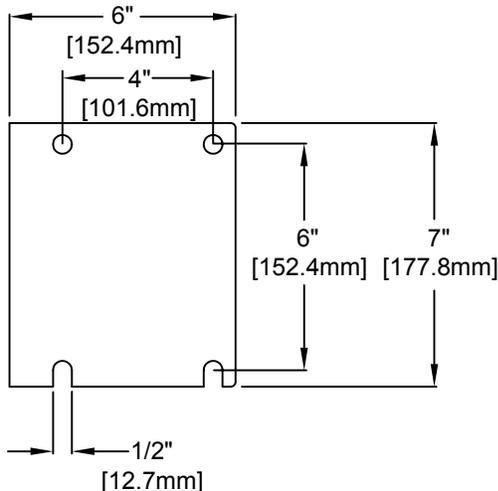

OPTIONS OR MODIFICATIONS:

BRUSH
 OTHER _____

FEATURES:

REEL RINSE

- * EXPOSED DESIGN
- * STAINLESS STEEL CONSTRUCTION
- * GUIDE ARM ADJUSTABLE TO 9 POSITIONS
- * RATCHED LOCK AND EASY TENSION ADJUST
- * STAINLESS STEEL OR BRASS FLUID PATH

HOSE

- * 35' OR 50' LENGTH REEL HOSE
- * 3/8" ID HIGH TEMPERATURE HOSE
- * 3-PLY FIBER REINFORCED
- * 1/2" F NPT OR 3/8" F NPT INLET
- * 18" LENGTH INLET HOSE
- * ADJUSTABLE BALL STOP

STANDARD PRO SPRAY VALVE

- * SOLID BRASS SHOWER HEAD - NO "O" RINGS TO LEAK
- * BRONZE HANDLE - NOT PLASTIC - MEANS FULL "ON"
- * FITS ALL BRANDS
- * 2.65 GPM AT 80 PSI
- * SHOWER SPRAY PATTERN

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE 150 PSI MAX. STATIC

SHIPPING WEIGHT

- * 29610 - 50.0 LBS
- * 29602 - 52.0 LBS