

Floor Mounted Electric Water Cooler



Model HCFO5 shall deliver 5 gph of 50°F water at 80°F inlet water and 90°F ambient (room) temperature.

Bubbler shall have flexible guard, lever handle, and built-in pressure regulator to deliver smooth steady flow at supply pressures of 20 to 120 psi. Basin shall be designed to eliminate splashing and standing water. Cabinet finish shall be Granite powder-coated paint on galvanized steel. Base shall be constructed of galvanized steel. Cooling system shall use R-134a refrigerant.

Shall be listed by Underwriters Laboratories, certified by Canadian Standard Association and conform to European Union Directives. Shall comply with ANSI/NSF 61.

Model HCFO5 Delivers 5 gph of chilled drinking water

Standard Features

Waterways are lead-free in materials and construction
Dial-A-Drink® Bubbler with flexible guard
Stainless steel top
Heavy-gauge steel cabinet with separate galvanized steel base
High-efficiency cooling tank and coil
Refrigerant R-134a

Finishes

Granite powder-coat paint

Accessories

Glass Filler (Factory Installed)

Components in this fountain are lead-free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.


Model: HCFO5
50°F Drinking Water
90°F Ambient Air Temperature
Rated Capacity gph: 5.0
Base Rate gph: 5.0
Pre-Cooler: No
115 Volts, 60 HZ
Full Load Amps: 3.3
Rated Watts: 280
Glass Filler Accessory Option: Yes
Net Wt. Approx.: 69 Lbs.
Rating Condition 80°F inlet water temperature

HCFO5



DISCLAIMER: Continued product improvements make specifications subject to change without notice. Check www.hawsco.com for the latest product information and updates.



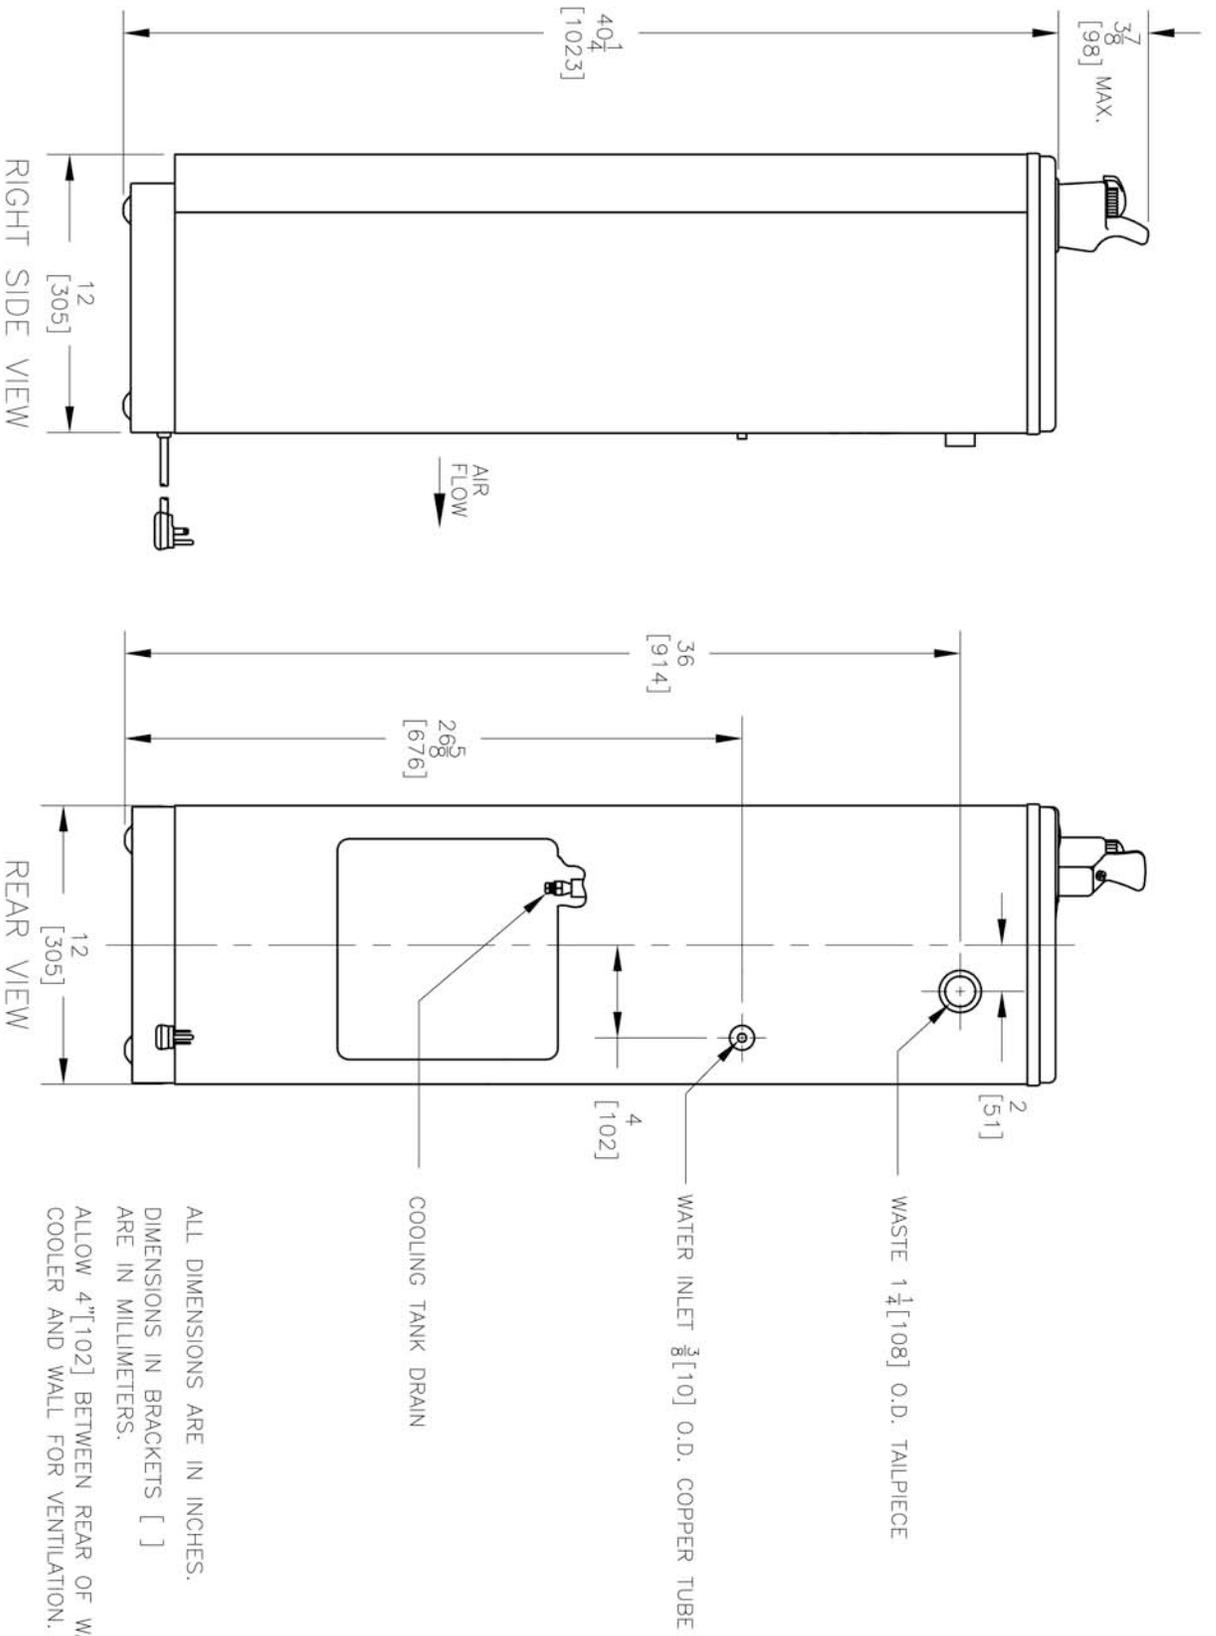


ALL DIMENSIONS ARE IN INCHES.
 DIMENSIONS IN BRACKETS []
 ARE IN MILLIMETERS.
 ALLOW 4" [102] BETWEEN REAR OF WATER
 COOLER AND WALL FOR VENTILATION.

COOLING TANK DRAIN

WATER INLET $\frac{3}{8}$ [10] O.D. COPPER TUBE

WASTE $1\frac{1}{4}$ [108] O.D. TAILPIECE



THIRD ANGLE PROJECTION
 ROUGHING-IN
 AND
 DIMENSIONAL DRAWING

MODEL HCF05



INTL FAX: 1-888-FAX-HARS D-888-329-4277
 1435 Knappe Ln, Spentz, NY, 89431
 Phone: 775-359-4712 Fax: 775-359-7424
 Harsco Ag Building 3 CH-3401 Burgdorf, Switzerland
 Harsco Pte Ltd 74 Sungei Kadat Loop Singapore 759531
 e-mail: harsco@harsco.com website: www.harsco.com