

Floor Mounted Electric Water Cooler



Model HFO8 shall deliver a minimum of 8 gph of water at 50°F water at 80°F inlet water at 90°F ambient (room temperature).

Bubbler shall have flexible guard, lever handle and built-in pressure regulator to deliver smooth steady flow at supply pressures of 20 to 120 psi. Basin shall be designed to eliminate splashing and standing water. Cabinet finish shall be Granite powder-coated paint on galvanized steel. Base shall be constructed of galvanized steel. Cooling system shall use R-134a refrigerant.

Shall be Listed by Underwriters Laboratories, certified by Canadian Standard Association and conform to European Union Directives. Shall comply with ANSI/NSF 61

Model HFO8 delivers 8 gph of chilled drinking water.

Standard Features

Waterways are lead-free in materials and construction
Dial-A-Drink Bubbler® with flexible guard
Stainless steel top
Heavy-gauge steel cabinet with separate galvanized steel base
High-efficiency cooling tank and coil
Refrigerant R-134a

Finishes

Granite powder-coat paint

Options (at additional charge)

Glass Filler (Factory Installed)

Components in this water cooler are lead-free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Model HFO8

50°F Drinking Water
90°F Ambient Air Temperature
Rating Condition 80°F inlet water temperature
Rated Capacity gph-8.0
Base Rate gph-8.0
Pre-Cooler: Yes
Hot'N Cold™ Model: No
115 Volts, 60 Hz
Compr. HP: 1/6
Full Load Amps: 4.6
Rated Watts: 370
Glassfiller Acc. Option: Yes
Net Wt Approx: 96 Lbs.




HFO8



DISCLAIMER: Continued product improvements make specifications subject to change without notice. Check www.hawsco.com for the latest product information and updates.




THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

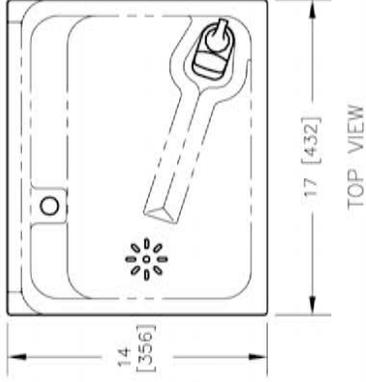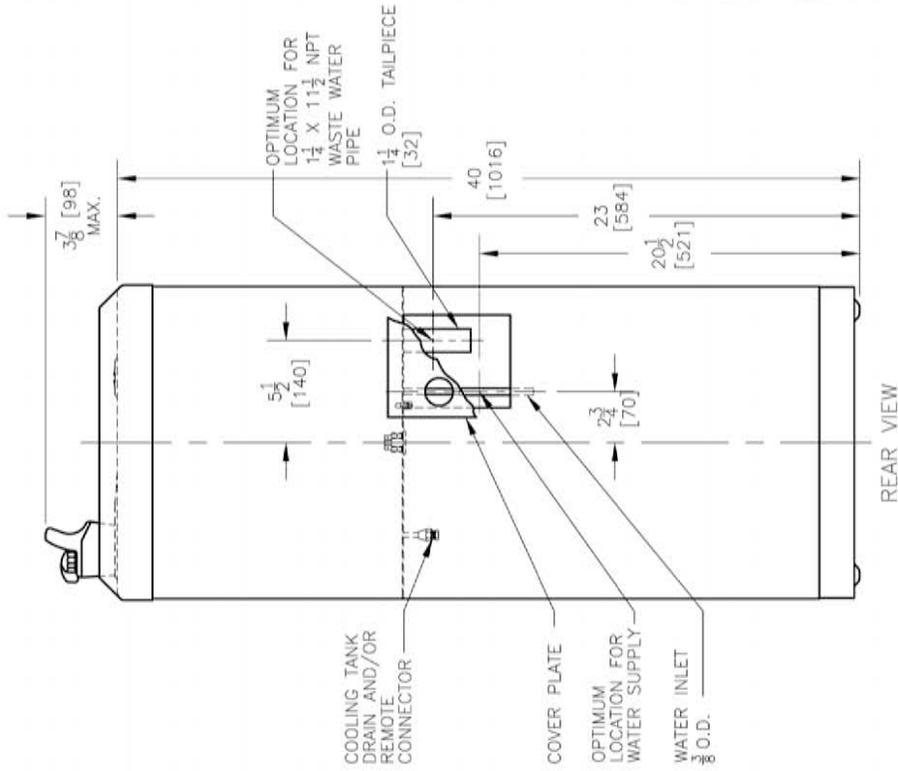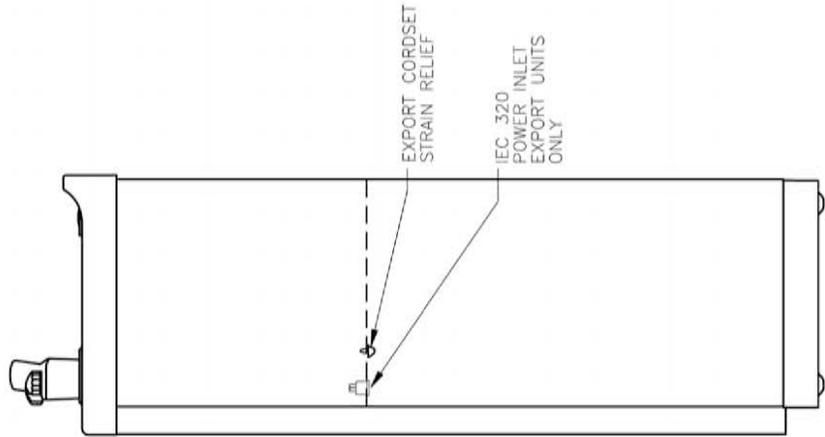

ALL DIMENSIONS ARE IN INCHES.
DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

ALLOW 4" [102] FOR VENTILATION IF WATER COOLER IS SET IN AN ALCOVE OR NEAR A CORNER.

THIRD ANGLE PROJECTION



ROUGHING-IN AND DIMENSIONAL DRAWING



MODEL HFO8

INFO FAX: 1-888-FAX-HAWS 01-888-329-4237
 1435 Kappa Ln, Sparks, NV, 89431
 Phone: 775-359-4712 Fax: 775-359-7164
 Haws AG, Buchweg 3 CH-3411 Burgdorf, Switzerland
 Haws Mfg Pte Ltd 74 Sungei Kadut Loop Singapore 729521
 e-mail: haws@haws.com website: www.haws.com