



# CONTEMPORARY DRINKING FOUNTAINS

## GS Series

### MODEL GSM55

BARRIER FREE, BI-LEVEL,  
PEDESTAL MOUNTED  
DRINKING FOUNTAIN

#### STANDARD FEATURES

- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- 11 gage, heavy duty welded steel, corrosion and scratch resistant finish
- Polished chrome plated brass, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Access door, heavy duty steel, vandal resistant

#### SUGGESTED SPECIFICATIONS

Model GSM55 is a barrier free pedestal mounted, vandal resistant, bi-level square drinking fountain made from 18 gage, 304 stainless steel bowls mounted into a green powder coated 11 gage, heavy duty galvanized welded steel pedestal. Unit shall be activated by front mounted self-closing buttons, by using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Bubblers shall be polished chrome plated brass with non-squirt features and operate on water pressure range of 20-105 psig. Unit shall adhere to ANSI A117.1 and Americans with Disabilities Act of 1990 frontal approach and protruding objects requirements, Adult ADA parallel and frontal approach and ANSI/NSF 61, Section 9.



□ Standard Model: GSM55

#### OPTIONAL ACCESSORIES

(additional costs may be incurred)

- - CH30 Child height, 30" bubbler height
- - FRU2 Freeze resistant valve (see separate submittal sheet)
- - FS Foot spray
- - HB1 Hose bibb, compression, with hose threaded outlet/VB
- - HB2 Hose bibb, loose key, with hose threaded outlet/VB
- - HB3 Hose bibb, loose key, vandal resistant, with hose threaded outlet/VB
- - IGM In-ground 14" mounting
- - JF1 Jug filler, plain end with self-closing valve
- - JF2 Jug filler, recessed, plain end with self-closing valve
- - NP2 Non-pollutable, freeze resistant valve
- - PF Pet fountain receptor
- "4" All stainless steel (Use model GSM54)
- "6" Firehouse red powder coated finish (Use model GSM56)
- "7" Alpine blue powder coated finish (Use model GSM57)

Custom color finishes available upon request

Please visit [www.murdock-supersecur.com](http://www.murdock-supersecur.com) for most current specifications.

Complies with the following standards:




**MURDOCK-SUPER SECUR** A Member of Acorn Engineering's Family of Companies  
15125 Proctor Avenue • City of Industry, CA 91746 USA • Phone 800-591-9880 or 626-333-2543 • Fax 626-855-4860



# CONTEMPORARY DRINKING FOUNTAINS

## GS Series

**MODEL GSM55**  
BARRIER FREE, BI-LEVEL,  
PEDESTAL MOUNTED  
DRINKING FOUNTAIN

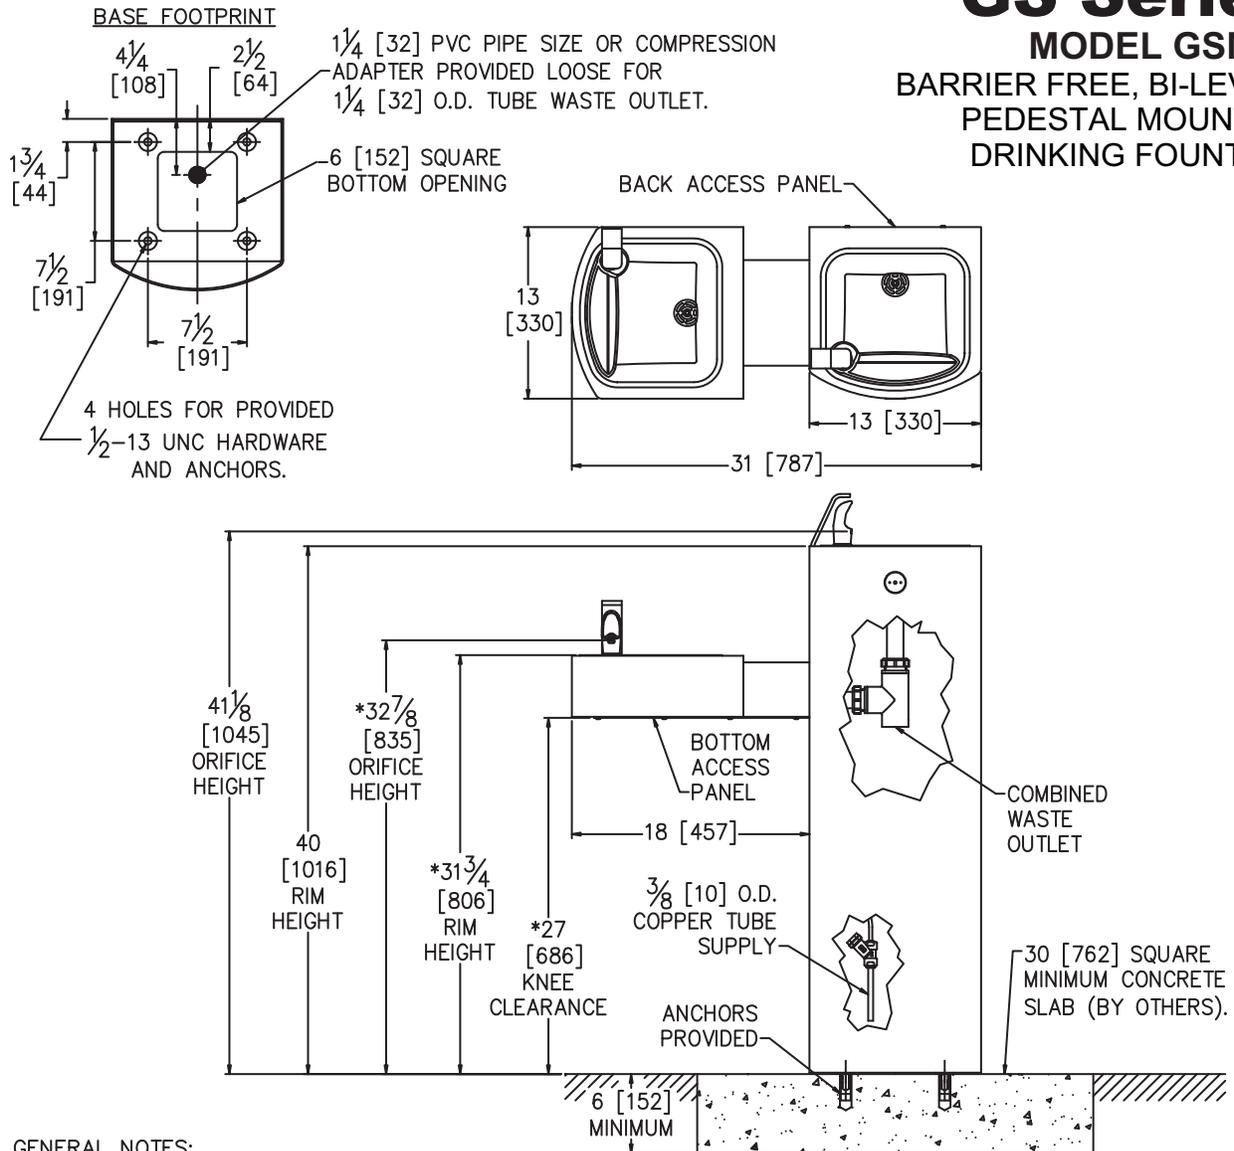

**GENERAL NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MM].
- \*2. STANDARD ADULT HEIGHT MODEL SHOWN. OPTIONAL -CH30 CHILD HEIGHT MODEL AVAILABLE.
3. STOP VALVE NOT PROVIDED.

**ONE YEAR LIMITED WARRANTY** - Parts are warranted for one (1) year from date of shipment.

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

All dimensions are nominal and subject to manufacturer's change without notice. Murdock-Super Secur assumes no responsibility for use of void or suspended data. © Copyright 2008, Murdock-Super Secur, a division of Acorn Engineering Company. Please visit [www.murdock-supersecur.com](http://www.murdock-supersecur.com) for most current specifications.

Model Numbers & Options \_\_\_\_\_ Quantity \_\_\_\_\_

Company \_\_\_\_\_ Date \_\_\_\_\_

Contact \_\_\_\_\_ Title \_\_\_\_\_

Approval for Manufacturing/Signature \_\_\_\_\_