MECHANICAL FAUCETS 782-VBCP

Sink Faucets

Product Type

Wall Mounted Concealed Hot and Cold Water Sink Faucet with Pail Hook and Vacuum Breaker

Features & Specifications

- 8" Fixed Centers
- 3" Cross Handle
- Slow Compression Operating Cartridge
- 1/2" NPT Female Thread Inlets
- 3/4" Male Hose Thread Outlet
- 8" Center to Center Integral Cast Vacuum Breaker Spout with Pail Hook and Wall Brace
- Atmospheric Vacuum Breaker, Not Intended for Continuous Pressure Applications

Performance Specification

- Rating Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140°F

Warranty

- Lifetime Limited Faucet Warranty
- 5-Year Limited Cartridge Warranty
- 1-Year Limited Finish Warranty

Codes & Standards

- ASME A112.18.1/CSA B125.1
- Certified to NSF/ANSI 61, Section 9 by CSA



| Job Name | |
|-----------------------|------------------------------|
| Item Number | |
| Section/Tag | |
| Model Specified | |
| Architect | |
| Engineer | |
| Contractor | |
| [] Submitted as Shown | [] Submitted with Variations |
| Date | |






2100 South Clearwater Drive Des Plaines, IL P: 847/803-5000 F: 847/803-5454 Technical: 800/TEC-TRUE www.chicagofaucets.com

782-VBCP Sink Faucets



Architect/Engineer Specification

Chicago Faucets No. 782-VBCP polished chrome plated solid brass construction. 8" center to center integral cast vacuum breaker spout with pail hook and wall brace. 3" metal cross handle(s) with eight point tapered broach and secured blue and red buttons. Slow compression rebuildable cartridge, opens and closes 360° for fine adjustment, closes with water pressure, features square tapered stem. Integral inlet shank(s) contains standard 1/2" NPT female thread inlets. 3/4" male hose thread outlet. Mounting hardware included. This product is tested and certified to industry standards: ASME A112.18.1/CSA B125.1, and Certified to NSF/ANSI 61, Section 9 by CSA.

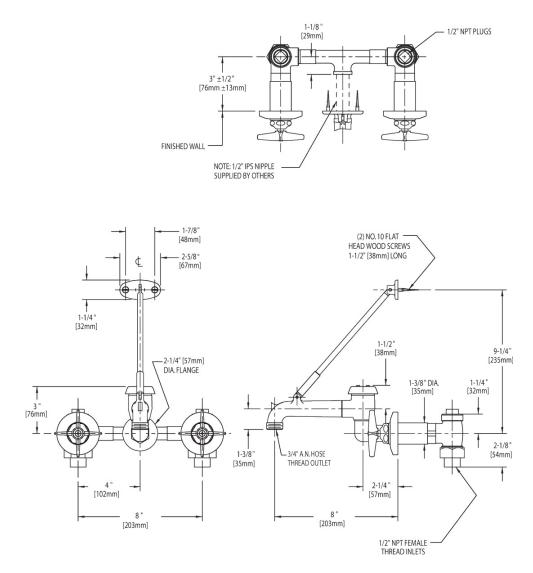

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive Des Plaines, IL P: 847/803-5000 F: 847/803-5454 Technical: 800/TEC-TRUE www.chicagofaucets.com

Last Revision: 07/25/2011 • Date Printed: 08/26/2011 • Product specifications subject to change without notice