

Shower System 1-100 Specification Submittal

Feature Highlights

- Symmons shower system with Symmons Safetymix pressure balancing mixing valve and lever style handle. Valve includes adjustable stop screw to limit handle turn.
- Super showerhead #4-231, single mode with adjustable flood or mist spray.
- Showerhead arm and flange.
- Standard flow rate 2.5 gpm (9.5 L/min) Optional lower flow rate restrictor available 🥒

Polished chrome finish

Model Numbers

П 1-100 Shower System with Symmons Safetymix pressure balancing mixing valve

Finish Options

Append appropriate -suffix to model number.

- Polished chrome finish (standard)

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05 Shower system lever handle is ADA compliant

Warranty

- Limited Lifetime to the original end purchaser in residential/consumer installations.
- 5 years for commercial installations





Options / Modifications

П

П


Append appropriate -suffix to model number.

-X Symmons Safetymix pressure balancing mixing valve includes integral service stops to allow water shut-off for service -3/4 3/4" valve to increase flow approximately 20% -X-REV Reverse coring, hot on right, cold on left, for back to back installations with integral stops only. -X-CHKS Integral check stops—for use in installations where a positive shut-off device is used downstream of mixing valve -E Showerhead #4-221 (showerhead П #4-231 with external volume control) -2.0 2.0 gpm (7.6 L/min) flow rate restrictor (not available with -E option, external volume control on showerhead) -1.5 1.5 gpm (5.7 L/min) flow rate restrictor П -L/HD Showerhead not included -BX Back connection, integral stops -VP Showerhead is vandal resistant П

-NU NU-Arm showerhead bracket in place

of #300 standard arm and flange.

-G Dial termometer

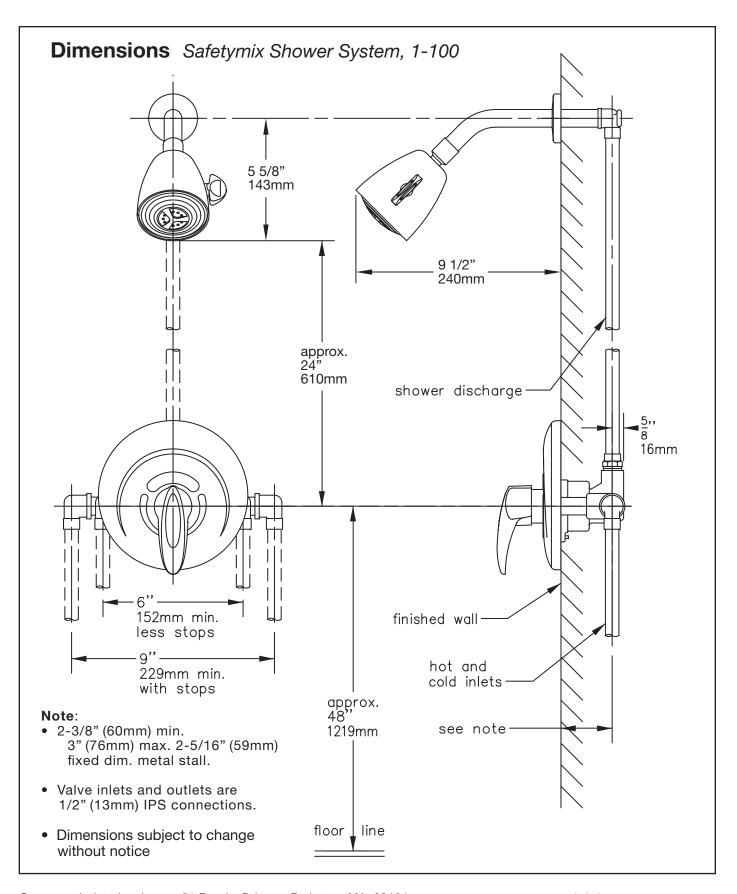

Symmons Industries, Inc. = 31 Brooks Drive = Braintree, MA 02184 (800) 796-6667, (781) 848-2250 = Fax (800) 961-9621, (781) 664-1300 Website: www.symmons.com = Email: customerservice@symmons.com

