

S-3552
S-3562-LD



Single Lever Faucet

GENERAL SPECIFICATION

Polished chrome plated, NSF compliant, 4" centerset single lever faucet. All metal shell and belly plate. Ceramic cartridge. Water conserving aerator reduces flow to 2.2 gpm/8.4 lpm. Copper tube inlets with 1/2" NPSM compression threads. Meets ASME A112.18.1/CSA B125.1 and NSF 61 standards.

☐ **S-3552**

4" centerset single lever faucet with 1-1/4" pop-up drain.

☐ **S-3562-LD**

4" centerset single lever faucet. No drain assembly.

OPTIONS


SUFFIX	DESCRIPTION
☐ BO	0.5 gpm flow control, vandal-resistant
☐ CA	No lead for CA AB1953 compliance
☐ GB	1.5 gpm flow control, vandal-resistant
☐ LF	2.2 gpm laminar flow control outlet, vandal resistant
☐ VR	2.2 aerated flow control, vandal-resistant

This space for Architect/Engineer approval.




Rough-Ins


S-3552

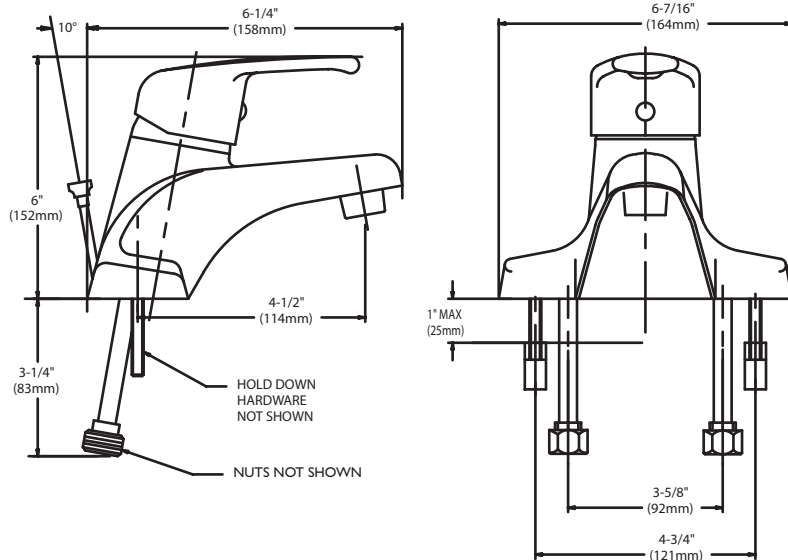


Pop-Up Drain

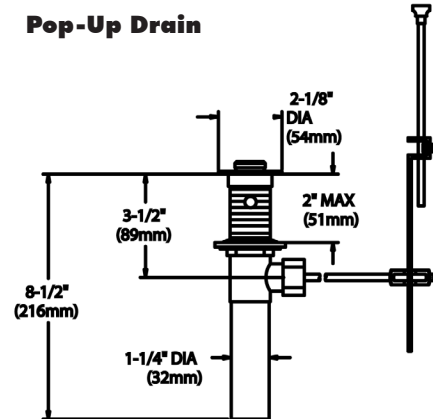

S-3562-LD

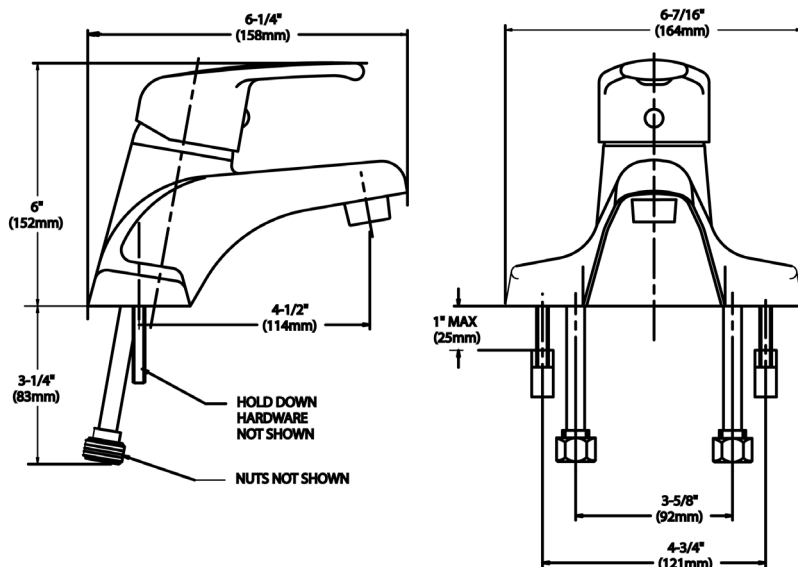

S-3552 S-3562-LD

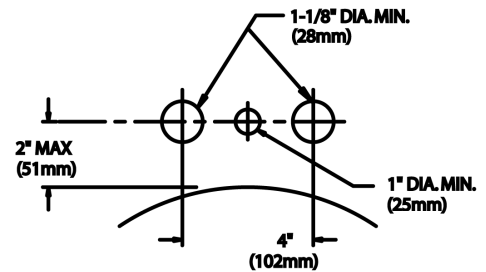

NOTE: All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. Lavatory inlets are sized for coupling connections. Unless otherwise specified, all inlets are 1/2" NPSM.