


Z6912-GEN

Lavatory Faucet with Hydroelectric Generator



Shown with -CP4 option

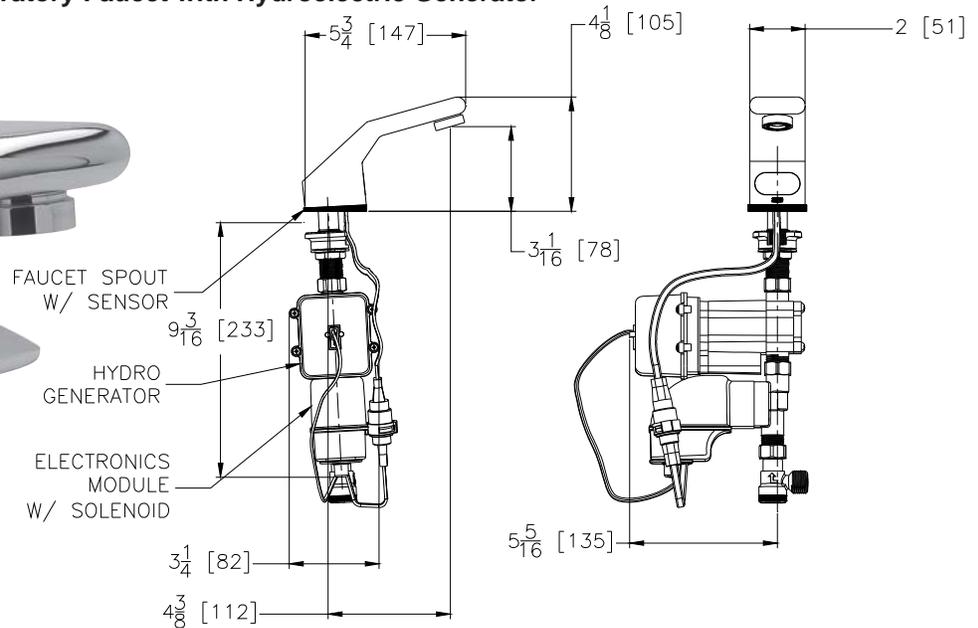

Flow Control Options

- J 1.5 gpm/ 5.7 Lpm Vandal-Resistant Laminar Flow
- K 1.0 gpm/ 3.8 Lpm Vandal-Resistant Laminar Flow
- L 1.0 gpm/ 3.8 Lpm Vandal-Resistant Aerator

Accessories

- ADM Above Deck Mixer *
- ADM-1 Above Deck Mixer w/4" Cover Plate *
- ADM-2 Above Deck Mixer w/8" Cover Plate *
- CP4 Cover Plate 4"[102] Centers
- CP8 Cover Plate 8"[203] Centers
- H4 Wrist Blade Handle for ADM *
- MT Mixing Tee *
- MV Temperature Mixing Valve
- SH Supply Hoses for Mixing Valve
- TMV Thermostatic Mixing Valve for Multiple Faucets
- TMV-1 Thermostatic Mixing Valve for Single Faucets
- _____ Other

* Option not available for -XL faucets

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION
 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
 Phone: 1-800-997-3876 ♦ Fax: 919-775-3541
 www.zurn.com
 In Canada: ZURN INDUSTRIES LIMITED
 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2
 Phone: 905-405-8272 Fax: 905-405-1292

AquaVantage® is a registered trademark of Zurn Industries, LLC.

Engineering Specification

ADA compliant, chrome plated sensor faucet for retrofit and new construction.

- Flow Rate
 - 1.5 gpm Vandal Resistant Aerator (0.25 gal per 10 sec. cycle)
- Occupant Detection
 - Infrared convergence-type proximity sensor
 - Thirty Second Time out feature
- Power Supply
 - Self Sustaining Hydroelectric Generator
 - Approximately 10 years (1.5 gpm)/5 years (1.0 gpm)
- Spout module
 - Chrome Plated Cast Brass
- Also Includes
 - In-line filter
 - Inlet for a 1/2"[13] ball riser
 - Single supply hose
- XL Zurn Lead Compliant products (-XL) are manufactured to comply with state laws and local codes that mandate lead content levels less than one quarter of one percent (0.25%) total lead content by weighted average.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.
 Please contact Zurn for most up to date information.