

TEMP-GARD III SHOWER UNIT


Z7300-SSC-HW6-MT

TAG



ENGINEERING SPECIFICATIONS: ZURN Z7300-SSC-HW6-MT

Single handle pressure balancing mixing tub and shower unit, ceramic control cartridge with stainless steel balancing piston, built in reverse connection capability (To reverse the hot and cold inlets simply remove cartridge and turn 180°), two service stops / check stops, and adjustable limit stop. When valve is turned on it must rotate from cold through to the hot position. All exposed trim and handle are metal with polished nickel chrome plated surface. Valve supplied with standard hand/wall shower head, hand/wall unit, 60"[1524mm] flexible metal hose 24"[610mm] mounting bar, vacuum breaker, supply elbow and flange. The valve inlets, shower and tub outlet are 1/2" female copper sweat connections.

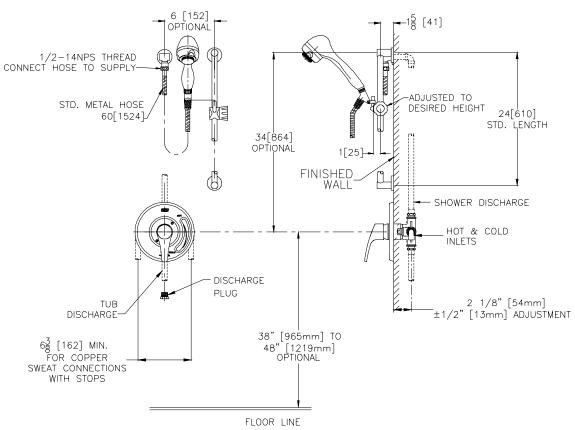

Note: All dimensions are for reference only. Do not use for pre-plumbing. Parts shown as hidden lines are supplied by others.

OPTIONS (Check/specify appropriate options) Use with Z7300 prefix

OF 11013 (Check specify appropriate options) ose with 27300 prefix		STANDARDS
Suffix	Description Extension Kit, Extends Valve Out by 1". Sierra Series Decorative Metal Trim Wall Mounting Flange For Fiberglass or Panel Wall Installation	Tested to meet the following standards for valves and plumbing fittings: ASSE Standard No. 1016
	Handwall Options (see Z7000-HW)	ASME A112.18.1 / CSA B125.1 IAPMO [®] Listed
Additional Options		Meets or Exceeds ANSI A117.1M standard
Z7000	O-SC Pair of Dual Spring Check Valves	for physically handicapped



CTANDADDC



Product No. Z7300-SSC-HW6-MT



ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

Dwg. No. 92657