

SPEAKMAN®

SE-625

COMBINATION SHOWER & EYE/FACE WASH

DESCRIPTION

The SE-625 Safe-T-Zone® features the SE-490 eye/face wash with dual spray outlets, flip-top dust covers and stainless steel bowl combined on a stainless steel stanchion with an impeller action deluge showerhead which is activated by a stainless steel pull rod.

SPECIFICATIONS

Showerhead: 8" diameter stainless steel

Flow Control: Internal 20 gpm regulator

Valve: 1" NPT female stainless steel.

Full flow stay open ball valve

Activator: Stainless steel triangular pull rod

Stanchion: 1½" stainless steel, 18 gauge tubing

Inlet & Waste: 1¼" NPT male

Performance: 20 gpm @ 30 psi

Finish: Stainless steel

EYE/FACE WASH: SE-490

Bowl: 300 series stainless steel

Spray Heads: (2) yellow ABS plastic spray outlets with flip-top dust caps

Valve: ½" NPT female stainless steel


full flow stay open ball valve

Activator: Stainless steel push handle

Performance: 3.8 gpm @ 30 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

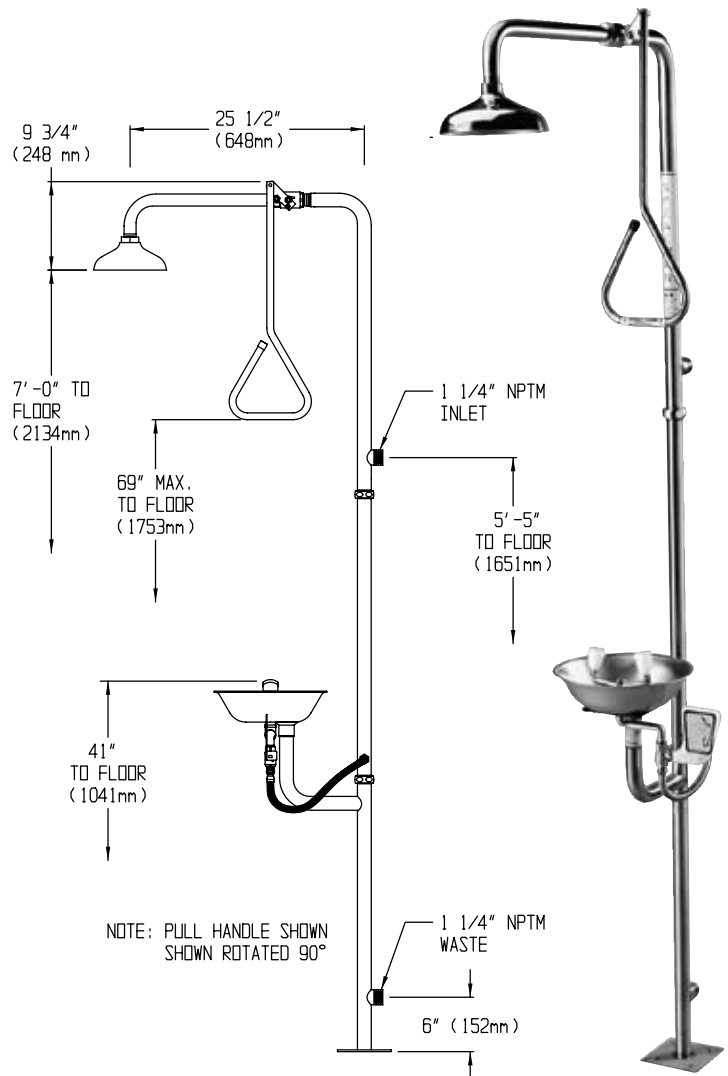

OPTIONS

- FLW Flow switch
- FPV Freeze protection valve
- HFO Hand/Foot operation
- HS Hand-held spray
- PSS Polished stainless steel finish
- SPV Scald protection valve
- TS Top supply

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____