

Feature Highlights

- Symmons shower system with a lever handle.
- Symmons Safetymix pressure balancing 3-port #4-500 mixing valve with adjustable stop screw to limit handle turn.
- Senior showerhead #4-150 with semi adjustable flood or mist spray
- Standard flow rate 2.5 gpm (9.5 L/min) Optional lower flow rate restrictor available 🍼
- Spray face is non-clogging and non-removable
- Mounting fasteners for showerhead are vandal resistant recessed hex socket type
- Polished chrome finish

Model Numbers

1-100-150 Shower System with Symmons П Safetymix #4-500 pressure balancing mixing valve and showerhead #4-150

Finish Options

Append appropriate -suffix to model number.

- Polished chrome finish (standard)

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime to the original end purchaser in residential/consumer installations.
- 5 years for commercial installations








Options / Modifications

Append appropriate -suffix to model number.		
	-X	Symmons Safetymix pressure balancing mixing valve includes integral service stops to allow water shut-off for service
	-X-3/4	3/4" valve, increases flow approximately 20%
	-X-REV	Reverse coring, hot on right, cold on left, for back to back installations with integral stops only.
	-CHKS	Integral Check Stops. Temptrol valve includes check stops. Note: Requires integral service stop option (-X) Used in installations where a positive shut-off device is used downstream of mixing valve.
	-BX	Back connection, integral stops
	- 2.0	2.0 gpm (7.6 L/min) flow rate restrictor
	-1 .5	1.5 gpm (5.7 L/min) flow rate restrictor
	-VP	Vandal resistant escutcheon screws
	-G	Dial thermometer
	-15	Showerhead with space saving 15 degree spray angle
	-BB	Back plate and thru bolts for Senior showerhead to accomodate extra thick wall up to 6 inches. Specify dimension for thicker wall. Enter dimension:

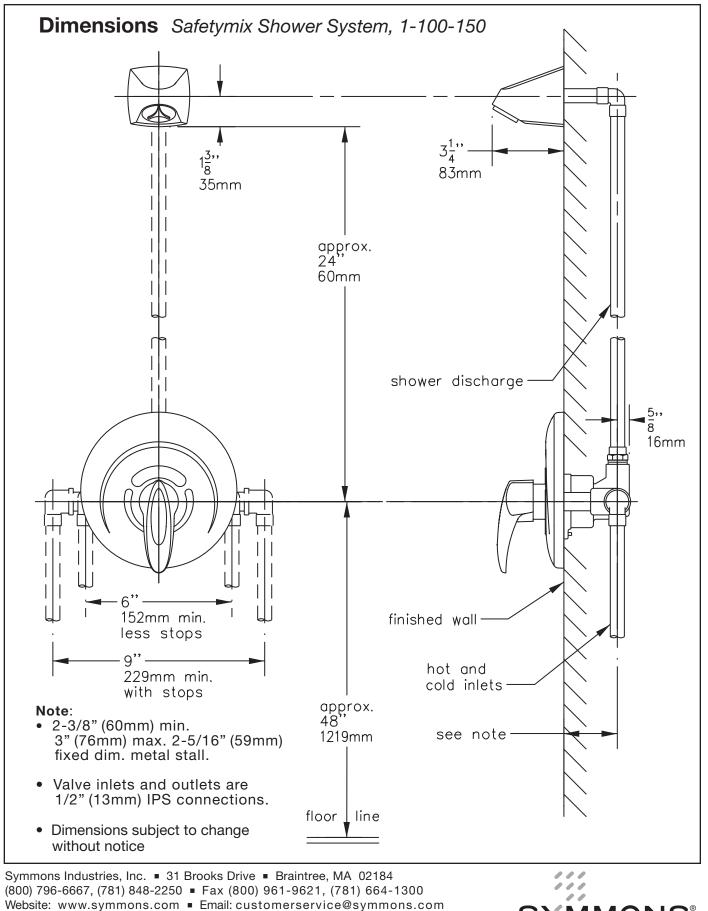

©2010 Symmons Industries, Inc. Printed in U.S.A.

082510



S