

TEMP-GARD SHOWER UNIT


Z7121-SS-LH-DV2P-HW

TAG

ENGINEERING SPECIFICATIONS: ZURN Z121-SS-LH-DV2P-HW

Single handle pressure balancing mixing shower unit with volume control, single bronze stem, stainless steel balancing piston integral with stem assembly, metal lever handle, integral service stops and brass adjustment limit stop screw in cap. Complete with double seal packing, adjustable brass packing nut, and removable brass seats; all exposed trim with polished nickel chrome plated surface. Valve supplied with two-way brass diverter valve, hand-wall shower head, 60"[1524mm] flexible metal hose, 24"[610mm] mounting slide bar wall connection, standard shower head, arm & wall flanges. The valve inlets, and shower outlet, are 1/2" female

copper sweat connections.

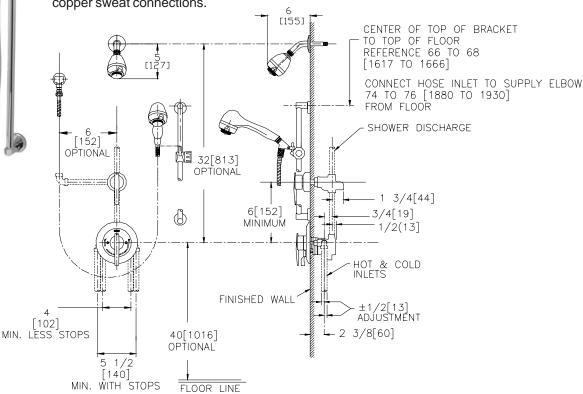

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONS (Check/specify appropriate options) *Use with Z7000 prefix*

ABS Chrome Plated Handle with Screw and Button

Wall Mounting Flange For Fiberglass or Panel Wall Installation

BC	Back Connections (1/2") (for 90° Installations), Shipped as Loose Adaptors, to be Installed in the Field	Tested to meet the following standards for valves and plumbing fittings:
CC	Conversion Cover Plate	ASSE Standard No. 1016
DT	Dial Thermometer	CSA Standard B125-M89
IP	1/2" Female Threaded Connections, Shipped as Loose	Shower heads meet ANSI A112.18.1
	Adaptors, to be Installed in the Field	Meets or Exceeds ANSI A117.1M standard
MT	Metal Cover, Escutcheon, & Stem Handle	for physically handicapped
QD	Quick Disconnect In-Line Hose Connector	
RC	Reverse Connections (For Back to Back Installation)	
-SC	Pair of Dual Spring Check Valves	

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292 C.N. No. 107824

STANDARDS

In-line Vacuum Breaker

-STH

-VB

-WF