

## SENTINEL MARK II®

**SM-4480-ADA**



**SM-4481-ADA**



## Shower Combination

### GENERAL SPECIFICATION

Versatile shower system includes Sentinel Mark II® concealed anti-scald balanced pressure valve with integral volume control/diverter and integral stop and hand held spray combination. Chrome plated brass wall plate with metal index. Chrome plated brass lever handle. Independent center sleeve allows up to 1" of rough-in variation. Adjustable temperature limit stop. Brass body. Pressure balancing & ceramic temperature regulating cartridge with built-in check stops. Ceramic temperature regulating module. Can be installed back-to-back. Roughing-in template.

Four port valve with 1/2" female copper sweat inlets and outlet. 1/2" female NPT tub outlet. Chrome plated arm mount bracket. S-2500 shower arm and wall flange. 60" metal hose, chrome finish. In-line vacuum breaker. 24" combination slide bar and grab bar, stainless steel and chrome, with mounting screws. VS-100 handshower with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum, to exceed existing ASME A112.18.1/CSA B125.1 standard. Non-positive shut-off meets ICC/ANSI A117.1 SEC. 608.6 and ADAAG. Meets ASSE 1016 standard.

### **SM-4480-ADA**

Anti-scald shower and bath with decorative etched metal index.

### **SM-4481-ADA**

Anti-scald shower and bath with decorative etched metal index and Revere handle.

### OPTIONS

SUFFIX	DESCRIPTION
--------	-------------


<input type="checkbox"/> PC	VS-100-PC handheld shower, chrome finish
-----------------------------	--

This space for Architect/Engineer approval.



## Rough-Ins

**SM-4480-ADA\SM-4481-ADA**

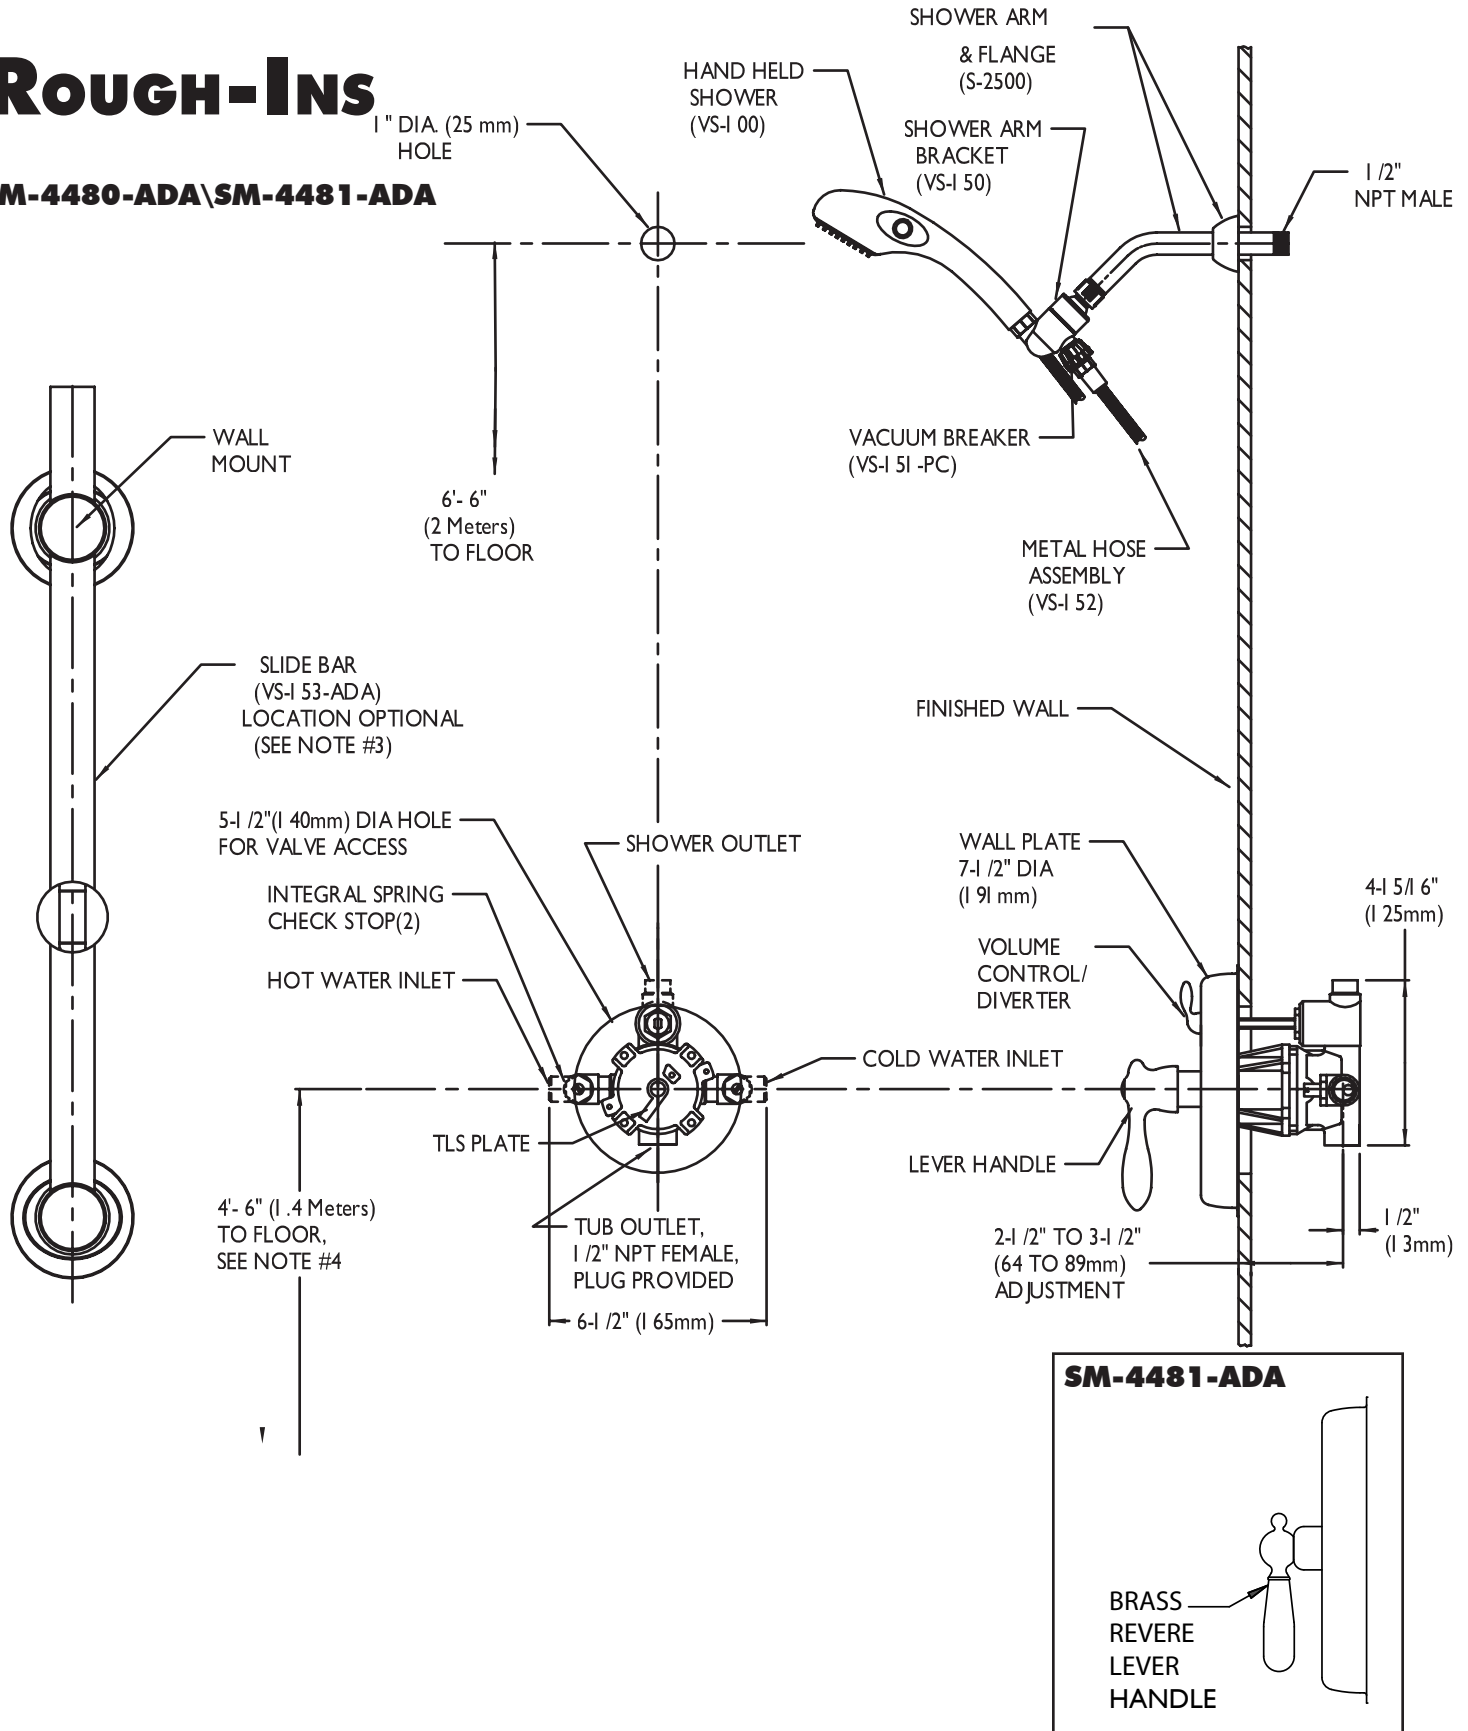

NOTE: 1. Unless otherwise specified, all dimensions are in inches (millimeters) and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are 1/2" female copper sweat. 3. For ADA mounting locations consult ADAAG, ANSI A117.1, or state regulations.