## Safety Stations with WideArea™ Eye/Face Wash



## G1994HFC Safety Station with WideArea™ Eye/Face Wash, Hand and Foot Control, All-Stainless Steel

**APPLICATION:** All-stainless steel combination WideArea<sup>™</sup> eye/face wash and shower safety station. Stainless steel construction is ideal for highly corrosive environments and clean room applications. Eye/face wash is activated by flag handle or foot treadle. Four GS-Plus<sup>™</sup> spray-type outlet heads deliver a flood of water over a wide area of coverage for complete rinsing of eyes and face.

**SHOWER HEAD:** 10" diameter stainless steel.

**SHOWER VALVE:** 1" IPS Type 316 stainless steel stay-open ball valve. Valve has stainless steel ball and Teflon® seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

**SPRAY HEAD ASSEMBLY:** Four GS-Plus<sup>™</sup> spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from the water flow.

**EYE/FACE WASH BOWL:** 11 1/2" diameter stainless steel.

EYE/FACE WASH VALVE: 1/2" IPS Type 316 stainless steel stayopen ball valve. Valve has stainless steel ball and Teflon<sup>®</sup> seals. Valve is activated by flag handle or foot treadle. Unit remains in operation until handle is returned to closed position.

**PIPE AND FITTINGS:** Schedule 40 Type 304 brushed stainless steel. Furnished with orange polyethylene covers for vertical piping for high visibility.

**SUPPLY:** 1 1/4" NPT female top or side inlet.

WASTE: 1 1/4" NPT female outlet.

SIGN: Furnished with ANSI-compliant identification sign.

**QUALITY ASSURANCE:** Valve and spray head assemblies are factory assembled and water tested prior to shipment.

## **Available Options**

- **BC** Stainless steel cover for eye/face wash bowl.
- **FC20** Regulates shower flow rate to 20 GPM.
- AP275-100 Electric Light and Alarm Horn Light and alarm horn summon assistance when eye/face wash or shower is activated.

## AP250-015 MODESTY CURTAIN Modesty curtain for mounting on safety station.

**TMV** G<sub>3</sub>800 thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2004.






Guardian Equipment 1140 N North Branch St. 312 447 8101 FACSIMILE Chicago, IL 60622

312 447 8100 TELEPHONE gesafety.com



**G1994HFC** Safety Station with WideArea™ Eye/Face Wash, Hand and Foot Control, All-Stainless Steel

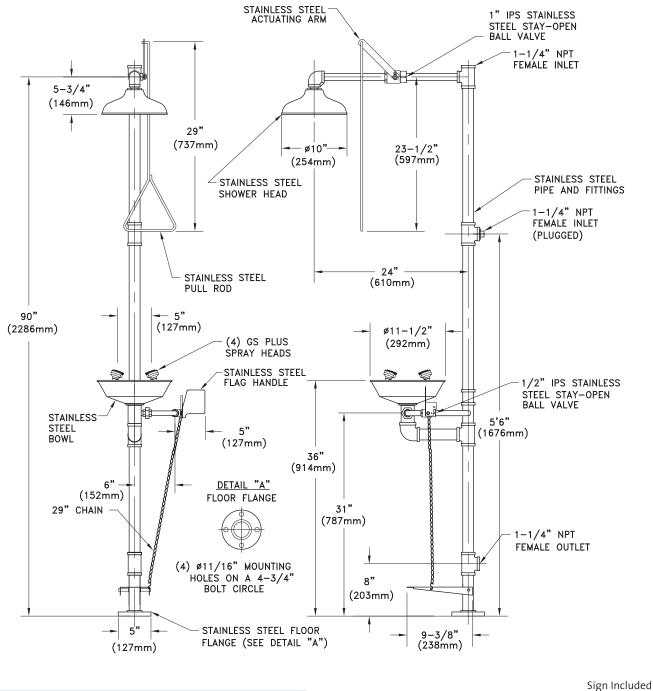



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm$  1/4" (6mm). rev. 0308

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL