

## 952-1/2CP

Wall Mounted Service Sink Faucet with Atmospheric Vacuum Breaker Spout

### PRODUCT TYPE

Wall mounted service sink faucet with atmospheric vacuum breaker spout

### FEATURES & SPECIFICATIONS

- Polished chrome plated finish
- Solid brass body construction
- Atmospheric vacuum breaker rigid spout
- 3/4" Male garden hose thread outlet
- 2 1/4" tee handle, catalog #293-6
- Slow compression renewable cartridge that closes with water pressure with tapered square broach to facilitate handle removal, catalog #217-XTLH
- 1/2" NPT female inlet
- Mounting hardware included
- Cap available for loose key applications

### PERFORMANCE SPECIFICATION

- Rated Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140° F

### WARRANTY

- Lifetime Limited Faucet Warranty
- 5-Year Limited Cartridge Warranty
- 1-Year Limited Finish Warranty

### COMPLIANT TO

- ASME A112.18.1
- CSA B125

Job Name	_____
Item Number	_____
Section/Tag	_____
Model Specified	_____
Architect	_____
Engineer	_____
Contractor	_____
<input type="checkbox"/> Submitted as Shown	<input type="checkbox"/> Submitted with Variations
Date	_____




# 952-1/2CP

Wall Mounted Service Sink Faucet with  
Atmospheric Vacuum Breaker Spout



## ARCHITECT/ENGINEER SPECIFICATION

Chicago Faucets No. 952-1/2CP, Polished chrome plated solid cast brass construction. Atmospheric vacuum breaker rigid spout with 3/4" male garden hose thread outlet. 2 1/4" key handle with tapered square broach. Slow compression renewable cartridge designed to close with water pressure with square tapered broach feature to help facilitate handle removal. 1/2" NPT female inlet. Mounting hardware included. This product is tested and certified to ASME A112.18.1 and CSA B125 industry standards.

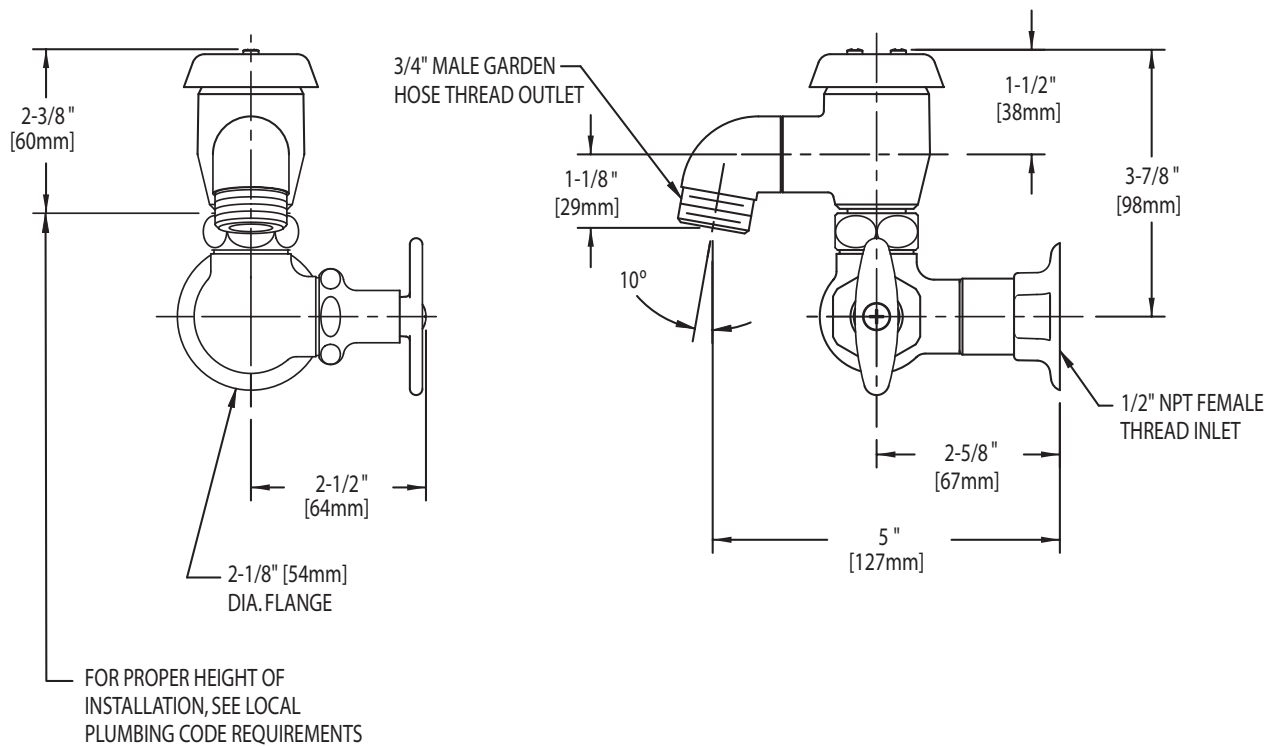

## OPERATION AND MAINTENANCE

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning this product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at [www.chicagofaucets.com](http://www.chicagofaucets.com).

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive  
Des Plaines, IL 60018  
P: 847/803-5000  
F: 847/803-5454  
Technical: 800/TEC-TRUE  
[www.chicagofaucets.com](http://www.chicagofaucets.com)