




Concealed Z6154AV Model with Exposed Back Spud Connection for Water Closets

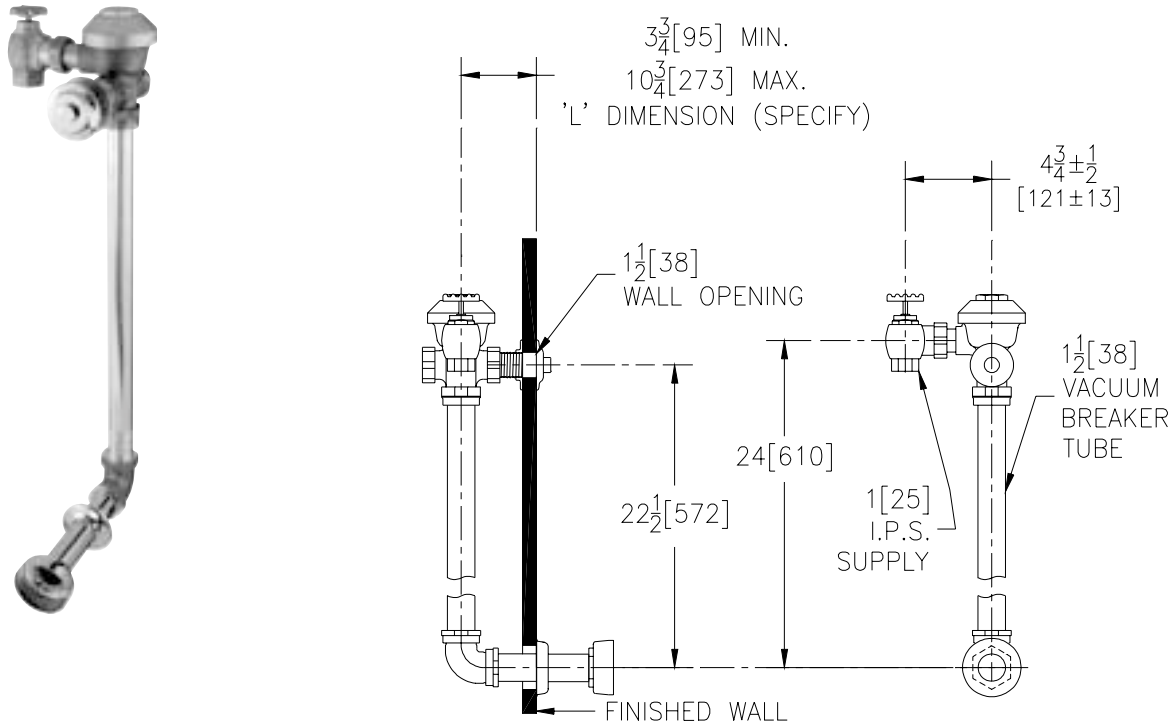

Flow Options

☐	-WS1	1.6 Gal. Low Consumption
☐	-FF	4.5 Gal. Full Flush
☐	Standard Flush	3.5 Gallons Per Flush

Suffix Options (Check/Specify Appropriate Options)

_____	-BG	BioCare Handle
_____	-J	Metal Oscilating ADA Handle
_____	-L3	3" [76] Metal Push Button
_____		Other

ENGINEERING SPECIFICATION: ZURN Z6154AV AquaVantage® 'AV' Concealed Closet Flush Valve - Concealed, quiet diaphragm-type rough brass flushometer valve with Zurn's AquaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered by-pass. The valve is complete with a non-hold open and no leak push button feature, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for back spud connection. Control stop has internal siphon-guard protection, and a sweat solder kit. Internal seals are made of chloramine resistant materials.

This space is for Architectural/engineering Approval