SPEAKMAN[®]

Sentinel Mark II®



S-1590-AF

Exposed Anti-Scald Balanced Pressure Showerpac[®] &

GENERAL SPECIFICATION

Sentinel Mark II exposed anti-scald balanced pressure Showerpac. 18 gauge stainless steel outer shielding. Stainless steel self-draining soap dish. Chrome plated brass lever handle. Adjustable temperature limit stop. Brass valve body. Integral spring check stops. Pressure balancing & ceramic temperature regulating cartridge with built-in check valves. Concealed integral mounting lugs. S-2292-AF showerhead with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum to meet existing ASME A112.18.1/CSA B125.1 standard. 1/2" copper tube inlets through the wall or dropped from ceiling. Vandal-resistant construction. Valve only meets ASME A112.18.1/CSA B125.1 & ASSE 1016 standards.

🗆 S-1590-AF

Exposed anti-scald balanced pressure showerpac.

🗆 VPC-2

Stainless steel vertical pipe cover, 2 ft. sections. NOTE: Must order as separate item.


OPTIONS		
SUFFIX	DESCRIPTION	
	Less showerhead	
□ 1	S-2251-AF showerhead	
□ 2	S-2252-AF showerhead	
□ 2VR	S-2252-AF vandal-resistant showerhead	
□ 3	S-2253-AF showerhead	
□ 4	S-2220-AF showerhead	
□ 5	S-2270-AF showerhead	
□ 6	S-2288-AF showerhead	
□ 7	S-2291-AF showerhead	
	Less soap dish	



SPEAKMAN®

Rough-Ins

S-1590-AF

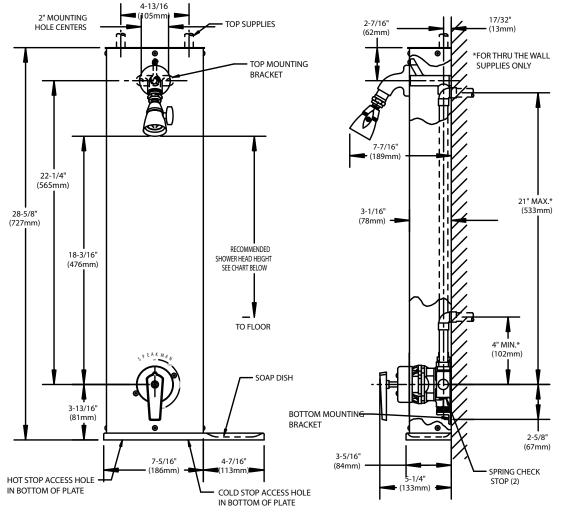

RECOMMENDED HEAD HEIGHTS		
MEN 6'0" (1	.83 Meters)	
BOYS, SENIOR HIGH	5'10" (1.78 M eters)	
BOYS, JUNIOR HIGH	5'6" (1.68 Meters)	
BOYS, ELEMENTARY	5'4" (1.63 Meters)	
WOMEN 5'8'	' (1.73 Meters)	
GIRLS, SENOIR HIGH	5'6" (1.68 Meters)	
GIRLS, JUNIOR HIGH	5'4" (1.63 Meters)	
GIRLS, ELEMENTARY	5'2" (1.58 Meters)	

NOTE: Unless otherwise specified, inlets are 1/2 copper tube. Unless otherwise specified, all dimensions are in inches and are subject to change without notice.